



ROTOR ROTATION: CLOCKWISE (view from top)
ROTOR TURN SPEED: 23 m/s (865 RPM)

MAIN MOTOR (PREPARED BY AFT)
MAKER: US MOTORS
MODEL: 8P100P2C
OUTPUT: 100 HP
POLE: 4
VOLTAGE: 460V
FREQUENCY: 60 Hz

WEIGHT (ABOUT)
OPERATING WEIGHT: 6580lbs (2990kg)
MAX. DESIGNING PRESSURE 0.5 MPa (72psig)
MAX. DESIGNING TEMPERATURE: 80°C (176°F)

COLORS
MACHINE: AFT BLUE
SAFETY COVER: SAFETY YELLOW

NOTE: FOUNDATION, PIPING AND WIRING
ARE PREPARED BY CUSTOMER

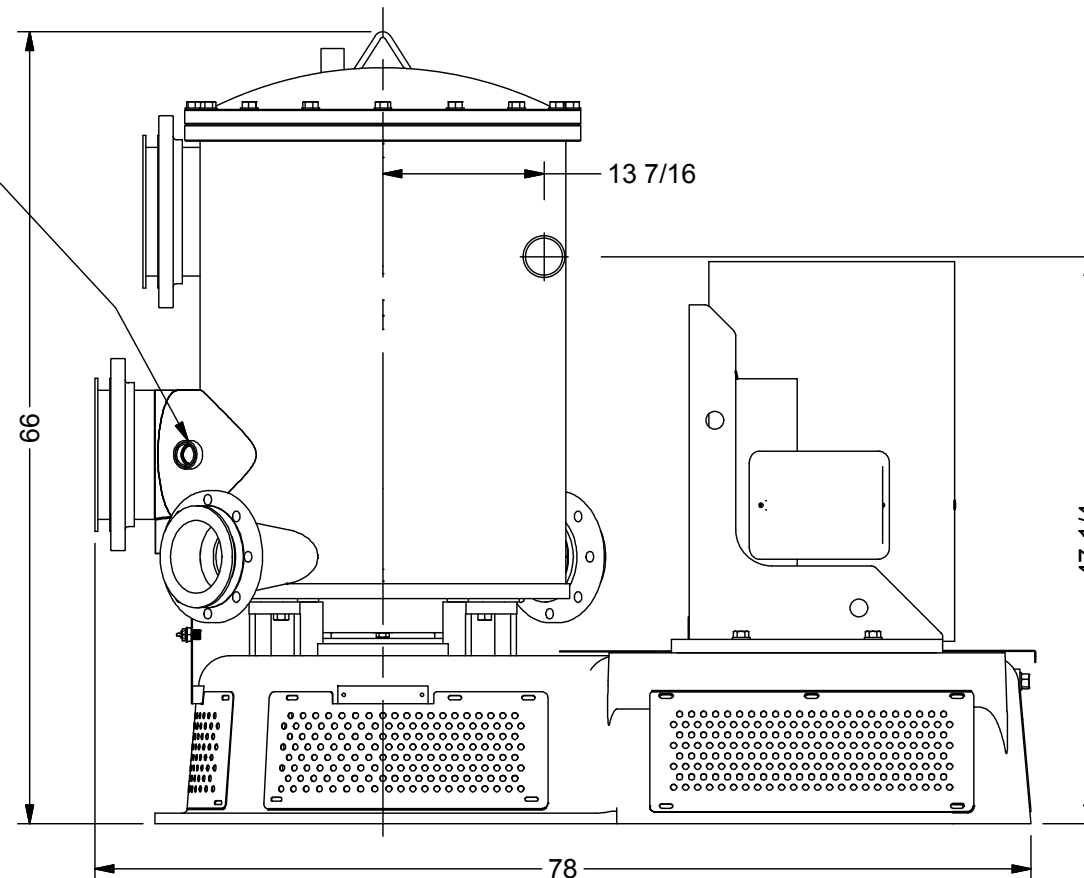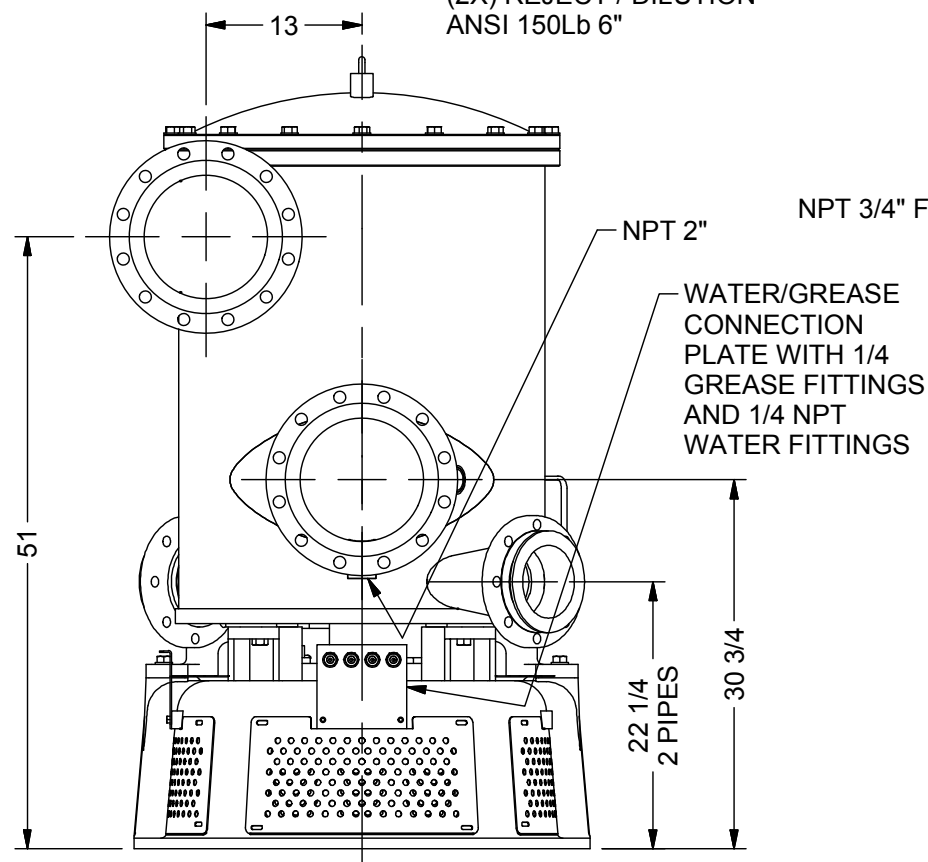



Please return the signed Specifications
(Approval Drawing) by _____

Acknowledged and approved by _____

Signature: _____ Date: _____

MATERIAL:
-LID: STAINLESS STEEL
-HOUSING: CORROSION RESISTANT STEEL
-SCREEN & MOTOR MOUNT: IRON

| | | | | | | | | |
|-------------------------------|---|-----------------|-----------------------------|-------|---|--------------------------------------|----------------------|-----------------------|
| QTY: |  | | | | AFT LENNOXVILLE | | | |
| | | DES: I.PAQUETTE | | | BIRD CENTRISORTER M400 CAPITAL EQUIPEMENT | | | |
| | | REF: | CREATION DATE 09/12/2017 | 125 ✓ | APPROVAL DRAWING | | | |
| ALL DIMENSIONS ARE IN INCH | MATERIAL | | | |  | DRAWING NUMBER CE-0003 X-1 | REVISION 0 | SHEET 1 / 1 |