



## COMEXI SL2

### SL lamination taken to its maximum expression

The Comexi SL2 laminating machine is the perfect solution for solventless lamination. Its extremely advanced technology make it the best option for the most demanding clients.

#### Technical specifications

<b>Type of adhesive</b>	SL	
<b>Maximum speed</b>	500 m/min	1640.4 ft/min
<b>Maximum web width</b>	1330 / 1530 mm	52.4 / 60.2 in
<b>Maximum diameter of the reels (Unwinder - Rewinder)</b>	1000 mm	39.4 in
<b>Core diameter Unwinder</b>	76 / 152 mm	3 / 6 in
<b>Core diameter Rewinder</b>	76 / 152 mm	3 / 6 in
<b>Maximum reel weight for 1000 mm diameter</b>	1000 Kg	2205 lb

Note: the technical characteristics are susceptible to change depending on the configuration selected.



# COMEXI SL2

The Comexi SL2 has been designed to comply with the concepts of productivity and ease of operation. Its exclusive applicator head design, consisting of complete motorisation and the use of metering sleeves, along with the option of incorporating automatic change turrets and its extremely intuitive touch environment make it the best option for solventless lamination.

## Technical features

### Optimal application

The individual motorisation of the coating head enables different speeds in the dosing rollers, metering and coating roller, making it possible to work with any type of adhesive. In addition, it speeds up cleaning tasks reducing change times.



Individual motorisation




Sleeve technology

### Fast reel changes

The sleeve technology in the metering roller significantly reduces the job change time, ensuring ease in changing jobs directly on the machine and also minimising the operator's effort.

### Laminating unit

The laminating unit is made up of a steel heating cylinder, another smaller diameter cylinder coated with high density rubber and a third counterpressure cylinder, thereby achieving perfectly even, transparent laminating, without air bubbles.

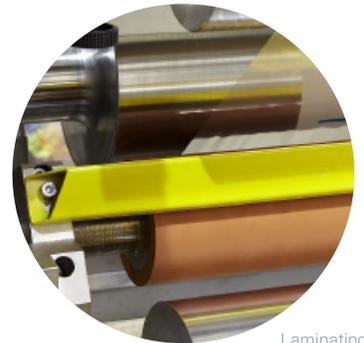

Laminating unit



Turret winder

### Productivity

The Comexi SL2 has different configurations, with unwinders and a shaftless rewinder or with a turret for automatic changes in any possible position.

### Control

Fitted with two 15" touch screens for easy access from any place. The machine is equipped with the PRODAT system, a programme that enables the viewing of information related to production and traceability, work files and preventive maintenance.



Touch screen

