



IMAGECARE-320


Quick heated speed laminator ready to laminate in 45 second.




World Wide Patent Applied AOL System (Anti Opposite Loading System)

Anti Opposite Loading System for IMAGECARE-320

►Right side tension device

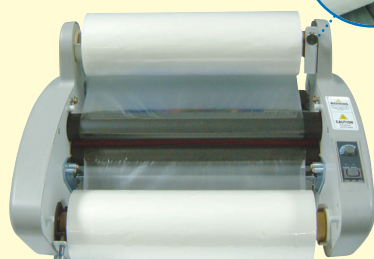

►Left side tension device



►This Anti Opposite Loading System is the first in the laminating industry in the world and we have obtained Patent from the authorities to keep all rights reserved.

IMAGECARE-320

- ◆ Cost-Effective, High Performance, Simple Desktop Roll Laminator
- ◆ Easy roll film Installation and no tension control required
- ◆ Laminating Speed (1m/min)
- ◆ Easy to use and compact design
- ◆ Quick warm-up time using Ruthenox heating

Specifications

Model Name	IMAGECARE-320
Laminating Speed	1m/min
Laminating Width	320mm
Laminating Films	25mic~250mic
Thickness of substrate(Paper)	80g/ m ² ~ 250g/ m ²
Power Requirements	220~240V, 50/60Hz
Power Consumption	600W, 2.7A
Warm Up Time	45 second
Heating System	Heatshoe Ruthenox Heater
Operating Temperature	130 °C Max.
Speed Control	Fixed
Temperature Control	Knob & Volume
Pressure Adjustment	Manual
Film Core	Plastic (AOL System)
Dimensions(WxLxH)	445 x 367 x 670mm
Type of Main Motor	Shading Pole Geared Motor t30

GMP reserves the right to after change specifications without prior notice.



ISO 9001:2000 CERTIFICATE



CERTIFICATE NUMBER: RQ00507

