Revolving Tray Ovens

Built for Life

Middleby Marshall full-size revolving tray ovens are the most reliable, most long-life ovens of their type. They have been used successfully in all kinds of applications, around the world. It is not unusual to see one of these ovens hard at work, dayafter-day, after 50-some years of continuous service!


A few of the extraordinary features included in both models H and K:


Separate framework of I-beams and channels*


- Crackproof spider wheels*
- Double-stabilized trays*
- Positive gear drive not a mere chain*
- Emergency handwheel in case of power failure, the trays can be turned faster than normal (optional) for quick unloading
- Electronic safeties, instant acting, state-of-the-art

- Arched inner crown, eliminates heattrap zones, helps retain moisture
- Aluminized steel inner walls (not just coated iron) which bounce back 80% or more of the radiant heat, resists corrosion that destroys ordinary metals
- Flush outer walls with no protruding box panels or boltheads
- Visible baking by vision windows and interior floodlight

MODEL K

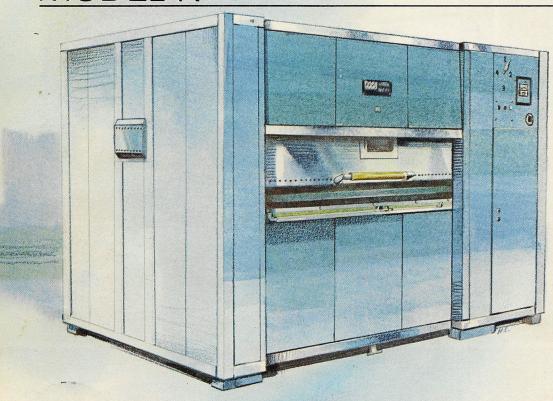





Recommended draft: .02 to .04 W.C. at stack outlet.

Leave 18" between non-machinery side to wall. (Check factory for alternatives if insufficient space.)

Machinery may be ordered on left side, at buyer's

option.

For precise location of bearings, lights, etc. contact

factory.

For layout of masonry bases, contact factory.

*NOTE: Sizes 752-7 and 754-7 are for baking only.
Insufficient clearance for meat roasting features.

ENGINEERING DATA

Oven Size	No.of Trays	Tray Size	No. of 18 x 26 Bun Pans	Gas Pressure	BTU per hour max.	Total wt.	Combustion Outlet C.F.M	Door Vent C.F.M.	A	В	С	D	E	F	G	н	J
750	4	20 x 56	8	4" to 6"	80,000	5,000	45	480	8'-10"	3'-5"	2'-0"	5'-10"	2'-3%"	2'-6%"	4'-9"	6'-5"	40"
751	.4	20 x 80	12	4" to 6"	128,000	6,000	70	455	10'-10"	4'-5"	2'-0"	5'-10"	2'-3%"	2'-6%"	6'-9"	6'-5"	40"
752-4	4	26 x 56	12	4" to 6"	120,000	6,000	65	460	8'-10"	3'-5"	2'-0"	6'-11"	2'-10%"	3'-1%"	4'-9"	7'-3"	45"
752-6	6	20 x 56	12	4" to 6"	120,000	6,000	65	460	8'-10"	3'-5"	2'-0"	6'-11"	2'-10%"	3'-1%"	4'-9"	7'-3"	45"
752-7*	7	18 x 56	14	4" to 6"	120,000	6,000	65	460	8'-10"	3'-5"	2'-0"	6'-11"	2'-10%"	3'-1%"	4'-9"	.7'-3"	45"
753	5	26 x 56	15	4" to 6"	138,000	6,700	75	450	8'-10"	3'-5"	2'-0"	7'-9"	3'-3%"	3'-5%"	4'-9"	7'-9"	45"
754-4	4	26 x 80	16	4" to 6"	192,000	7,000	100	425	10'-10"	4'-5"	2'-0"	6'-11"	2'-10%"	3'-1%"	6'-9"	7'-3"	45"
754-6	6	20 x 80	18	4" to 6"	192,000	7,000	100	425	10'-10"	4'-5"	2'-0"	6'-11"	2'-10%"	3'-1%"	6'-9"	7'-3"	45"
754-7*	7	18 x 80	21	4" to 6"	192,000	7,000	100	425	10'-10"	4'-5"	2'-0"	6'-11"	2'-10%"	3'-1%"	6'-9"	7'-3"	45"
755-5	5	26 x 80	20	4" to 6"	220,000	8,000	115	410	10'-10"	4'-5"	2'-0"	7'-9"	3'-3%"	3'-5%"	6'-9"	7'-9"	45"
756-5	5	26 x 92	25	4" to 6"	230,000	9,000	120	1480	11'-10"	4'-11"	2'-0"	7'-9"	3'-3%"	3'-5%"	7'-9"	7'-9"	45"
757-5	5	26 x 110	30	4" to 6"	274,000	10,000	145	1455	13'-4"	5'-8"	2'-0"	7'-9"	3'-3%"	3'-5%"	9'-3"	7'-9"	45"