

- Fluid drive insures "smooth start and stop" of tray
- Brace rods and levelizers on trays*
- Ventilated, counterbalanced disappearing door*
- World's finest insulation system*

Electrically-fired revolving tray ovens are also available. Contact factory for complete specifications.

*See further details, pictures, on following pages

Most efficient design



The front-loading revolving tray oven makes the best use of space and operator time. Because the product is moved continuously through all the oven's heat zones, consistent baking is assured. Loading and unloading is at a convenient height, permitting maximum observation of the work area without excessive stretching or bending.

Two models are available, K and H, below, each with a number of specific parameters to meet your own exact needs.

If more than one oven is required, side-to-side groupings with consolidated control panels can be arranged.

All K & H ovens are assembled by factory-trained agents at your location.

MODEL H

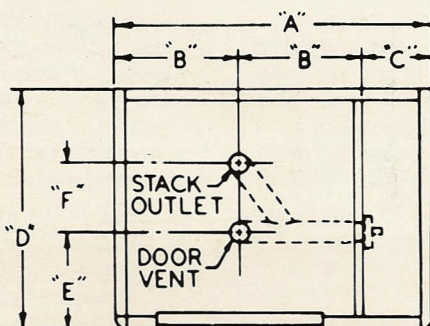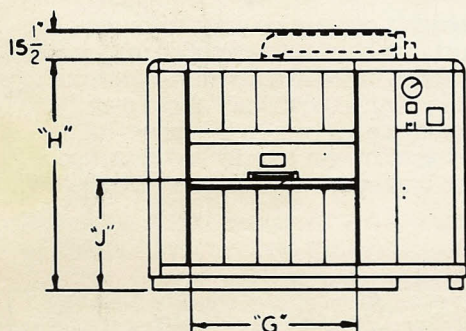

Recommended draft: .02 to .04 W.C. at stack outlet.

Leave 18" between non-machinery side to wall. (Check factory for alternatives if insufficient space.) Rear and machinery sides can go flush to wall.

Machinery may be ordered on left side, at buyer's option.

For precise location of bearings, lights, etc. contact factory.

For layout of masonry bases, contact factory.

ENGINEERING DATA

Oven Size	No. of Trays	Tray Size	No. of 18 x 26 Bun Pans	Gas Pressure	BTU per hour max.	Total wt. in lbs.	Combustion Outlet C.F.M.	Door Vent C.F.M.	A	B	C	D	E	F	G	H	J
780	5	26 x 56	15	4" to 6"	125,000	9,100	65	1535	10'-0"	3'-9"	2'-6"	8'-5"	3'-4 1/2"	2'-5 1/2"	4'-7"	8'-0"	46"
781	5	26 x 74	20	4" to 6"	175,000	10,400	90	1510	11'-6"	4'-6"	2'-6"	8'-5"	3'-4 1/2"	2'-5 1/2"	6'-1"	8'-0"	46"
782	5	26 x 92	25	4" to 6"	225,000	11,800	105	1495	13'-0"	5'-3"	2'-6"	8'-5"	3'-4 1/2"	2'-5 1/2"	7'-7"	8'-0"	46"
783	5	26 x 110	30	4" to 6"	250,000	13,100	145	1455	14'-6"	6'-0"	2'-6"	8'-5"	3'-4 1/2"	2'-5 1/2"	9'-1"	8'-0"	46"
719	6	26 x 60	18	4" to 6"	150,000	11,500	80	1520	10'-4"	3'-11"	2'-6"	9'-4"	3'-10"	2'-5 1/2"	4'-11"	8'-11"	46"
723	6	26 x 78	24	4" to 6"	210,000	12,500	110	1490	11'-10"	4'-8"	2'-6"	9'-4"	3'-10"	2'-5 1/2"	6'-5"	8'-11"	46"
724	6	26 x 96	30	4" to 6"	240,000	13,500	125	1475	13'-4"	5'-5"	2'-6"	9'-4"	3'-10"	2'-5 1/2"	7'-11"	8'-11"	46"
725	6	26 x 110	36	4" to 6"	330,000	14,500	175	1425	14'-6"	6'-0"	2'-6"	9'-4"	3'-10"	2'-5 1/2"	9'-1"	8'-11"	46"
726	8	26 x 96	40	4" to 6"	320,000	16,500	170	1430	13'-4"	5'-5"	2'-6"	10'-5"	4'-4 1/2"	2'-5 1/2"	7'-11"	10'-0"	46"
727	8	26 x 110	48	4" to 6"	440,000	17,500	230	1370	14'-6"	6'-0"	2'-6"	10'-5"	4'-4 1/2"	2'-5 1/2"	9'-1"	10'-0"	46"
728	8	26 x 134	56	4" to 6"	480,000	18,500	250	1350	16'-6"	7'-0"	2'-6"	10'-5"	4'-4 1/2"	2'-5 1/2"	11'-1"	10'-0"	46"
729	10	26 x 110	60	4" to 6"	550,000	20,500	285	1315	14'-6"	6'-0"	2'-6"	11'-9"	5'-0 1/2"	2'-5 1/2"	9'-1"	11'-4"	46"
730	10	26 x 134	70	4" to 6"	600,000	21,500	315	1285	16'-6"	7'-0"	2'-6"	11'-9"	5'-0 1/2"	2'-5 1/2"	11'-1"	11'-4"	46"
731	10	26 x 146	80	4" to 6"	653,000	22,500	340	1260	17'-6"	7'-6"	2'-6"	11'-0"	5'-0 1/2"	2'-5 1/2"	12'-1"	11'-4"	46"

