


F.L.Smithe WR




model WR

Curtius
TECHNOLOGIES, INC
Tel: +1-404-352-1000
www.curtius.com

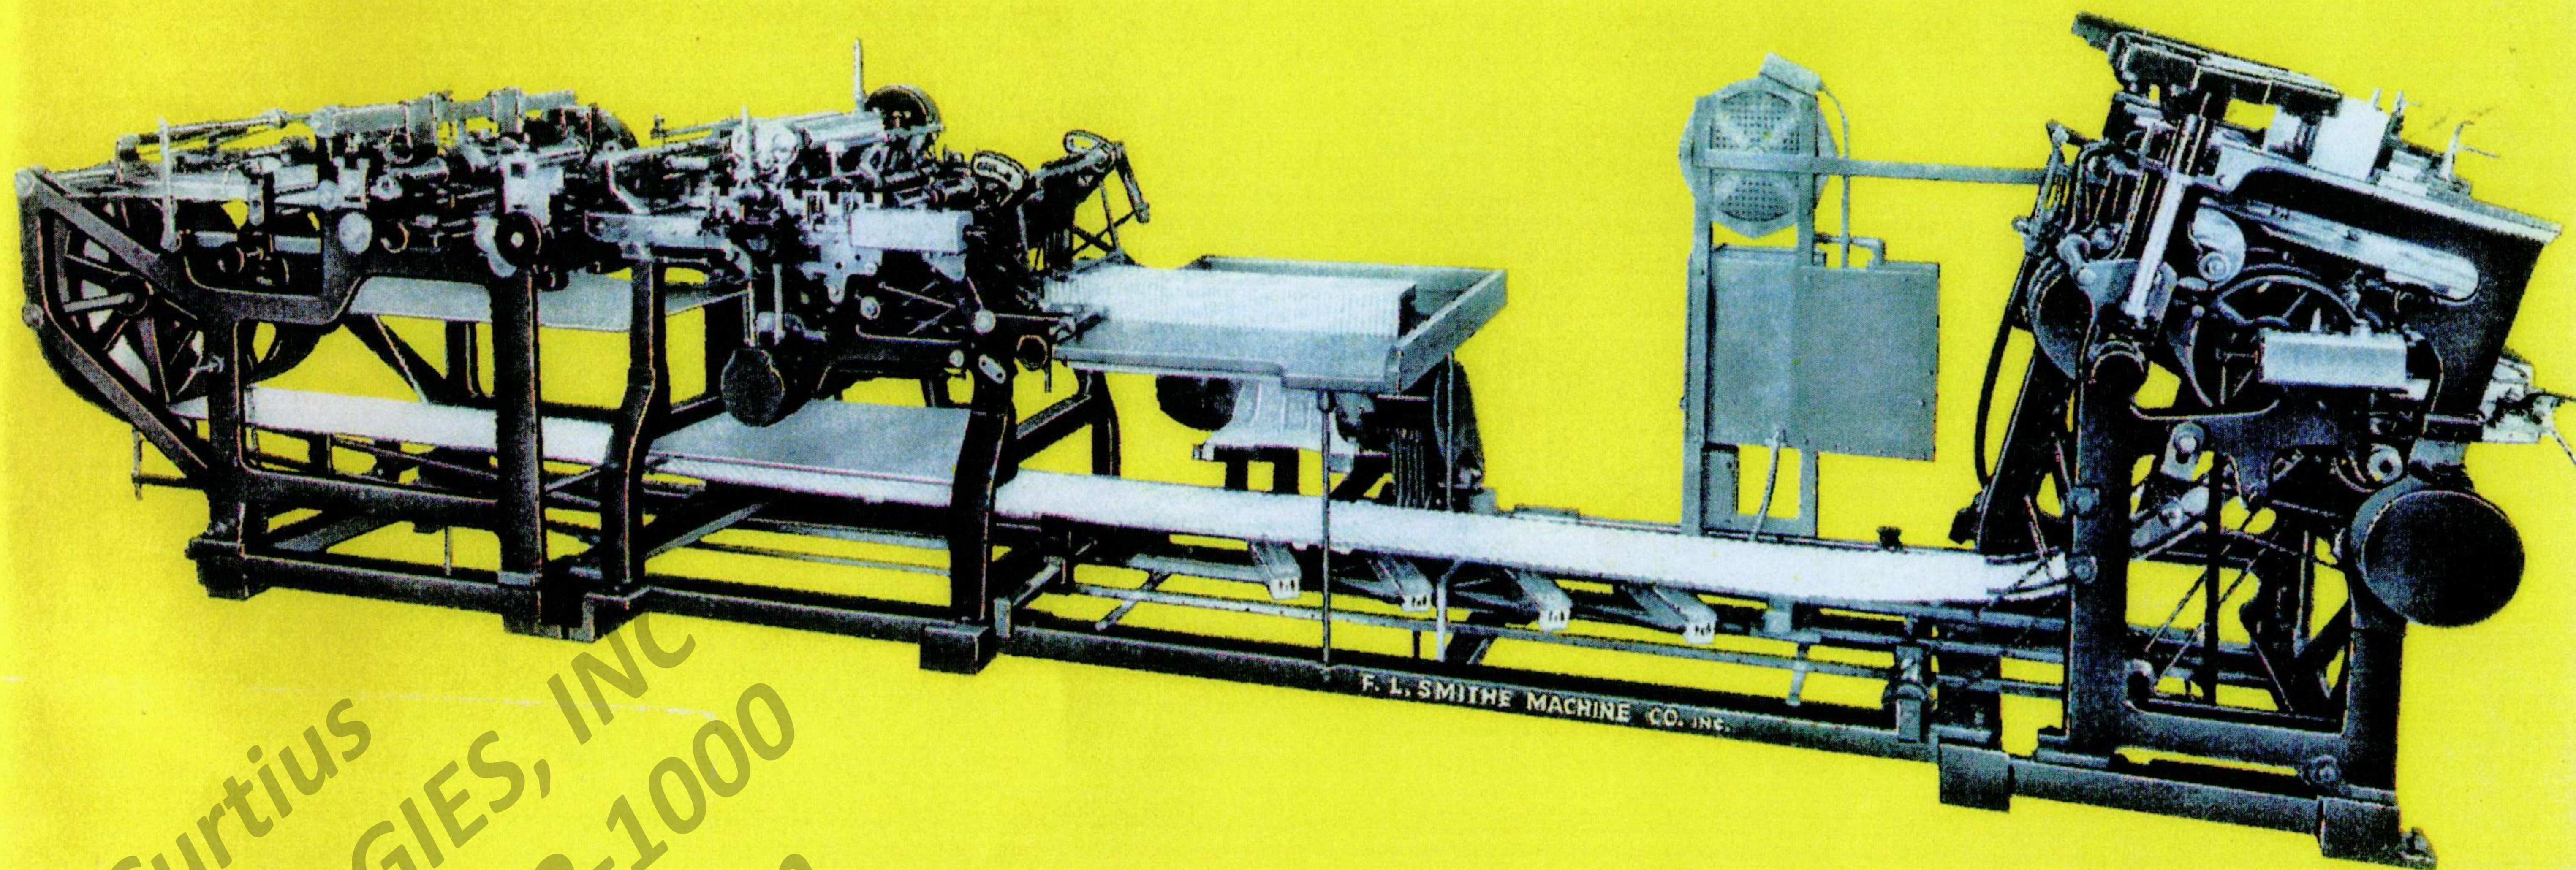

Curtius
curtius technologies, inc.

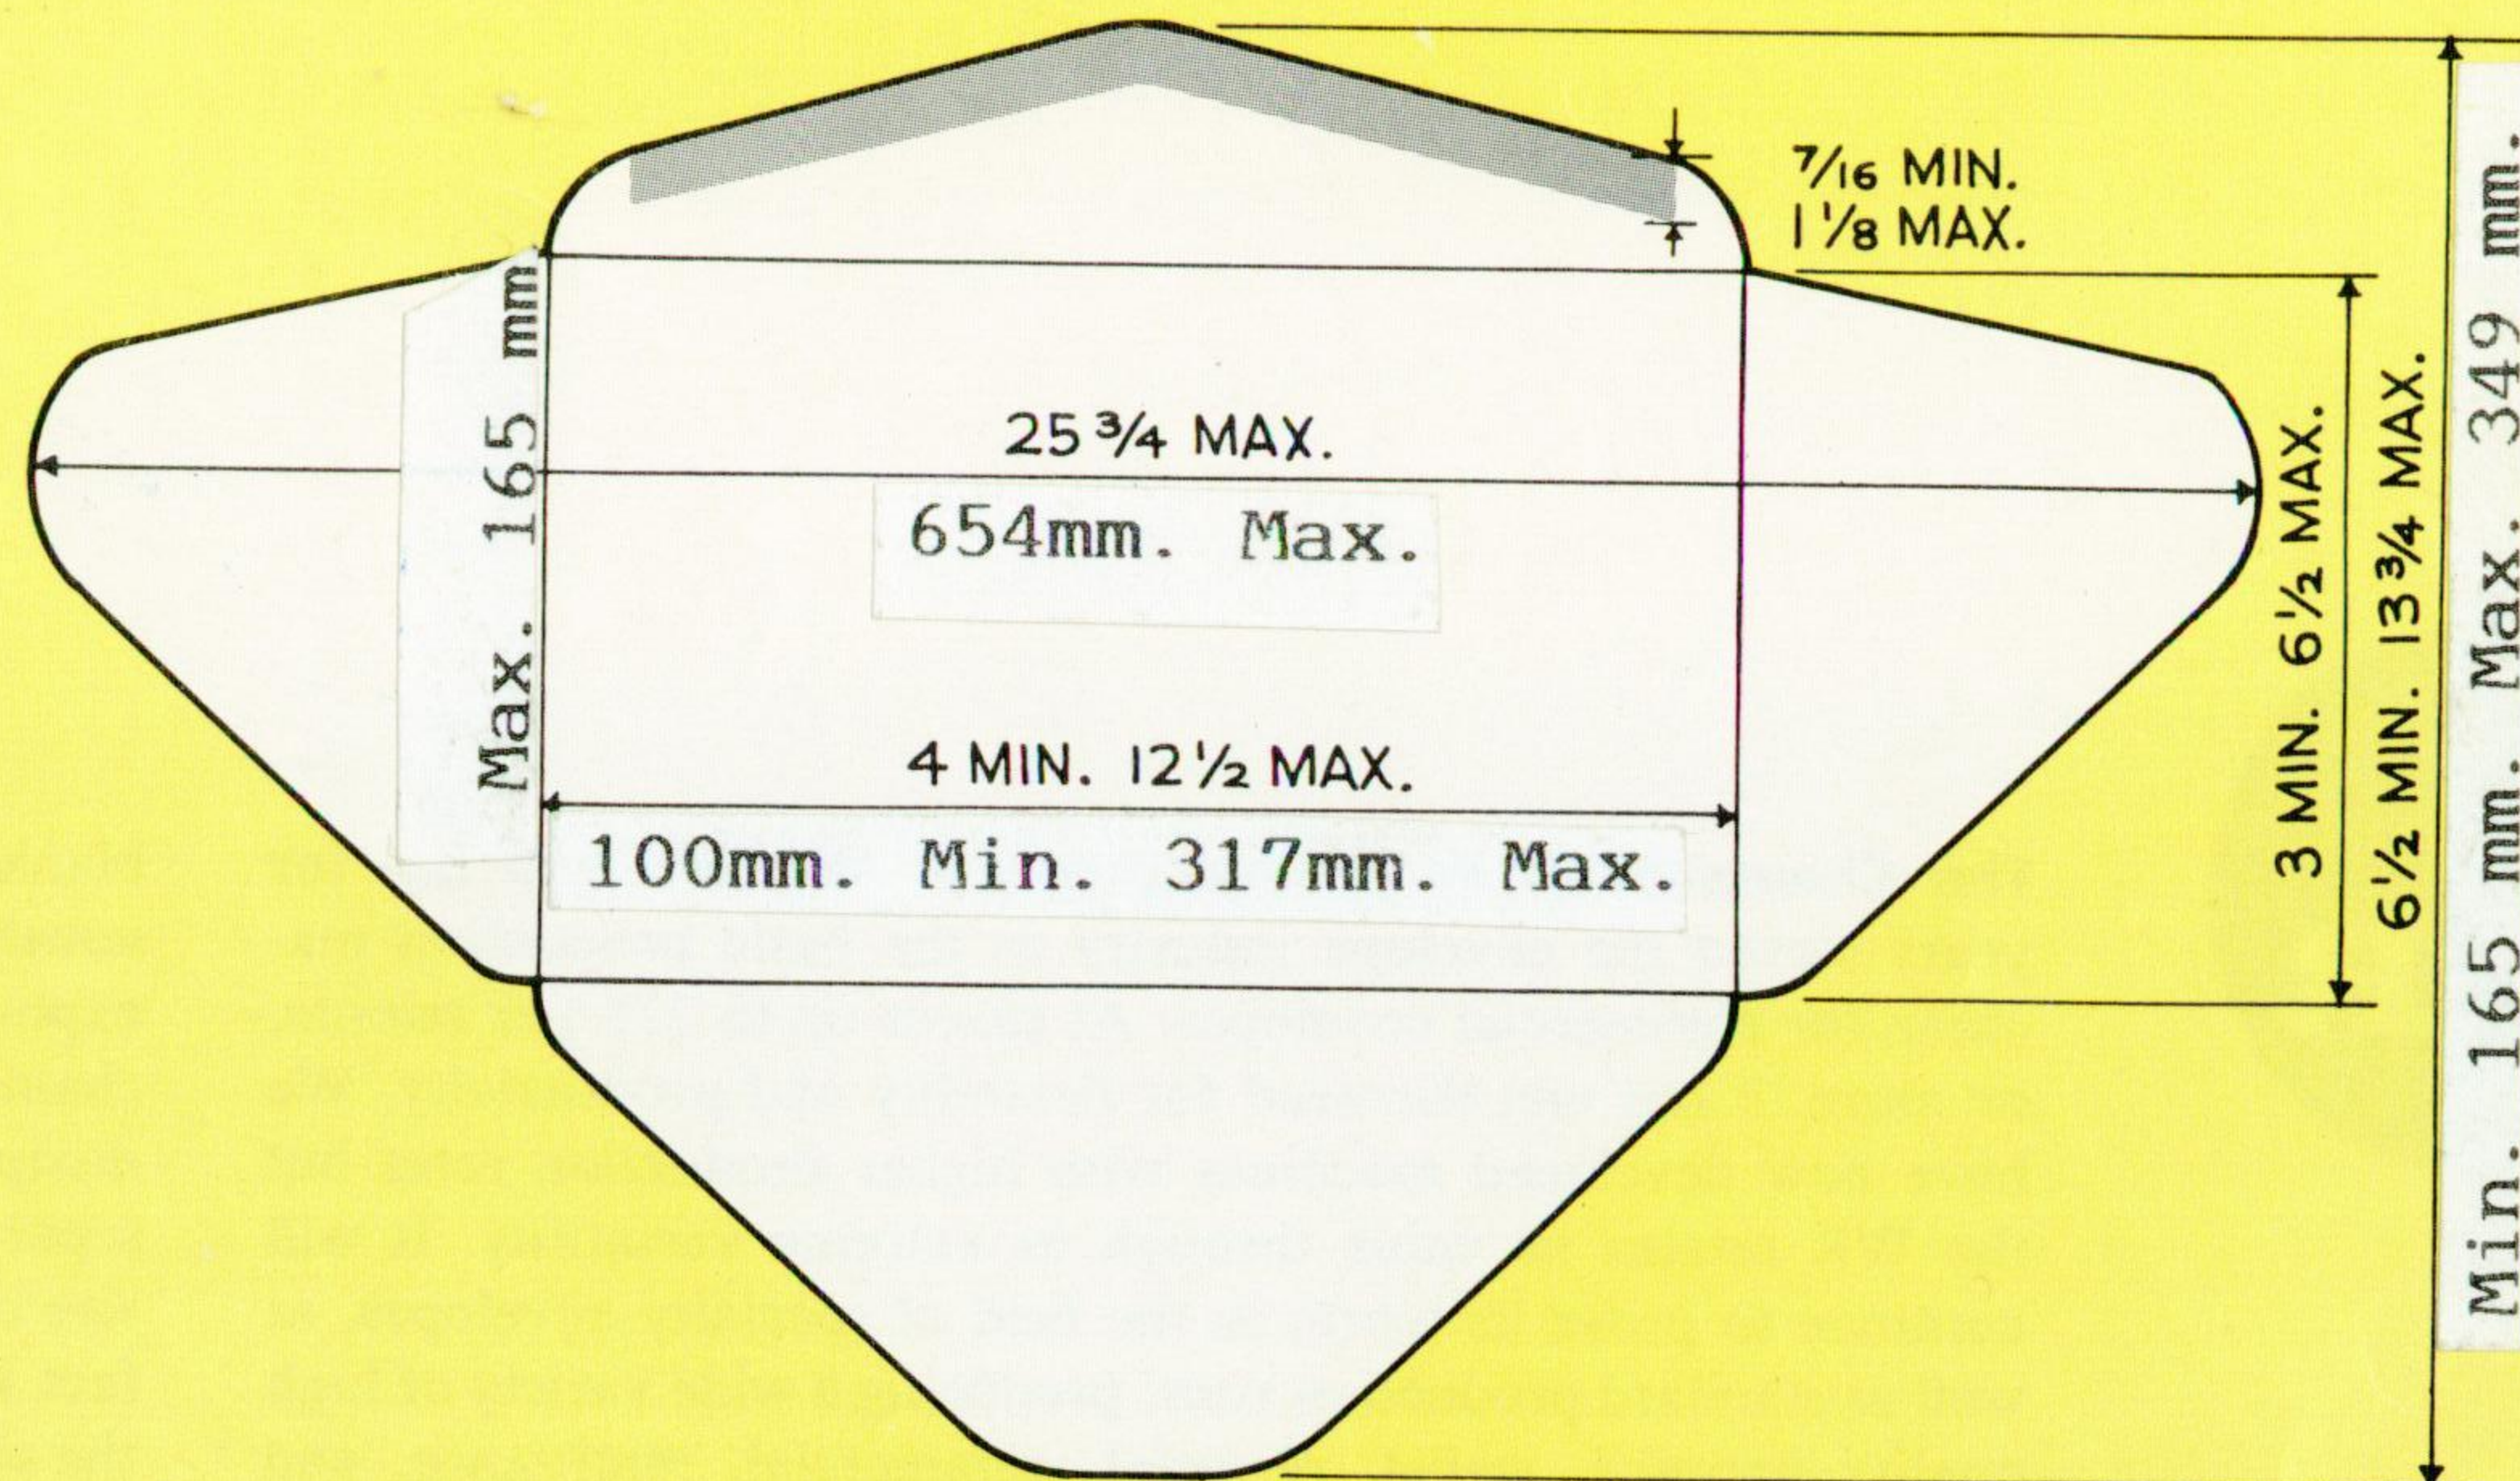


range of
envelopes

model

WR

ANY ANGLE BUT
NEVER STRAIGHT

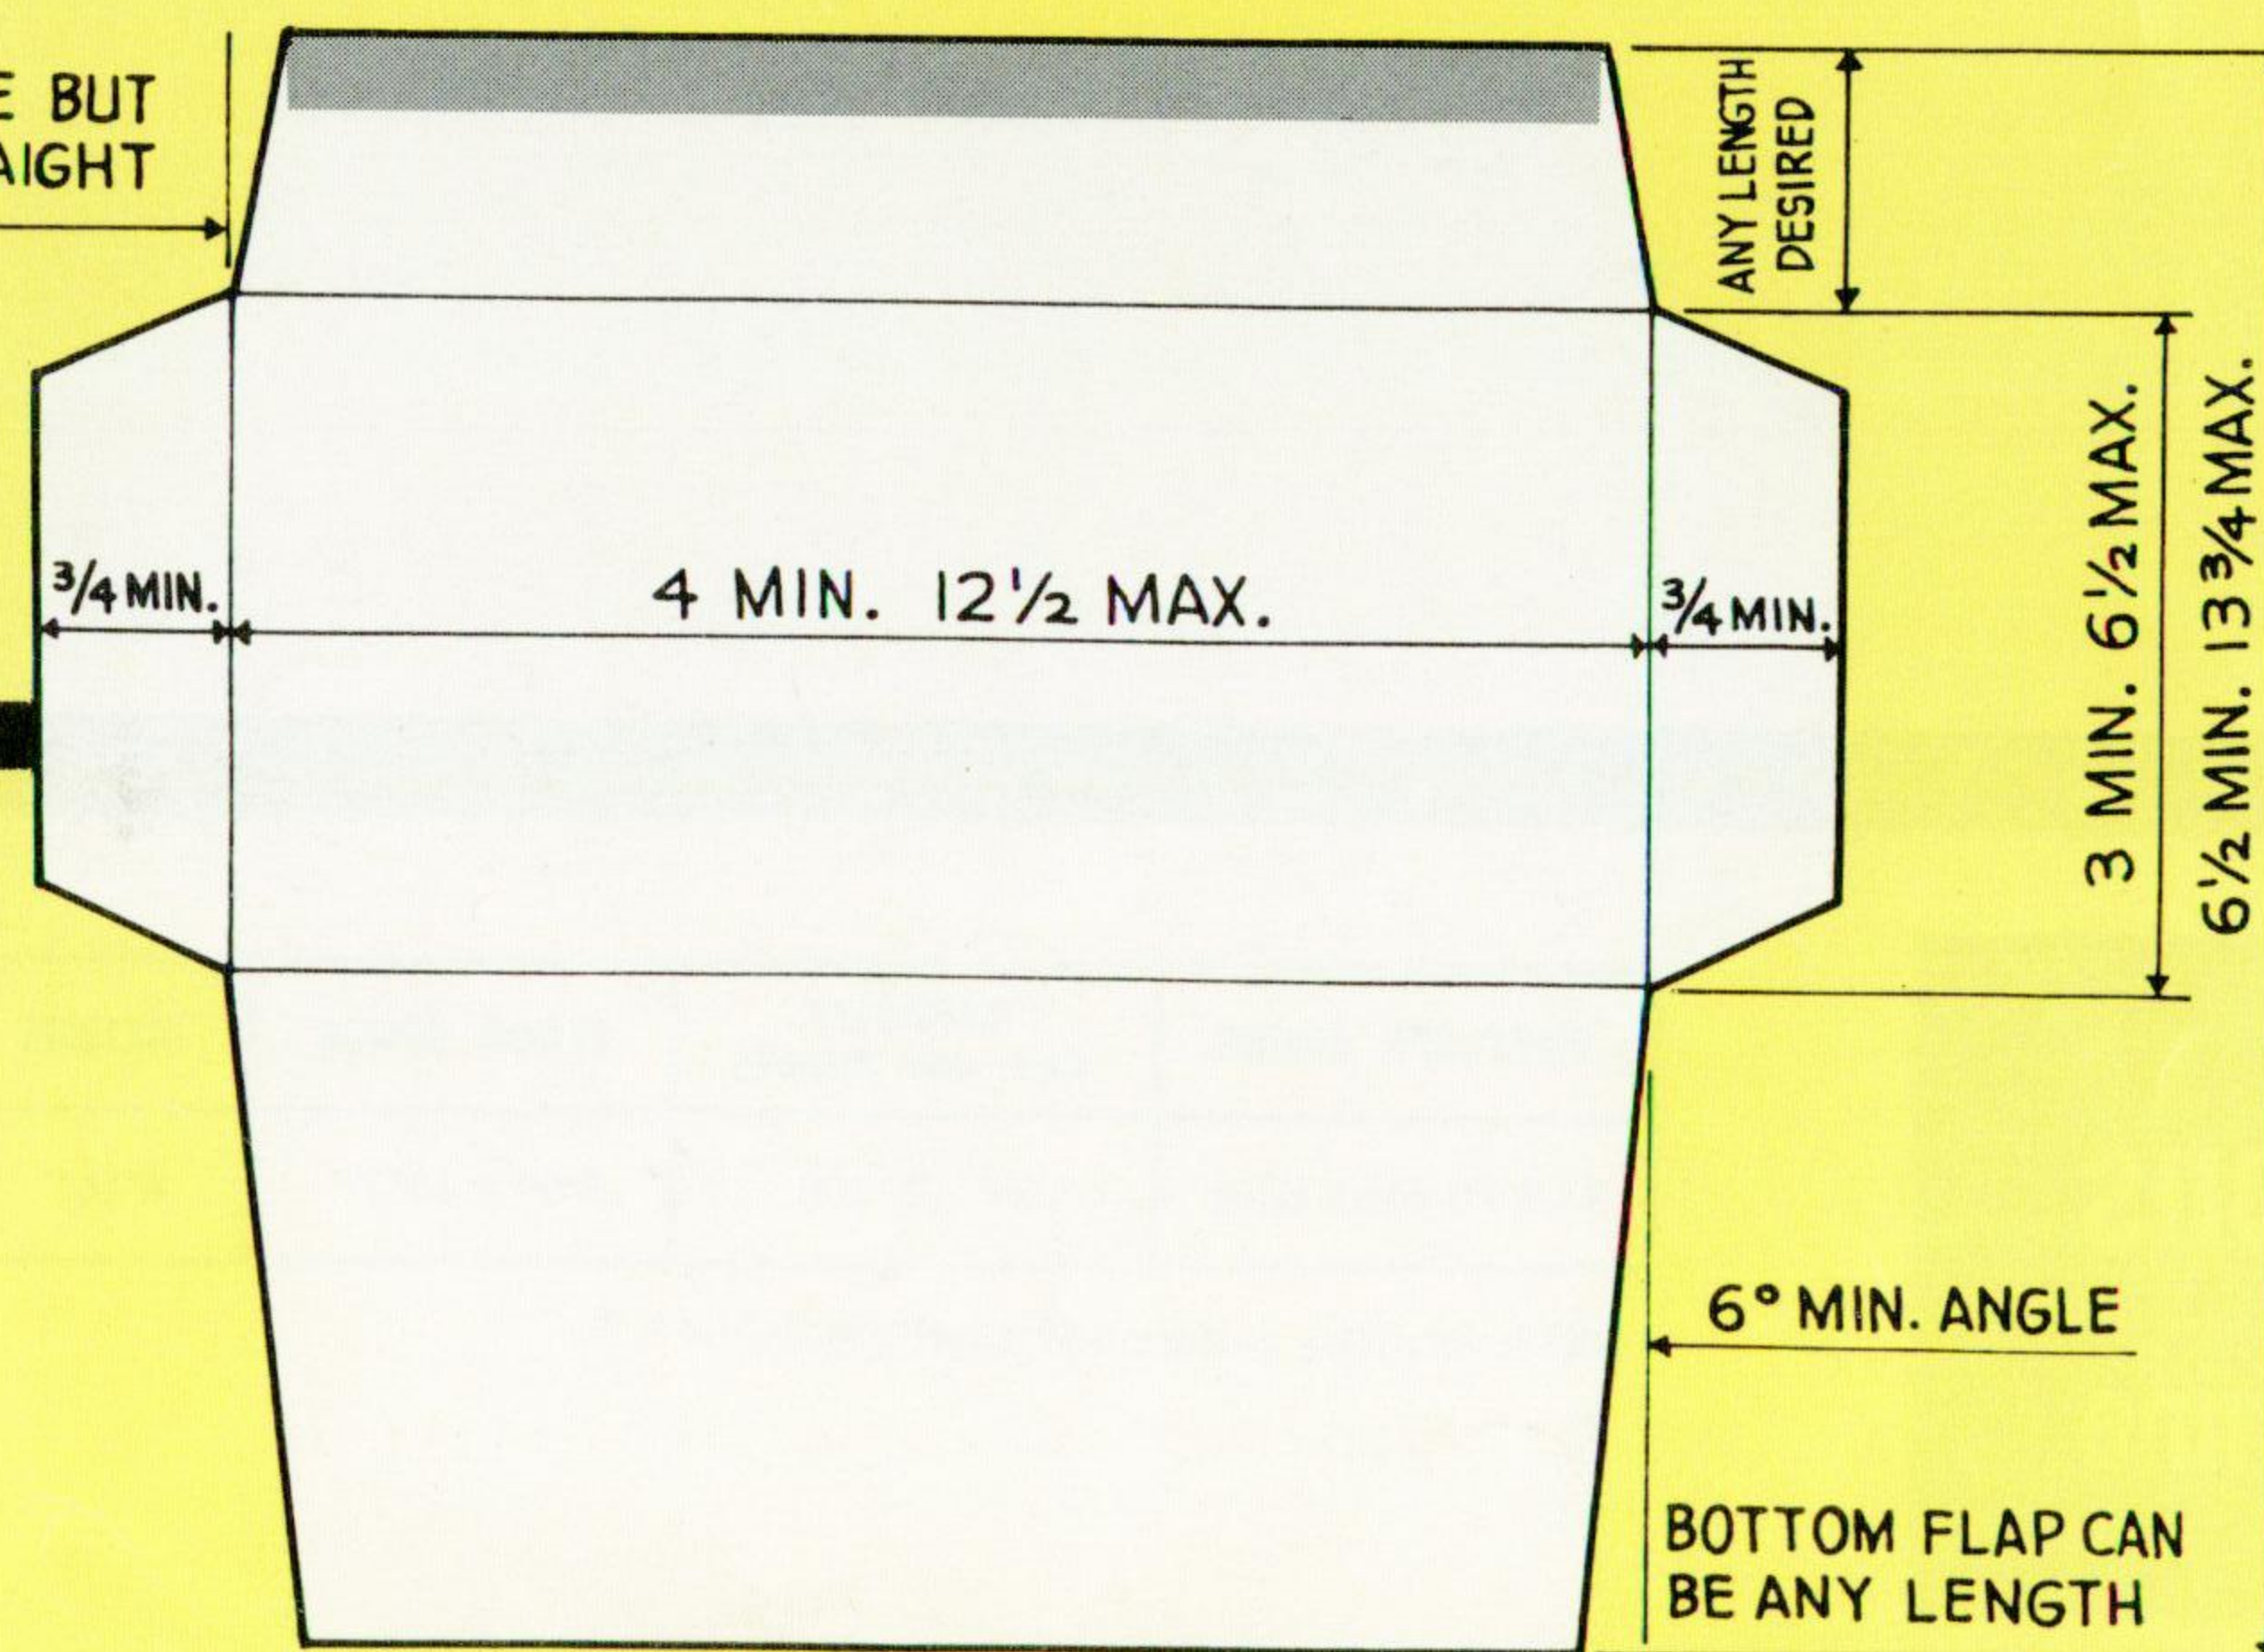



The Champion Wide Range Standard Machine WR has for years served the envelope industry as the basic production machine for commercial envelopes. At speeds up to 275 per minute, or more, it has met the need for flexibility and productivity. We have now developed machines with higher production rates but the WR retains its value through its extreme versatility. It will continue to prove its worth in the field of specialty envelopes, as well as standard production runs, producing a wide variety of high quality baronial, wallet, pictorial, commercial, remittance, and pennysaver envelopes; all in any size and shape from 3" x 4" to 6½" x 12½". Changes from one size to another are made with a few simple parts and usually take less than an hour.

The WR Machine operates on the rotary principle; Previously cut

blanks are fed directly into overlap from the bottom of a continuously reloadable stack. The seal gum is then applied over the exposed surface in a smooth, even layer. Drying is done in a clip chain conveyer by means of new quartz lamp drying units which dissipate a minimum of heat into your plant. The blanks are then separated and aligned by traveling pins for scoring to the exact size of the envelope. The precision of scoring is what leads to perfect folding, which is done by former blades and plow shares for the side flaps, a lifter mechanism for the bottom flap, and a reversing folder for the seal flap. The finished envelopes, accurately counted, are then delivered to a table.

Every adjustment is extremely convenient to the adjuster. The WR Machine has long been noted for its simplicity of design, accessibility and ease of adjustment.

specifications
WR machine

ENVELOPE RANGE	CAPACITY Env. per minute	FLOOR SPACE	HEIGHT	POWER (DRIVE)		SHIPPING WEIGHT		SHIPPING DIMENSIONS
						GROSS	NET	
3 x 4 TO 6½ x 12½	UP TO 300	5'0" x 19'7"	4'10"	3 HP	FEEDER DRIER	2650 LBS. 770 LBS.	2400 LBS. 520 LBS.	69"L. x 57"W. x 65"H. 112"L. x 41"W. x 18"H.
					FOLDER ALIGNER	2000 LBS. 2400 LBS.	1570 LBS. 2100 LBS.	68"L. x 47"W. x 60"H. 92"L. x 53"W. x 60"H.

NOTE: Auxiliary motors add approximately 1 H P.

Capacity, weights and dimensions approximate.