

No. 140-2

1³/₄" Pitch


All Steel Stock Sprockets

Martin


Double-Type B & C

No. Teeth	Catalog Number	Outside Diameter	Type	Bore (inches)		Hub (inches)		Weight Lbs. (Approx.)
				Stock	Rec. Max.	Dia.	Length Thru	
13	D140B13	8.150	B	1 $\frac{1}{2}$	3 $\frac{3}{8}$	5	3 $\frac{3}{4}$	29
14	D140B14	8.720	B	1 $\frac{1}{2}$	3 $\frac{1}{2}$	5 $\frac{1}{2}$	3 $\frac{3}{4}$	34.8
15	D140B15	9.280	B	1 $\frac{1}{2}$	4 $\frac{1}{2}$	6 $\frac{1}{2}$	3 $\frac{3}{4}$	42.5
16	D140B16	9.850	B	1 $\frac{1}{2}$	5 $\frac{1}{4}$	7	4	48.1
17	D140B17	10.410	B	1 $\frac{1}{2}$	5 $\frac{1}{2}$	7	4	57.5
18	D140B18	10.980	B	1 $\frac{1}{2}$	5 $\frac{3}{4}$	7	4	65.6
19	D140B19	11.540	B	1 $\frac{1}{2}$	5 $\frac{1}{2}$	7	4	72.0
20	D140B20	12.100	B	1 $\frac{1}{2}$	5 $\frac{1}{2}$	7	4	76.0
21	D140B21	12.660	B	1 $\frac{1}{2}$	5 $\frac{1}{2}$	7	4	82.0
22	D140B22	13.220	B	1 $\frac{1}{2}$	5 $\frac{1}{2}$	7	4	94.0
23	D140B23	13.780	B	1 $\frac{1}{2}$	5 $\frac{1}{2}$	7	4	100
24	D140B24	14.340	B	1 $\frac{1}{2}$	5 $\frac{1}{2}$	7	4	104
25	D140B25	14.900	B	1 $\frac{1}{2}$	5 $\frac{1}{2}$	7	4	120
26	D140B26	15.460	B	1 $\frac{1}{2}$	5 $\frac{1}{2}$	7	4	128
35	D140C35	20.490	C	1 $\frac{1}{2}$	5 $\frac{1}{2}$	7 $\frac{1}{2}$	6	180
45	D140C45	26.080	C	1 $\frac{1}{2}$	5 $\frac{1}{2}$	7 $\frac{1}{2}$	6	232
60	D140C60	34.440	C	1 $\frac{1}{2}$	6 $\frac{1}{2}$	9 $\frac{1}{2}$	6 $\frac{1}{4}$	372



Maximum bores shown will accommodate standard keyseat and setscrew over keyseat. Slightly larger bores are possible with no keyseat, shallow keyseat, or setscrew at angle to keyseat.



TYPE B



TYPE C

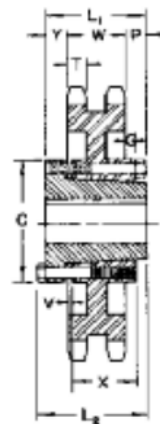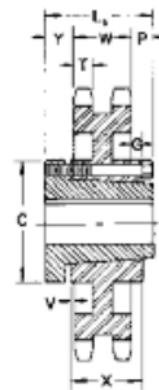QD — TYPE C₅QD — TYPE C₆