


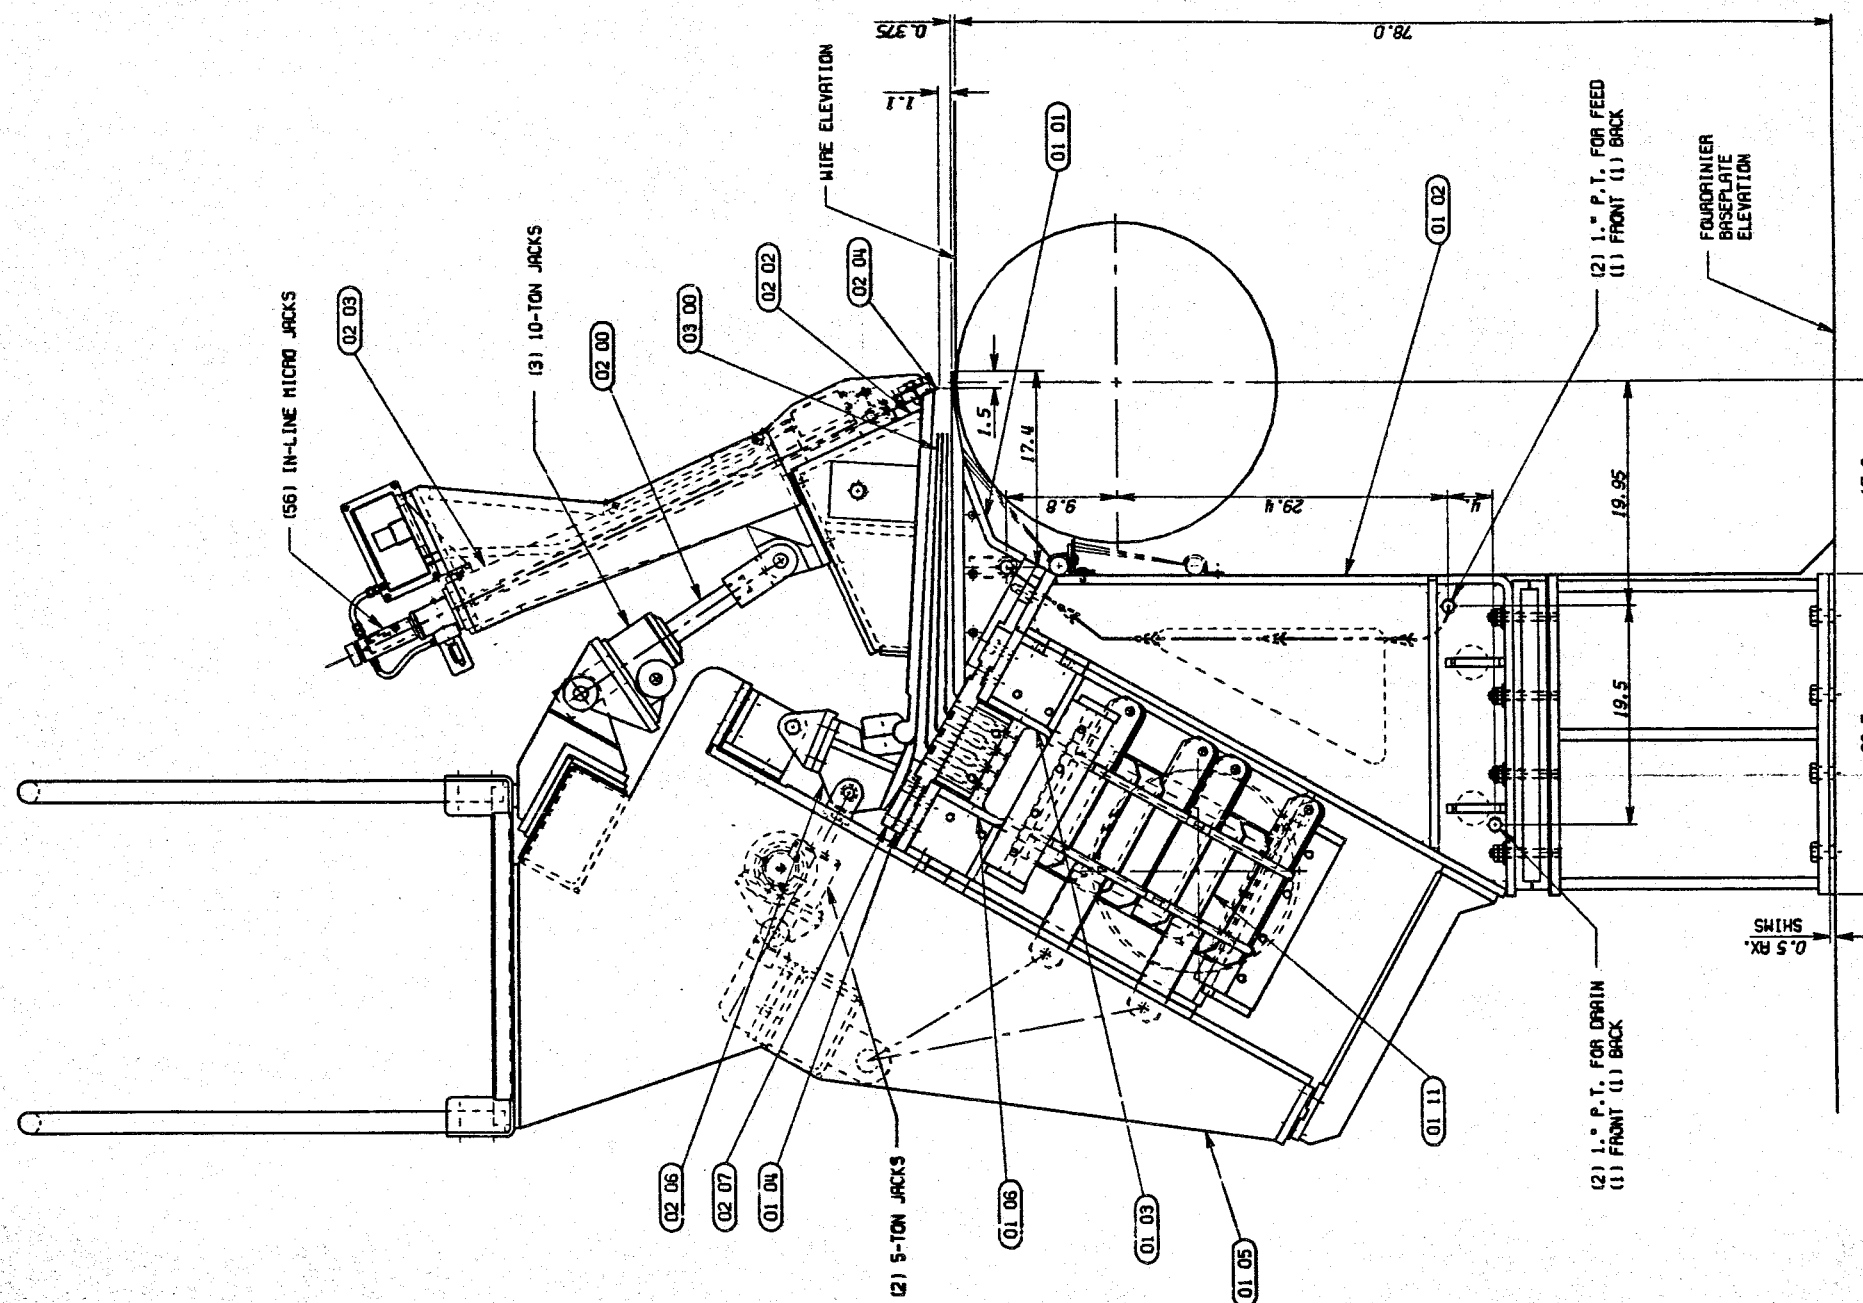

- 1 SLICE OPENING IS ADJUSTABLE FROM .25 TO 6". SLICE LIP SET-BACK IS ADJUSTABLE FROM 0. TO 3". BEHIND APRON LIP TIP. SET-UP = 1.1 BACK AND 1.5 OPEN.
- 2 SLICE CROSS SHAFT TURNS AT 200. RPM MAX. CROSS SHAFT GUARDS ARE BY MILL.
- 3 KEEP SHEET REMOVAL AREA CLEAR. DO NOT MOUNT ANY EQUIPMENT ON HEADBOX THAT WILL INTERFERE WITH CONVEYOR SHEET REMOVAL.
- 4 BELOIT FURNISHES .5 THICK SHIM PACKS. MILL TO ADD OR REMOVE SHIMS AS REQUIRED TO ACHIEVE SET-UP DIMENSIONS.

- | | |
|---------------------------------------|--|
| (0A 00) LIST OF DOCUMENTS | (07 04) VELOCITY PROBE MOUNTING |
| (0C 00) CONCEPT III HEADBOX (ELEV) | (07 05) INDICATOR, 1500 FPM HEAD |
| (0D 00) CONCEPT III HEADBOX (SECTION) | (08 00) ELECTRO-POLISHING INSTRUCTIONS |
| (0E 00) CONCEPT III HEADBOX (GAGE) | |
| (07 0C) INDICATOR SLICE POSITION | |
| (70 01) INDICATOR SLICE POSITION LVDT | |
| (70 02) LIFT STOP, SLICE | |
| (07 03) SIGHT GAGE, DIFF. PRESSURE | |

(A1) (A2)

THIS PRINT IS THE PROPERTY OF BELOIT CORPORATION. THE INFORMATION THEREON IS SUBMITTED IN CONFIDENCE.	
ORDER NO. B5000 FILE NO. 611 DEPT. NO. 611 DATE 4-2-87	CUSTOMER NAME S.D. WARREN COMPANY MILL MUSKEGON, MICHIGAN DRAIN ROT CONCEPT III HEADBOX (IC SECTION)
NACH. NO. 4 APP'D. 1 J80 APP'D. 2 J80 SCALE 1/5 SHEET 1 OF 1	BELOIT CORPORATION REFERENCE DRAWING LC-1366-6-4-0 IDENTIFICATION NUMBER MA-1366-6-4-1