


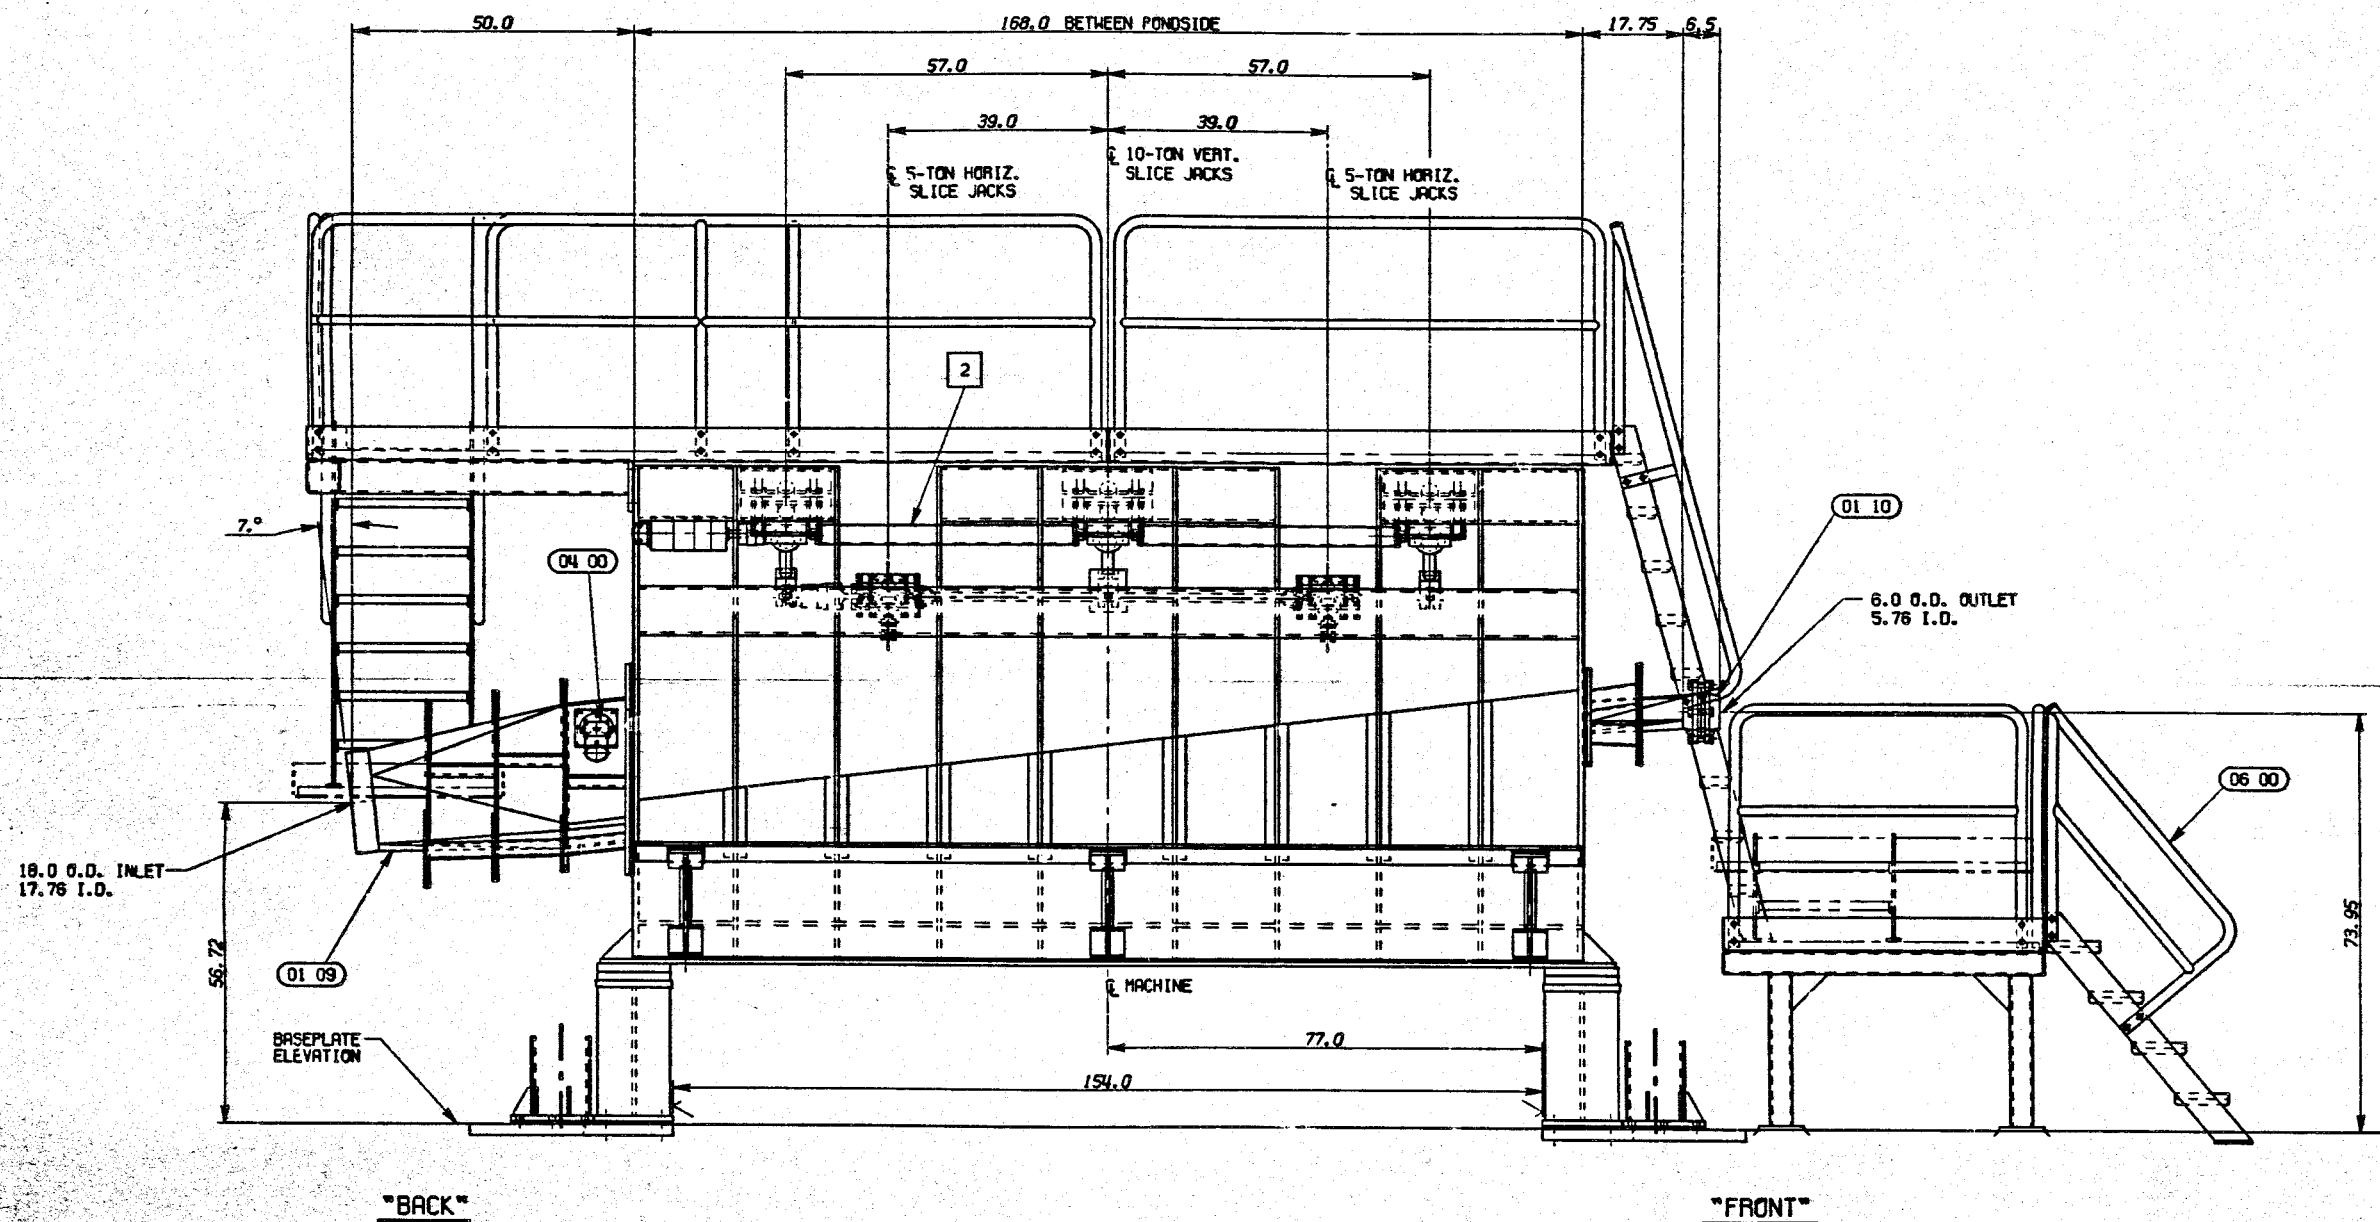

- 1 SLICE OPENING IS ADJUSTABLE FROM .25 TO 6". SLICE LIP SET-BACK IS ADJUSTABLE FROM 0. TO 3". BEHIND APRON LIP TIP. SET-UP • 1.1 BACK AND 1.5 OPEN.
- 2 SLICE CROSS SHAFT TURNS AT 200. RPM MAX. CROSS SHAFT GUARDS ARE BY MILL.
- 3 KEEP SHEET REMOVAL AREA CLEAR. DO NOT MOUNT ANY EQUIPMENT ON HEADBOX THAT WILL INTERFERE WITH CONVEYOR SHEET REMOVAL.
- 4 BELOIT FURNISHES .5 THICK SHIM PACKS. MILL TO ADD OR REMOVE SHIMS AS REQUIRED TO ACHIEVE SET-UP DIMENSIONS.

- 0A 00 LIST OF DOCUMENTS
- 0C 00 CONCEPT III HEADBOX (ELEV)
- 0D 00 CONCEPT III HEADBOX (SECTION)
- 0E 00 CONCEPT III HEADBOX (GAGE)
- 07 00 INDICATOR SLICE POSITION
- 70 01 INDICATOR SLICE POSITION LVDT
- 70 02 LIFT STOP SLICE
- 07 03 SIGHT GAGE DIFF. PRESSURE
- 07 04 VELOCITY PROBE MOUNTING
- 07 05 INDICATOR 1500 FPM HEAD
- 08 00 ELECTRO-POLISHING INSTRUCTIONS

THIS PRINT IS THE PROPERTY OF BELOIT CORPORATION. THE INFORMATION THEREON IS SUBMITTED IN CONFIDENCE.

ORDER NO. 85000	CUSTOMER NAME S.D. WARREN COMPANY	ARCH. NO. U
FILE NO. 611	MILL MUSKEGON, MICHIGAN	
DEPT. NO. 611	DATE 8-7-87	TITLE CONCEPT III HEADBOX (GAGE)
APP'D. 1 JBO	APP'D. 2 JBO	SCALE 1:10
SHEET OF		

BELOIT CORPORATION
IDENTIFICATION NUMBER
MA-1366-6-4-2

06-9900 IE 8-11-87