


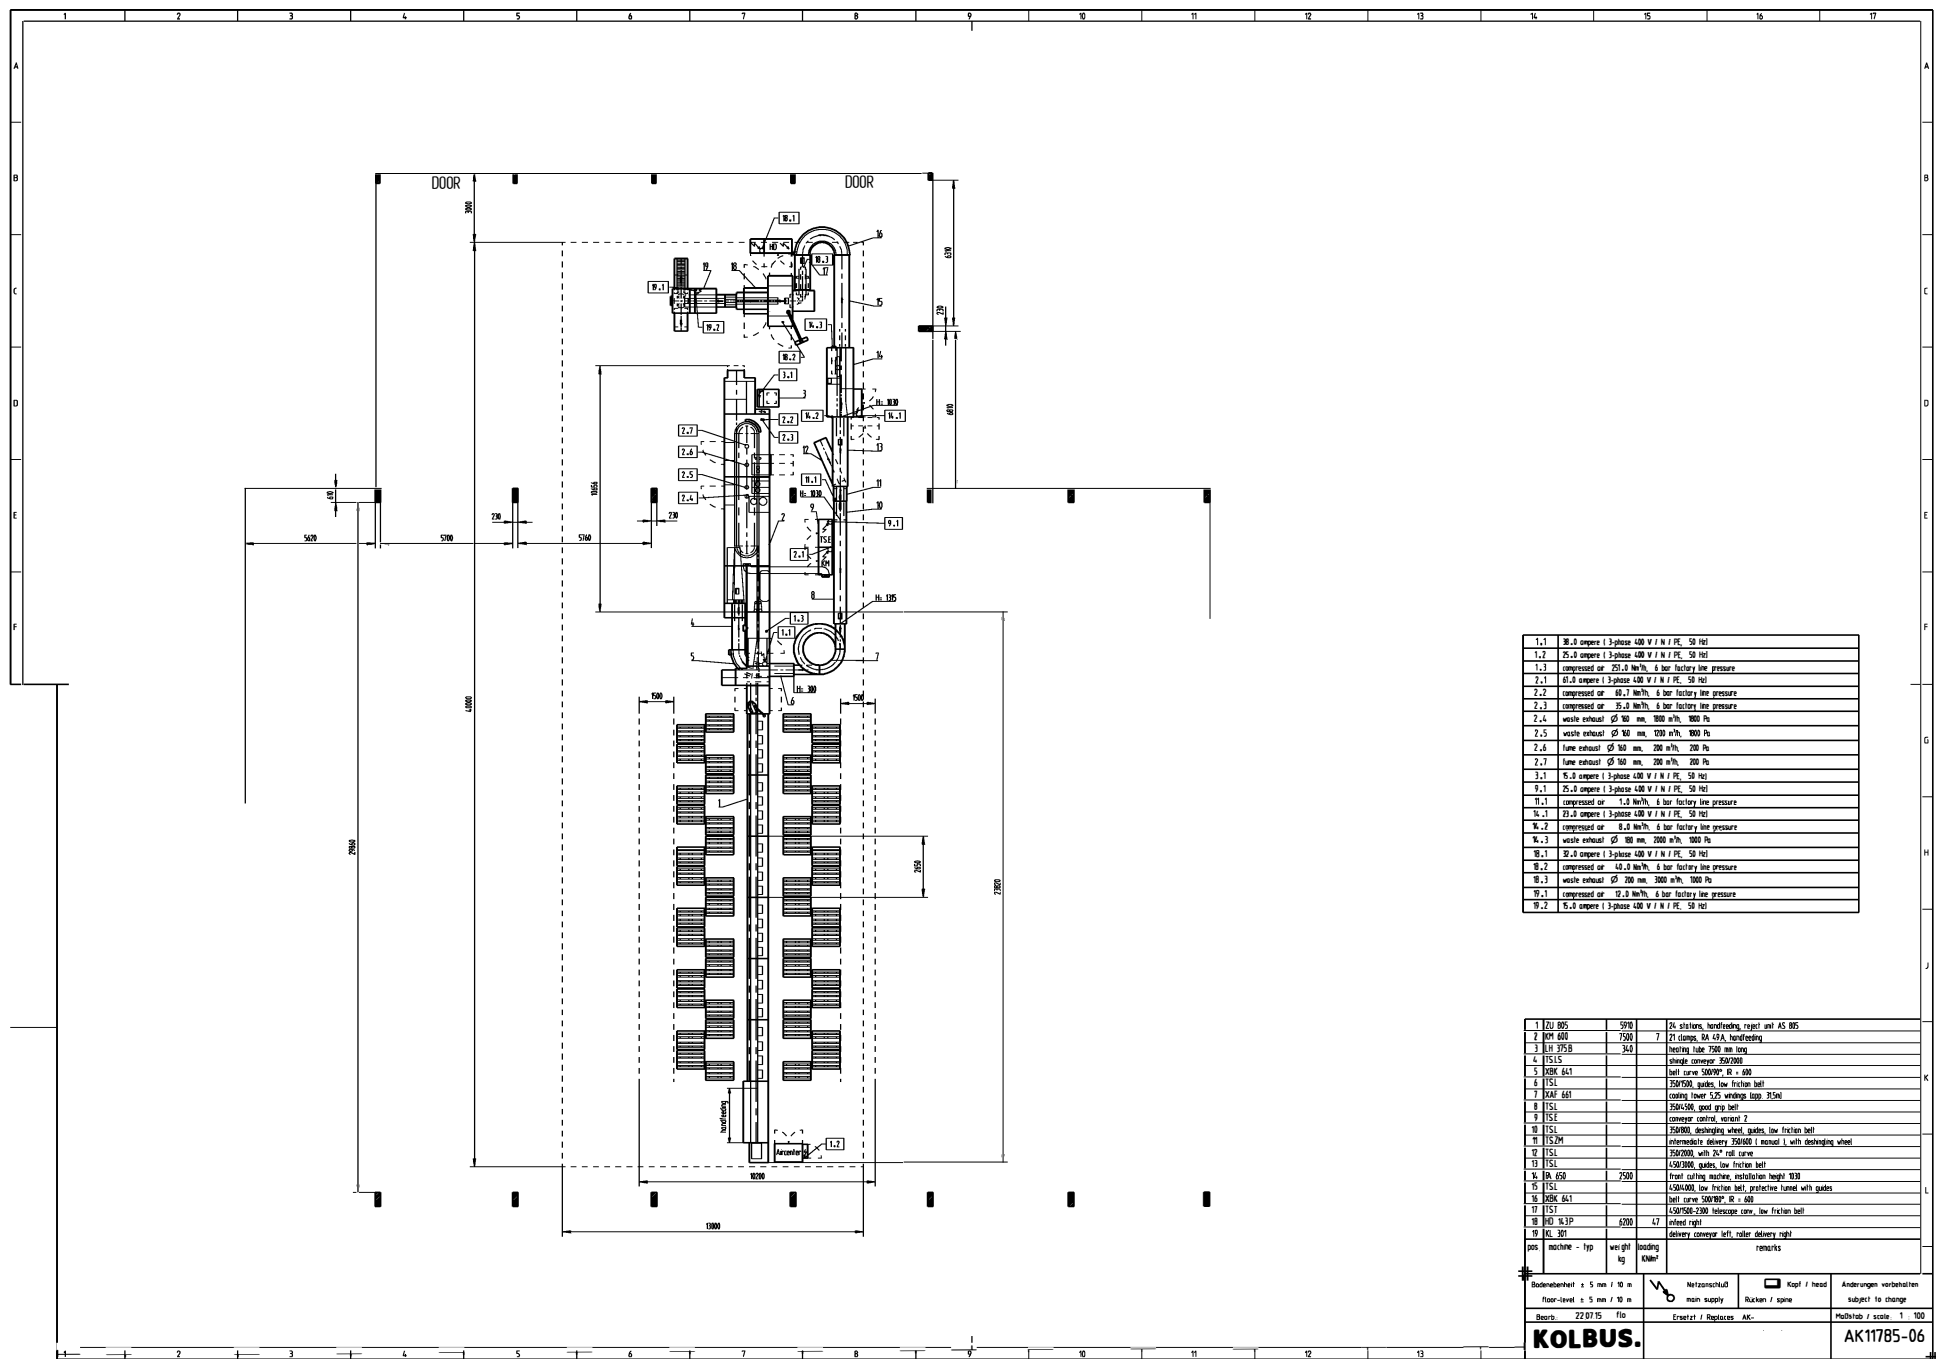

1.1	20.0 cmers / 1 phase 420 V / 1 P / 50 Hz
1.2	25.0 cmers / 1 phase 420 V / 1 P / 50 Hz
1.3	compressed air 253.0 Nm/h, 6 bar factory line pressure
2.1	40.0 cmers / 1 phase 420 V / 1 P / 50 Hz
2.2	compressed air 49.7 Nm/h, 6 bar factory line pressure
2.3	compressed air 75.0 Nm/h, 6 bar factory line pressure
2.4	weight exhaust $\varnothing$ 90 mm 300 m/s, 1000 Pa
2.5	weight exhaust $\varnothing$ 90 mm 1200 m/s, 8000 Pa
2.6	line exhaust $\varnothing$ 90 mm 200 m/s, 200 Pa
2.7	line exhaust $\varnothing$ 90 mm 200 m/s, 200 Pa
3.1	25.0 cmers / 1 phase 420 V / 1 P / 50 Hz
3.1	25.0 cmers / 1 phase 420 V / 1 P / 50 Hz
3.1	compressed air 7.0 Nm/h, 6 bar factory line pressure
3.2	25.0 cmers / 1 phase 420 V / 1 P / 50 Hz
3.2	compressed air 8.0 Nm/h, 6 bar factory line pressure
3.3	weight exhaust $\varnothing$ 90 mm 2000 m/s, 1000 Pa
3.4	20.0 cmers / 1 phase 420 V / 1 P / 50 Hz
3.2	compressed air 10.0 Nm/h, 6 bar factory line pressure
3.3	weight exhaust $\varnothing$ 90 mm 3000 m/s, 1000 Pa
3.1	compressed air 12.0 Nm/h, 6 bar factory line pressure
3.4	25.0 cmers / 1 phase 420 V / 1 P / 50 Hz

1	12 805	950	3	36 stations, handeling, report and MS 885	
2	100 000	500	7	21 clamps, 34 v-f-a handeling	
3	10 375,34	400	2	breeding tube 7500 nm long	
4	12 515			sheath connector, 50/7000	
5	1000 44,1			ball screw 50/200, 2 x 400	
6	1751			50/2000, gages, low friction ball	K
7	1000 661			control tower 57x wiring loop 31/50	
8	1751			750-100, steel ring ball	
9	1751			connector control, accept 2	
10	1751			50/800, desheating wheel, gages, low friction ball	
11	175 294			intermediate delivery 750/200 1 manual 1 with desheating wheel	
12	1751			50/2000, with 2nd rail screw	
13	1751			50/3000, gages, low friction ball	
14	10 450 650			brat crutch machine, installation helix 1030	
15	1000 44,1			50/4000, low friction ball, protective helix with gages	L
16	1000 44,1			ball screw 50/200, 2 x 400	
17	1751			50/2500-2500 telescopic cone, low friction ball	
18	100 10,3 P	6200	4,7	infused ring	
19	100 301			delivery conveyor belt, roller delivery belt	
20	machine - typ	weight kg	number	remarks	

Bodeneinheit ± 5 mm / 10 m floor-level ± 5 mm / 10 m	 Netzanschluß main supply	 Kapf / head Rücken / spine	Änderungen vorbehalten subject to change
Beart. Z20715 flo	Ersetzt / Replaces AK-		Maßstab / scale 1 : 100 AK11785-06