
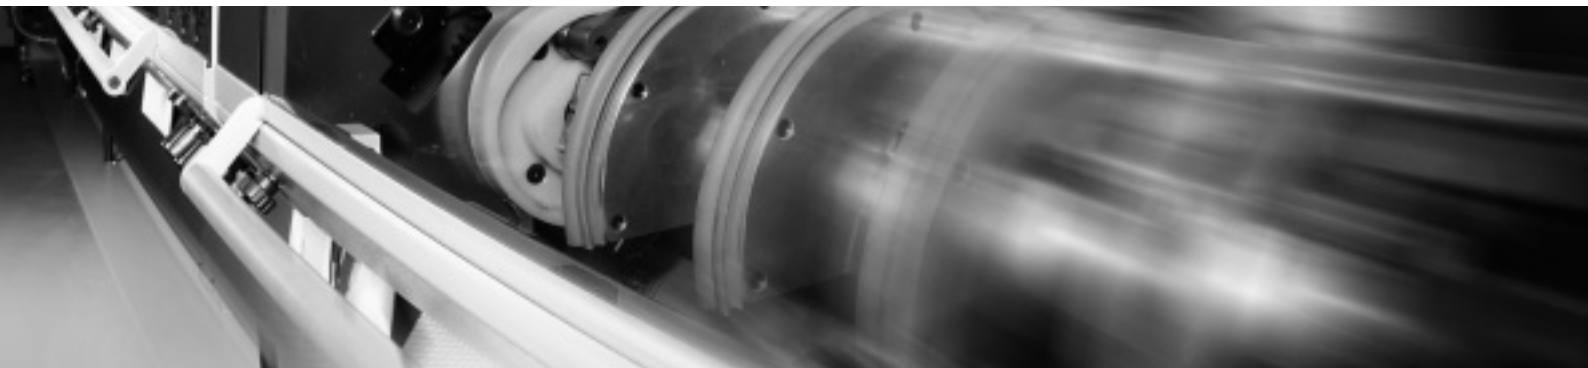





Saddle Stitcher **Primera C130 / Primera E130**

Technical Data



Mechanical speed	21" chain pitch	max. 13,000 cycles per hour			
Number of stations		max. 16 feeders			
Product sizes, untrimmed	Feeder		A		B
	high folio lap	max.	480 mm (18 7/8")	320 mm (12 5/8")	
		min.	90 mm (3 1/2")	80 mm (3 1/16")	
	low folio lap	max.	480 mm (18 7/8")	290 mm (11 7/16")	
		min.	90 mm (3 1/2")	80 mm (3 1/16")	
	without lap	max.	400 mm (15 11/16")	300 mm (11 13/16")	
	(suction opening)	min.	90 mm (3 1/2")	80 mm (3 1/16")	
	lap	max.	18 mm (11/16")		
		min.	6 mm (1/4")		
Signature size stitching		max.	480 mm (18 7/8")	320 mm (12 5/8")	
		min.	153 mm (6")	115 mm (4 1/2")	
	CD size		126 mm (5")	123 mm (4 7/8")	
Stitching heads	HK 75Q, HK 75VQ	max.	6 heads		
	HK 45Q	max.	8 heads		
	eyelet stitching head	max.	4 heads		
Cut-off	head/foot trim	max.	50 mm (2")		
	front trim	max.	50 mm (2")		(larger upon request)
Product thickness	standard	max.	13 mm (1/2")		
Center- and Trio cut	split cut	max.	6 mm (1/4")		
	punch cut	maximum product thickness = half knife width			


Design, specifications and measurements subject to change.

Product sizes, untrimmed		Three-knife trimmer 0449		A		B	
One-up 	standard	max.	480 mm	(18 7⁄8")	320 mm	(12 5⁄8")	
		min.	120 mm	(4 11⁄16")	115 mm	(4 1⁄2")	
Product sizes, trimmed 0449				A		B	
One-up 	standard	max.	475 mm	(18 11⁄16")	300 mm	(11 13⁄16")	
		with accessories	475 mm	(18 11⁄16")	315 mm	(12 7⁄16")	
	small size	min.	105 mm	(4 1⁄16")	75 mm	(3")	
		with accessories	105 mm	(4 1⁄16")	63 mm	(2 1⁄2")	
	stacker 0450	min.	148 mm	(5 13⁄16")	105 mm	(4 1⁄16")	
Center cut 	split cut	max.	237 mm	(9 1⁄3")	300 mm	(11 13⁄16")	
		with accessories	237 mm	(9 1⁄3")	305 mm	(12")	
		min.	95 mm	(3 11⁄16")	75 mm	(3")	
		with accessories	95 mm	(3 11⁄16")	63 mm	(2 1⁄2")	
	punch cut	max.	234 mm	(9 1⁄4")	300 mm	(11 13⁄16")	
		with accessories	234 mm	(9 1⁄4")	305 mm	(12")	
		min.	86 mm	(3 7⁄16")	75 mm	(3")	
		with accessories	86 mm	(3 7⁄16")	63 mm	(2 1⁄2")	
	Trio cut 	split cut	max.	153 mm	(6")	300 mm	(11 13⁄16")
			with accessories	153 mm	(6")	305 mm	(12")
			min.	90 mm	(3 1⁄2")	75 mm	(3")
			with accessories	90 mm	(3 1⁄2")	63 mm	(2 1⁄2")
punch cut		max.	153 mm	(6")	300 mm	(11 13⁄16")	
		with accessories	153 mm	(6")	305 mm	(12")	
		min.	90 mm	(3 1⁄2")	75 mm	(3")	
		with accessories	90 mm	(3 1⁄2")	63 mm	(2 1⁄2")	
Loading	bundle loader	min.	200 mm	(7 7⁄8")	100 mm	(3 7⁄8")	
	stream feeder	min.	140 mm	(5 1⁄2")	100 mm	(3 7⁄8")	
Folder feeder	1529/0554	max.	480 / 480 mm (18 7⁄8") / (18 7⁄8")		610 / 635 mm (24") / (25")		
		min.	90 mm	(3 1⁄2")	165 mm	(6 1⁄2")	
	1528/0553	max.	365 / 310 mm (14 3⁄8") / (12 1⁄4")		610 / 635 mm (24") / (25")		
		min.	90 mm	(3 1⁄2")	165 mm	(6 1⁄2")	
Merchandise tipper	0423	max.	210 mm	(8 5⁄16")	210 mm	(8 5⁄16")	
		min.	80 mm	(3 1⁄16")	55 mm	(2 1⁄4")	
Drive rating		11 kW: up to 16 feeders					
Power consumption		depending on project					
Pressure-vacuum pumps		depending on project					
Compressed air		6 bar (87 psi), provided by customer (depending on project)					

- 1 Flat pile feeder with Stream feeder
Universal 3738/0379*
- 2 Flat pile feeder with Stream feeder
Universal 3738 with extension 0379*
- 3 Flat pile feeder 0379*
- 4 Merchandise tipper 0423*
- 5 Folder feeder 0553*
- 6 Folder feeder 0554*

- 7 Gathering chain
- 8 Oblique sheet monitor
- 9 Master control console
- 10 Stitching machine 0383*, delivery to the rear or front
- 11 Three-knife trimmer 0449*
- 12 Compensating stacker Perfetto 0450*
- 13 Roller delivery, belt delivery, air table

* Primera E130 with Amrys

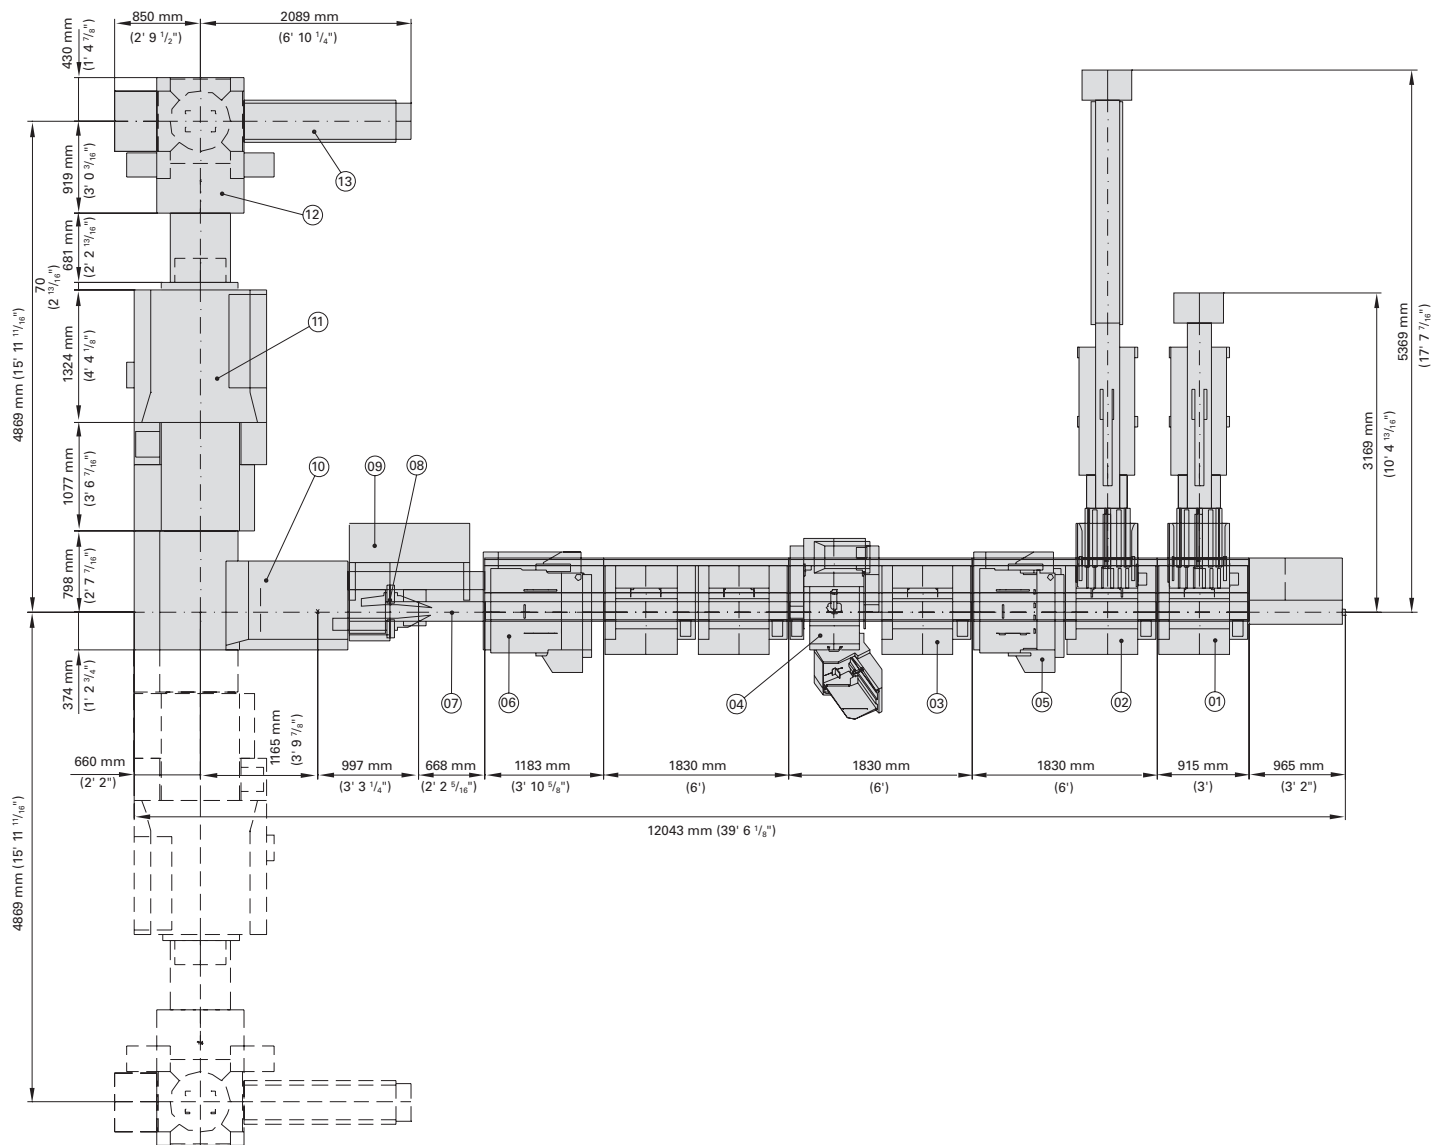

Müller Martini Marketing AG
Untere Brühlstrasse 13
CH-4800 Zofingen, Switzerland
Phone +41 (0)62 745 45 75
Fax +41 (0)62 751 55 50
info@mullermartini.com
www.mullermartini.com

