

CERTIFIED

VOITH SULZER

PAPER TECHNOLOGY

603 WEST ST.

MANSFIELD, MA 02048

PHONE: (508) 261-8800


FAX: (508) 261-8810

COMBISORTER

CERTIFICATION SHEET

I.D.	CUSTOMER: <u>CASCADES INC.</u> SIZE & TYPE: <u>12 COMBISORTER</u> ADDRESS (ORDER): <u>E. ANGUS, QUEBEC</u> CUST. DESIGNATION: _____ ADDRESS (INSTALL): <u>SAME</u> SERIAL NO. (S)*: <u>3709</u> CUST. ORDER NO.: <u>55175</u> VOITH SULZER JOB NO.: <u>1280-1</u> CUST. EQUIP. NO.: _____ ORDER DATE: <u>6/22/95</u> CONTROLS BY: <u>CUSTOMER</u> CONTROLS SERIAL NO.*: _____ CERTIFIED BY: <u>DENIS GAGNE</u> TITLE: <u>DESIGNER</u>
APPLICATION	INSTALLATION DWG: _____ UPPER BASKET DWG: <u>07.0860.80</u> LOWER BASKET DWG: <u>07.0878.10</u> STOCK TO BE HANDLED: <u>OCC</u> CONSISTENCY: <u>2.0</u> % FREENESS: _____ CSF THROUGHPUT: _____ BDSTPD _____ GPM pH VALUE: _____ STOCK TEMP _____ °F IMPURITIES IN STOCK: _____ SCREEN FED BY: _____ ACCEPTS DISCH. TO: _____ REJECTS DISCH. TO: _____ SCREEN PLATE PERF DIA: <u>.102</u> IN. <u>2.6</u> MM PLATE OPEN AREA: <u>26.6</u> % UPPER BASKET PERF DIA: <u>.094</u> IN. <u>2.4</u> MM UPPER BASKET OPEN AREA: <u>27.6</u> % LOWER BASKET PERF DIA: <u>.094</u> IN. <u>2.4</u> MM LOWER BASKET OPEN AREA: <u>26.6</u> % ROTOR SPEED: <u>488 RPM</u> UPPER ROTOR DWG: <u>D28-326005</u>
MATL	WETTED PARTS: CAST 316 WELDED 316L
DRIVE	DRIVE BY: <u>VOITH SULZER</u> POWERBAND NO: <u>(2) 3/5VX1800</u> C.D: <u>.50.70</u> MOTOR SHEAVE: <u>10.3</u> O.D. BORE: <u>3.375</u> KW: <u>.875 X .437</u> DRIVEN SHEAVE: <u>37.5</u> O.D. BORE: <u>M100 H7 MM</u> KW: <u>28 P9 MM X 6.00 MM</u>
MTR	MOTOR BY: <u>CUSTOMER</u> FRAME: <u>444T</u> HP: <u>125</u> RPM: <u>1800</u> VOLTS: _____ PHASE: <u>3</u> HERTZ: <u>60</u> MOTOR SHAFT DIA: <u>3.375</u>
OPT	FURNISHED ONLY IF MARKED: ☐ CONTROL PANEL PRESSURE GAUGES: ☐ PORT PLUGS ☐ LOCAL ☐ REMOTE
REMARKS	*ALWAYS SPECIFY UNIT SERIAL NO. WHEN ORDERING SPARE PARTS

MINIMAL HEIGHT REQUIRED FOR
UPPER HOUSING REMOVAL

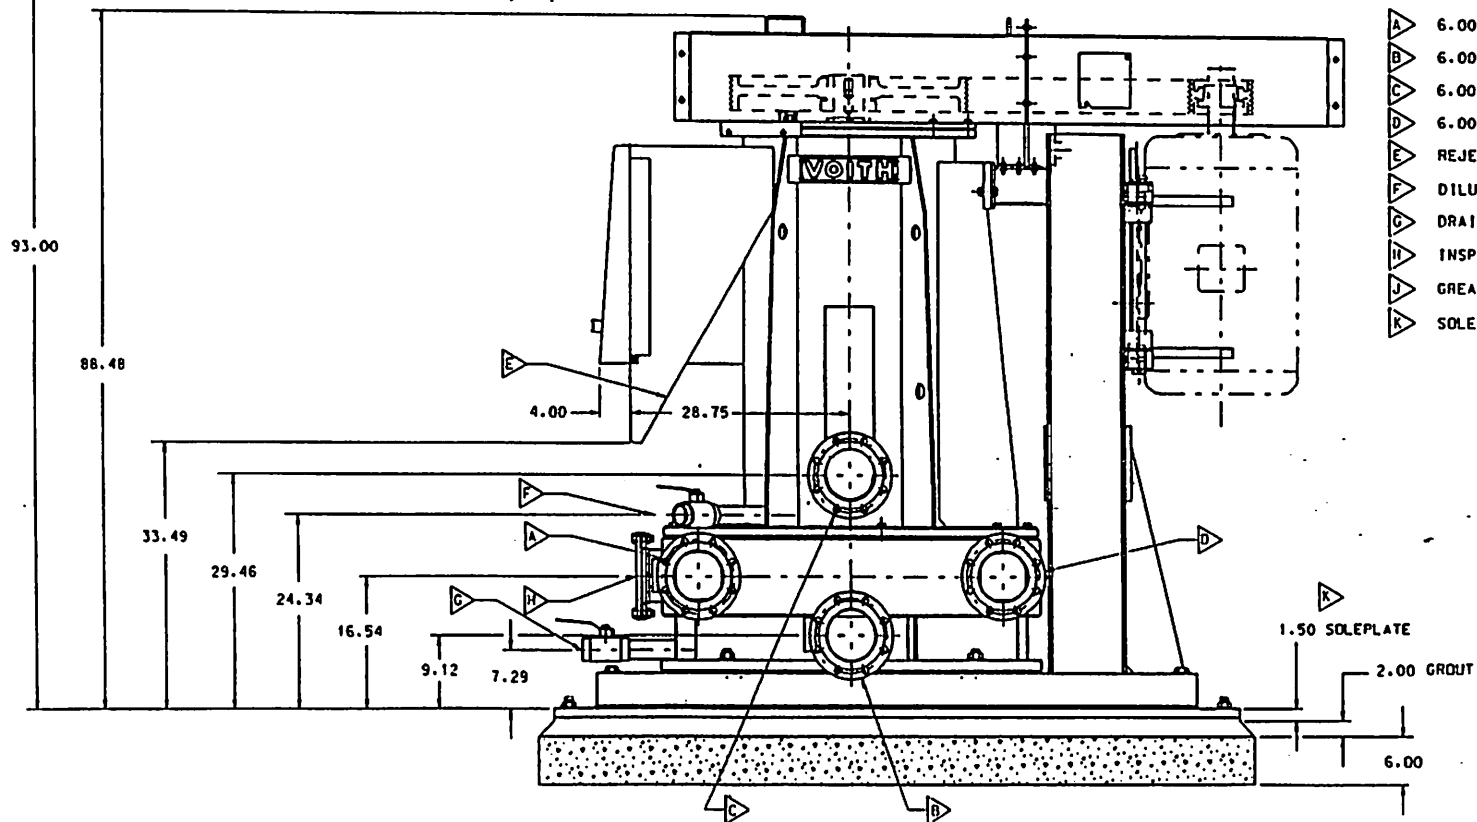

MACHINE WEIGHT: 7040 LBS EMPTY
8150 LBS FULL
ROTATING ASSEMBLY WEIGHT: 1100 LBS
UPPER HOUSING WEIGHT: 3000 LBS

TAMIS À TROUS SECONDAIRE

Combisorter :	Voith Sulzer
HP	125
RPM :	1 800
FRAME :	444 T
S.F. :	1,15
:	TEFC
DRIVE :	Courroies
POSITION :	VERTICAL SHAFT UP
	FOOT MOUNTING