



DF65C

Tracked pavers

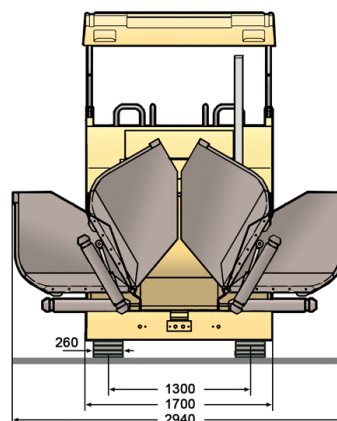

Technical data

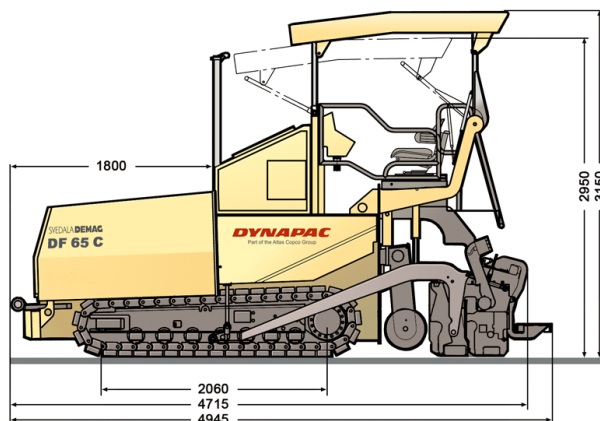

Dimensions	DF65C
Basic width	1.70 m
Working width, hydraulic extendable	3.40 m
Working width, maximum (incl. extension boxes)	4.40 m
Working width, minimum (with reducing shoe)	1.10 m
Masses	
Weight	9.60 t
Capacity	
Placement thickness (max)	270 mm
Theoretical placement capacity	300 t/ h
Traction	
Transport speed	3.80 km/ h
Working speed	0-32 m/ min
Undercarriage	
Crawler length	2,060 mm
Crawler width	260 mm
Final drive	Hydrostatical direct drives comprising planetary gear units and hydraulic oil motors, integrated in crawler track frame
Material hopper	
Capacity	10.10 t
Capacity	4.70 m ³
Dumping height, center	465 mm
Conveyor	
Conveyor type	Dual bar feeder
Conveyor width	350 mm
Conveyor control	Both sides independent
Auger	
Auger diameter	360 mm
Auger control	Prop. speed control by ultrasonic sensor Auger halves independent from each other. Reversible direction of rotation
Engine	
Manufacturer	Deutz
Type	TD 2011 L04
Rated power	71 hp
Rated power	52 kW
Emissions according to	EU 3A/ Tier 3

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.