



F121-6W/ D

Wheeled pavers

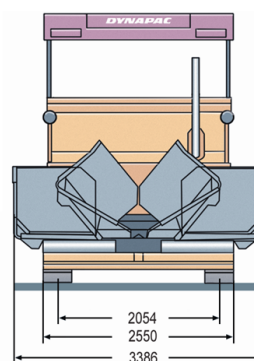

Technical data

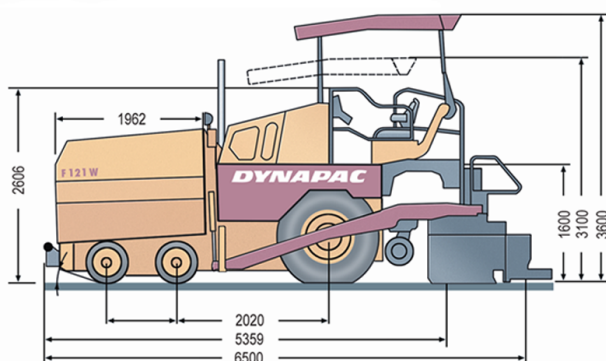

Dimensions		F121-6W/ D
Basic width		2.55 m
Working width, hydraulic extendable		5.10 m
Working width, maximum (incl. extension boxes)		7.30 m
Working width, minimum (with reducing shoe)		2 m
Capacity		
Placement thickness (max)		300 mm
Theoretical placement capacity		600 t/ h
Operation		
Operator console		Shiftable left/ right
Operator seat		Adjustable, comfortable, hydraulically sprung seat
Undercarriage		
Drive wheels		2 x 14.00R-25
Front wheels		560 / 100-410
Final drive		Hydrostatic, for all functions
Turning radius (inside)		2,800 mm
Material hopper		
Capacity		13 t
Capacity		5.90 m ³
Dumping height, center		520 mm
Dumping height, outside		520 mm
Hopper width, internal		3,386 mm
Conveyor		
Conveyor type		Dual bar feeder
Conveyor width		600 mm
Conveyor control		Proportional speed control, both sides independent
Auger		
Auger diameter		380 mm
Auger control		Proportional speed control. Left and right augers to be controlled separately. Reversible direction of rotation.
Engine		
Manufacturer		Deutz
Model		TCD2013L06V
Rated power		120 kW
Rated power		163 hp

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

f121_6w_d_pavers_en-20090414.105553.pdf 2009-04-14 10:55

Rated power @
Electrical system
Emissions according to

1,800 rpm
24V
EU3A / Tier 3

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

f121_6w_d_pavers_en-20090414.105553.pdf 2009-04-14 10:55