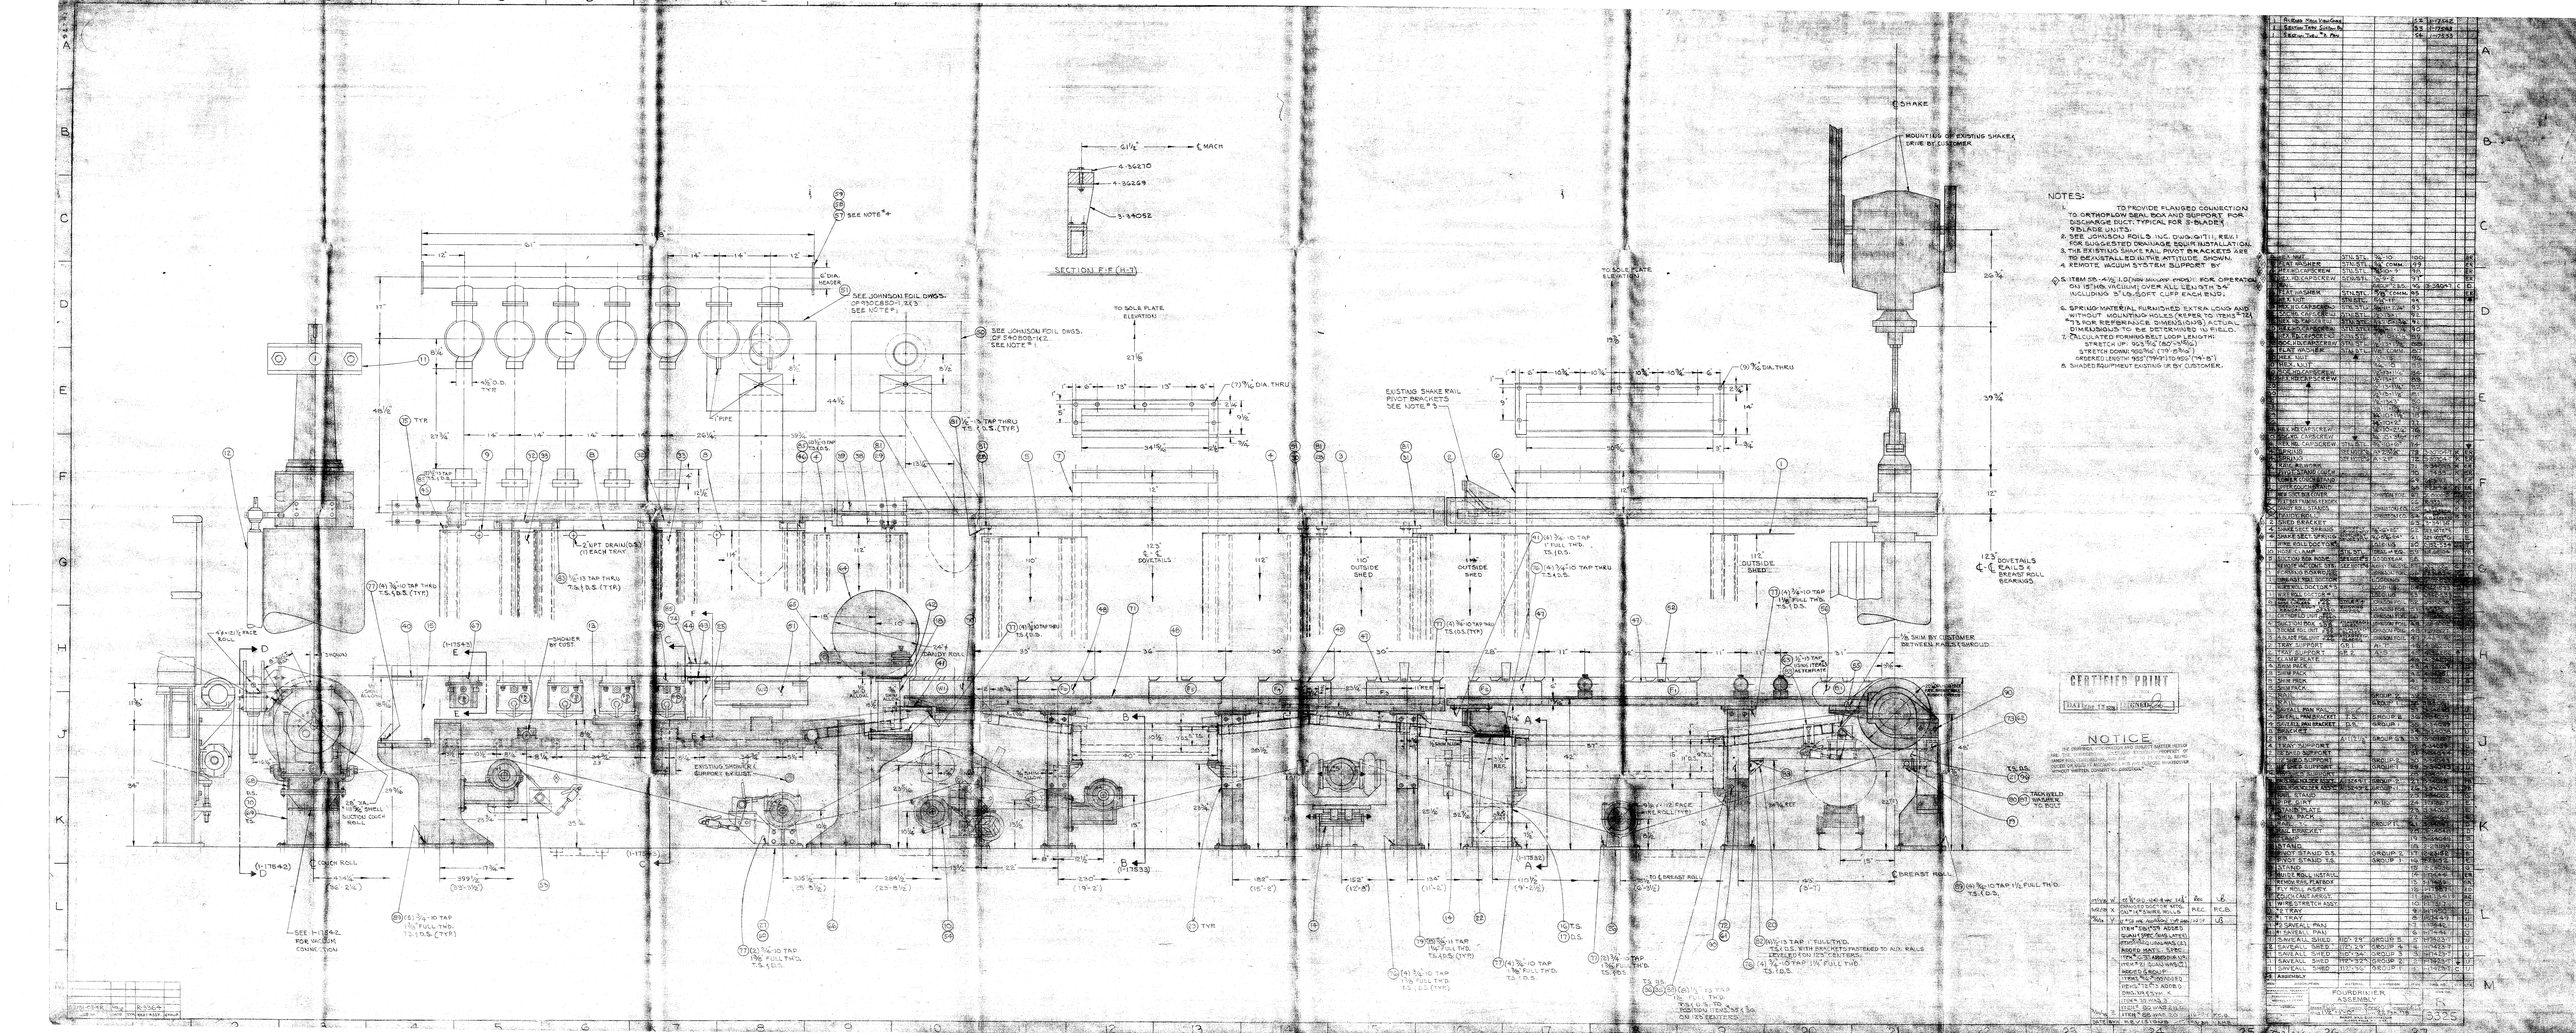
NOTES:
1. TO PROVIDE FLANGED CONNECTION TO ORTHOFLOW SEAL BOX AND SUPPORT FOR DISCHARGE DUCT. TYPICAL FOR 3-BLADE & 9BLADE UNITS.
2. SEE JOHNSON FOILS, INC. DWG. 9171, REV. 1 FOR SUGGESTED DRAINAGE EQUIP. INSTALLATION.
3. THE EXISTING SHAKE RAIL PIVOT BRACKETS ARE TO BE INSTALLED IN THE ATTITUDE SHOWN.
4. REMOTE VACUUM SYSTEM SUPPORT BY
5. ITEM 55 - 4½" I.D. DOWN MOUNT HOSES FOR OPERATION ON 15" HG. VACUUM) OVER ALL LENGTH 34'
INCLUDING 5'-0" SOFT CUFF EACH END.
6. SPECIFIC MATERIAL FURNISHED EXTRA LONG AND WITHOUT MOUNTING HOLES (REFER TO ITEMS 7 & 13 FOR REFERENCE DIMENSIONS) ACTUAL DIMENSIONS TO BE DETERMINED IN FIELD.
7. CALCULATED FORMED BELT LOOP LENGTH:
STRETCH UP: 903 9/16" (80'-3 9/16")
STRETCH DOWN: 902 7/16" (79'-10 7/16")
ORDERED LENGTH: 903" (79'-11") TO 902" (79'-10")
8. SHADED EQUIPMENT EXISTING OR BY CUSTOMER.
SECTION E-E (H-3)
SECTION F-F (H-3)
SECTION A-A (H-3)
SECTION B-B (H-3)
SECTION C-C (H-3)
SECTION D-D (H-3)
EXISTING SHAKE RAIL PIVOT BRACKETS SEE NOTE # 5
MOUNTING OF EXISTING SHAKER DRIVE BY CUSTOMER
SHAKE
BREAST ROLL
COUCH ROLL
TYR
SHOWER BY CUST.
EXISTING SHOWER & SUPPORT BY CUST.
SEE I-11842 FOR VACUUM CONNECTION
2 FT. DRAIN (TYP.) (1 EACH TRAY)
DOVETAILS
TO SOLE PLATE ELEVATION
CERTIFIED PRINT
NOTICE
THE DRAWINGS, SPECIFICATIONS AND DIGITAL MATTER HEREOF ARE THE PROPERTY OF JOHNSON FOILS, INC. AND SHALL NOT BE USED FOR ANY PURPOSE WHATSOEVER, NOR BE LOANED, COPIED OR DISCLOSED TO ANY UNAUTHORIZED PERSON WITHOUT WRITTEN CONSENT OF JOHNSON FOILS, INC.
FOURDRINIER ASSEMBLY
3335