




AM MANUFACTURING COMPANY

BENCH TOP KNIFE DIVIDER/FORMER MODEL RK3300

SINGLE BANK BAGEL DIVIDER AND FORMER

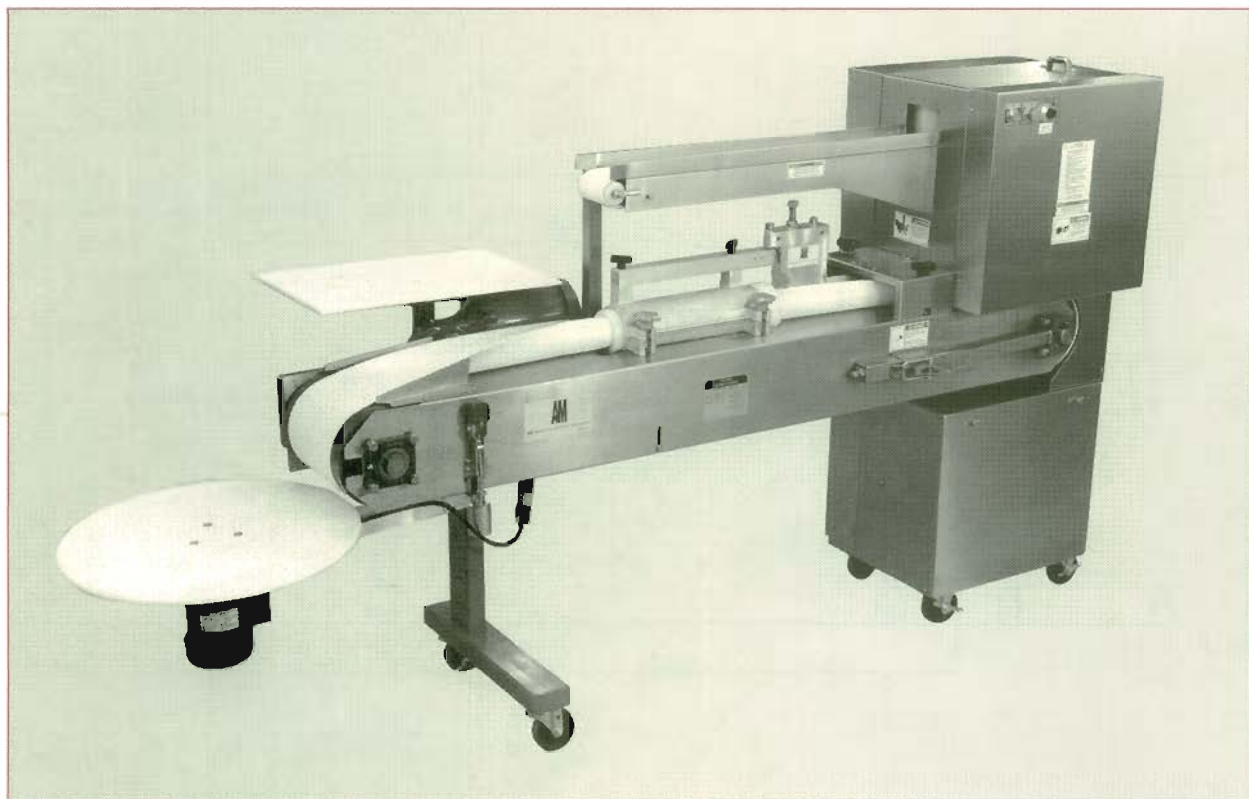

©1997

In its latest effort to provide the Baking Industry with the latest technology, AM Manufacturing is proud to announce the **RK-3300 BENCH TOP KNIFE DIVIDER AND FORMER**. The RK3300 includes the same outstanding features of the RK2200-II in a compact machine which will integrate into the limited floor space of the smaller bakery. With a full scaling range of 2-7 ounces, this unit will divide and form 250 dozen bagels per hour. Backed by over 30 years of experience, and AM Manufacturing's commitment to customer satisfaction, the RK3300 is a sure winner!

FEATURES

DIVIDER

- Large 4 1/2" / 11 25 cm wide feed conveyor
- Gentle knife cutting action, stainless steel knife
- Precision lockable (solid state) speed controls
- Easy clean-up and maintenance
- Simple weight adjustments
- Made in the U.S.A.
- Can produce mini to bull bagels and breakaways(patented)
- No heat transfer to dough
- Uses no divider oil or piston action
- Parts and service readily available

FORMER (STANDARD EQUIPMENT)

- QUICK CHANGE™ belts and forming tubes
- Self cleaning belt scraper
- Simple yet rugged design
- Stationary board table
- Easy belt adjustment
- Cantilevered leg design for quick belt changes
- Mounted on smooth rolling casters



AM MANUFACTURING COMPANY


APEX BAKERY EQUIPMENT CO. INC.
9900 Stirling Road, Suite 228
Hollywood, FL 33024
Toll Free In USA 888-571-3599
Outside USA 732-681-9496
Fax 954-364-6268
www.apex-equip.com



AM MANUFACTURING COMPANY

BENCH TOP KNIFE DIVIDER/FORMER MODEL RK3300

SINGLE BANK BAGEL DIVIDER AND FORMER

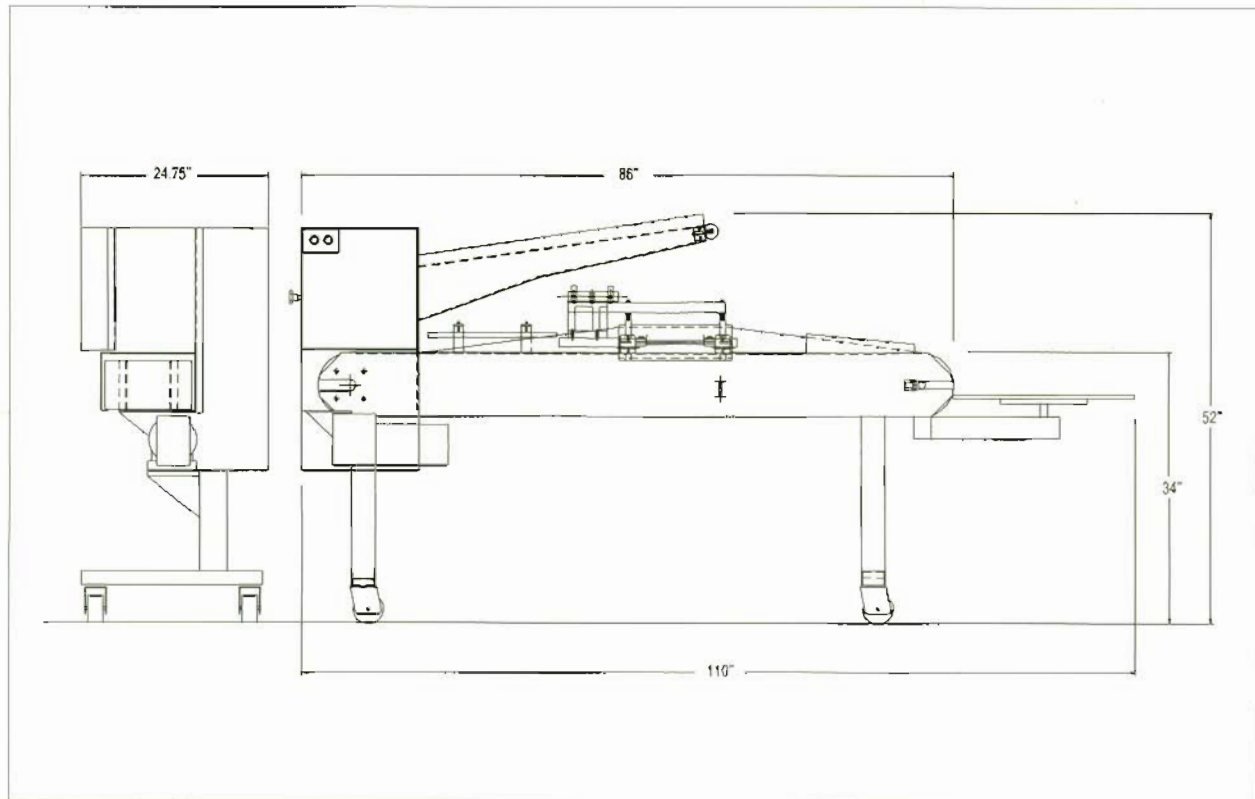

SPECIFICATIONS

- Production rate 3000 pieces per hour
- Scaling Rate 2-7 ounces
- Height 57"/144cm
- Length 89"/226cm
- Width 24 3/4"/61 7/8cm
- Infeed conveyor length 48"/121cm
- Infeed conveyor height 52"/135cm
- Optional rotary table 24"/60cm
- Stationary board table 16"x23"/40cmx58cm
- Construction materials 300 series stainless steel and FDA approved plastic

ELECTRICAL REQUIREMENTS

- 220 volt / 3 phase
- 220 volt / single

