Typical Drop Ceiling Install
Galaxy Gen 3 Dual 4-Pod Light

Ceiling

30" Standard Arm Length
18", 24", 36" & 42" Available

Unlimited Joint Rotation

Side View

Unlimited Joint Rotation

15° = 8" Travel

45° = 21" Travel

30"

Top View

See Control Pad Detail

8-3/4" Head Diameter

1-7/8" Head Thickness

Removable Aluminum Handle
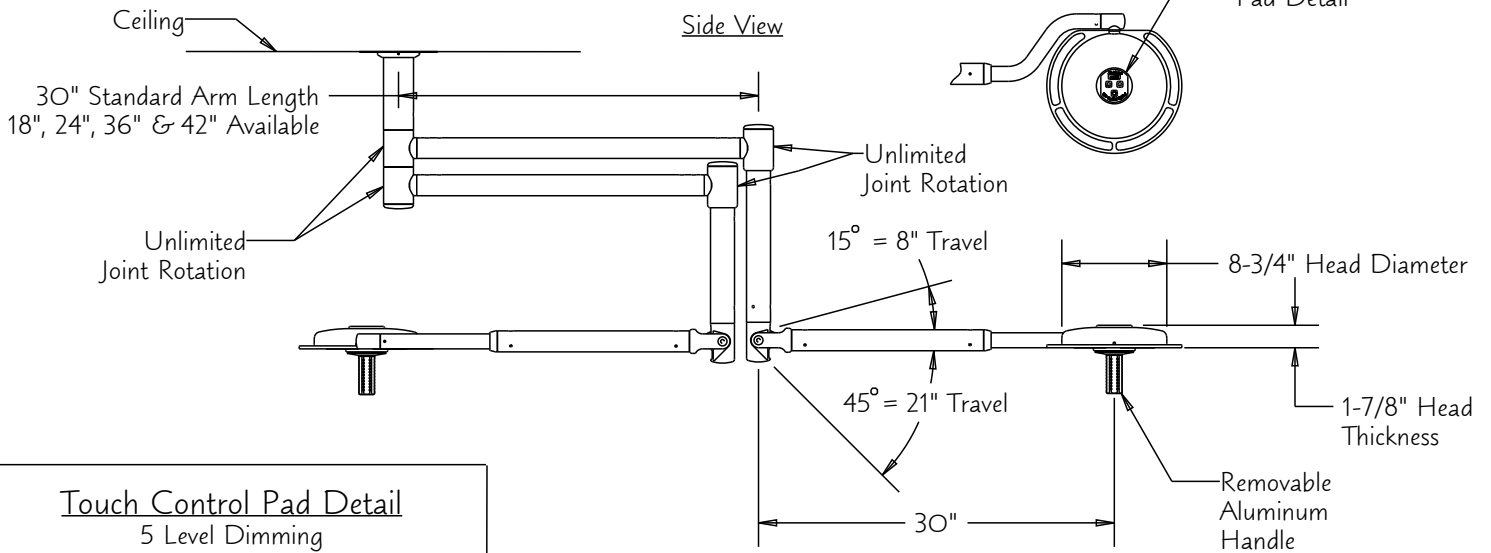
Touch Control Pad Detail
5 Level Dimming

Level Indicator

Dimming Control

Power

StarTrol.com

LED Medical Lighting

Bottom View

700° Joint Rotation

330° Joint Rotation
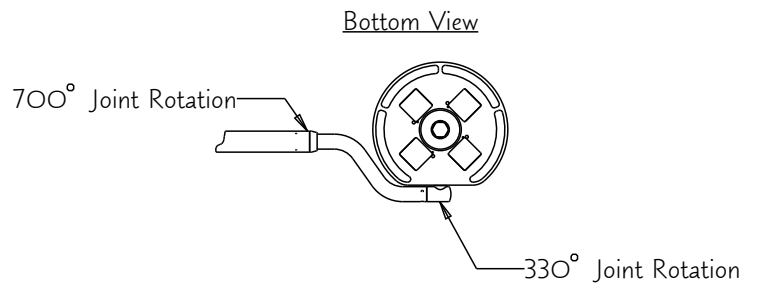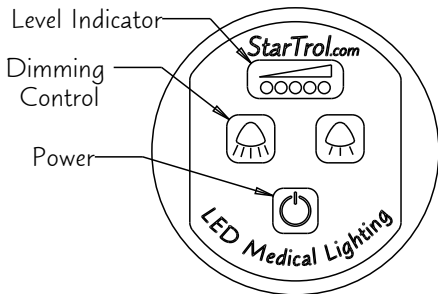
Galaxy Gen3 Dual 4-Pod Specifications	
Model Number	4x4-GS2
Input Voltage	100-240 VAC
Input Current	0.67 Amps @ 120 VAC
Input Wattage	80 Watts
Light Output per Head	70,000 Lux @ 1 Meter
Total Light Output	140,000 Lux @ 1 Meter
Moment Load	130 ft-lbs
Max Weight	74 Lbs.
Min. Ceiling Hgt.	96" @ 80" Pivot Hgt
Max. Ceiling Hgt.	148" @ 80" Pivot Hgt

Notes:
1. Customer is responsible for consulting with structural engineer to determine design of support structure.
2. Electrical connections to be completed by licensed electrical contractor in compliance with all local codes.
3. Ceiling Box can also be mounted at finished ceiling height with additional ceiling cover.

Mounting Info

Top View

5-1/4" Typ.

2-5/8" Typ.

1/4" Slot Typical

2-1/4"

9"

Ø 17/32"

1/2" Knock Out for Incoming Power

9"

Side View

10-3/4"

6" Min., 9" Reccomended Space Above Ceiling

Front View

10-3/4"

3"

Electrical Connection Terminal Block

Ceiling Tile

Trim Ring