


3.6 Technical Specifications

3.6.1 Dimensions

Figure 3-3: Dimensions

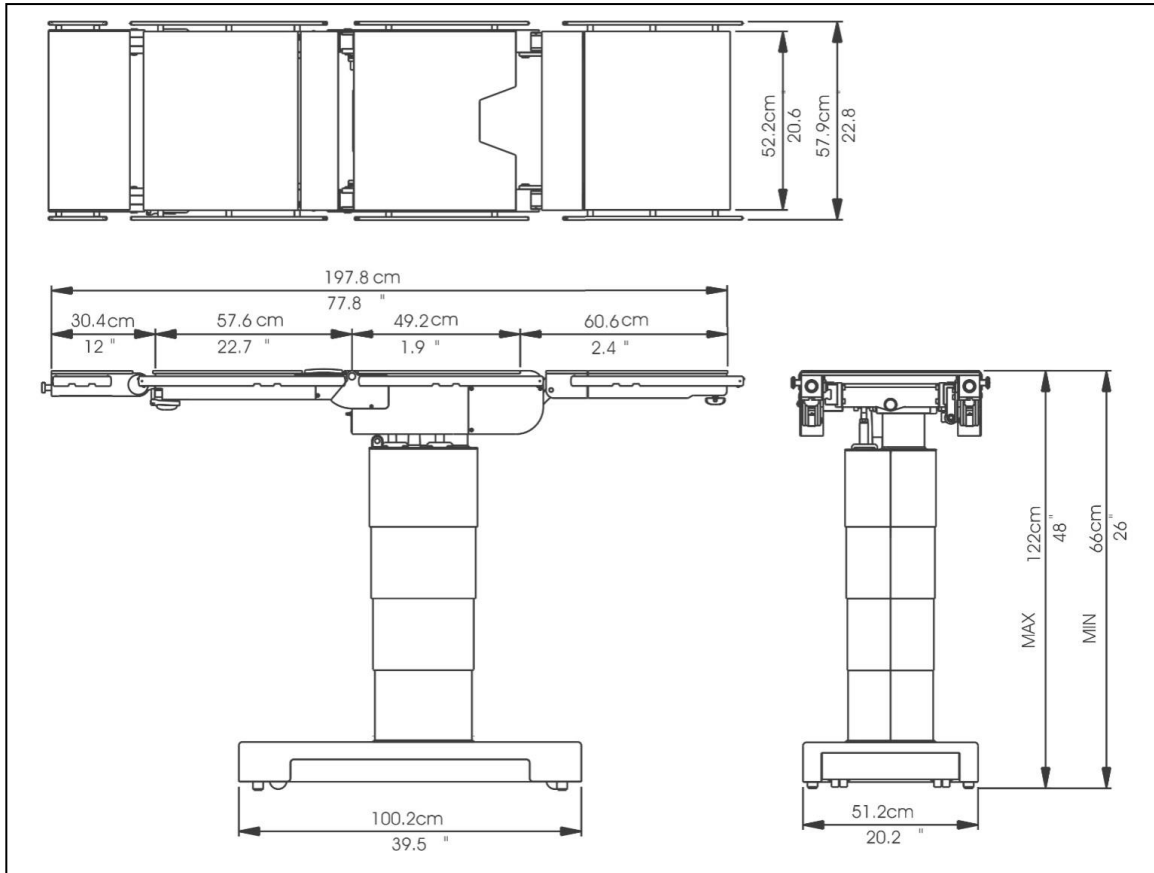

3.6.2 Weight (without package, pads and accessories):

Model No.	B2AV1000	B2AV1000K	B2AV1000S	B2AV1000SK	B2AV1000SKP
Weight lb (kg)	440 (200)	451 (205)	491 (223)	501 (228)	491 (223)

3.6.3 Battery Capacity:


Main Battery Set: 24V, 14 Ah (Battery Specification: 12V/14Ah*2, per each table)

Sub Battery Set: 24V, 2.3 Ah (Battery Specification: 12V/2.3Ah*2, for B2AV1000SKP only)

Optional C-LiFePO4 Battery Pack: 17.4 Ah (Battery Specification: 24V/17.4Ah*1, per table)

3.6.4 Imaging Coverage


Figure 3-4-1: Models B2AV1000/B2AV1000K

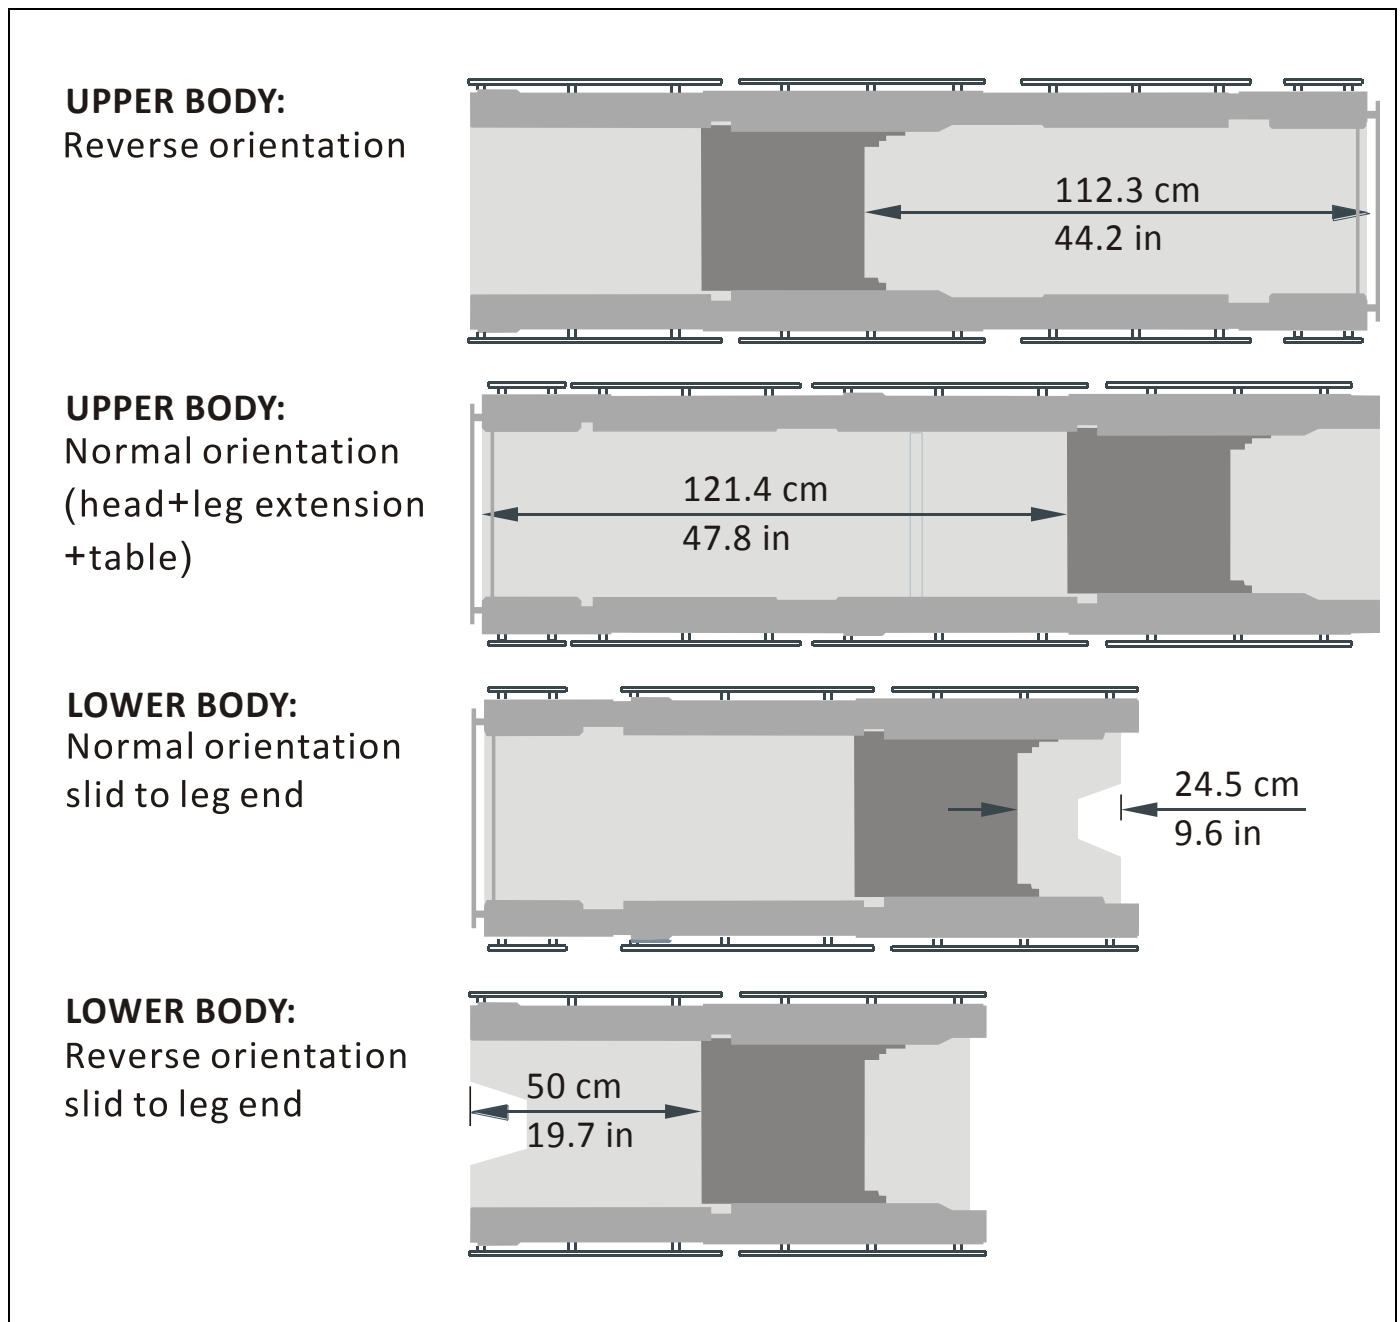

Note: The imaging coverage is 14 inches wide.

Remarque: La couverture d'imagerie est de 35.5 cm (14 po) de large

Figure 3-4-2: Models B2AV1000S/ B2AV1000SK/ B2AV1000SKP

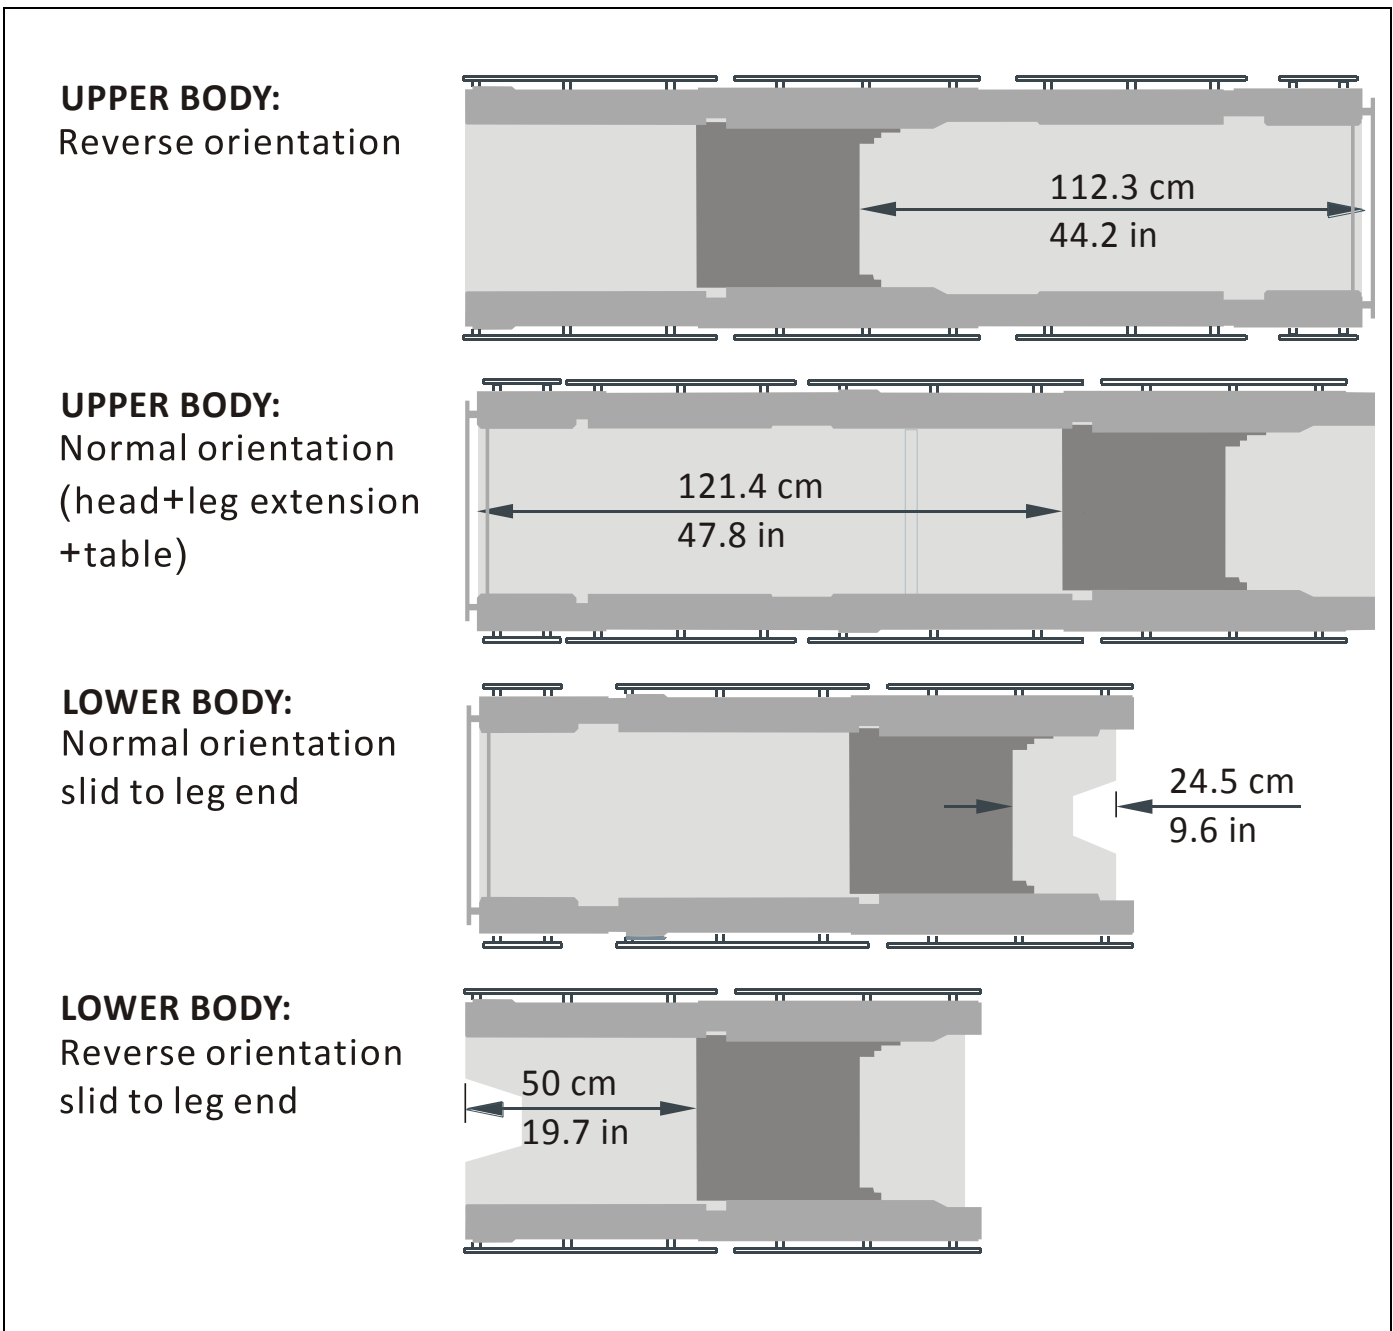

Note: The imaging coverage is 14 inches wide.

Remarque: La couverture d'imagerie est de 35.5 cm (14 po) de large.