

Machine Ref: E1-FSM06
Description: Cone to cone winding machine (New)
Manufacturer: Milhan Makina (Turkish)
Size: 2 to 6 Spindles
Year: New

*** This is a new machine manufactured to customers own specification ***

More pictures: [Click Here](#)

Video: [Click here](#)

Technical Specification:


- Configuration: Single Sided with easily accessible electrical cabinet
- Composition: 2-6 spindles each with creel shelf to hold input cone
- Input Yarn Creel: 1 per spindle (Creel shelf)
- Drive: 1 independent motor per spindle
- Winding Motor: For each spindle 2800 rpm/0.08Kw/380V /0.22A/50Hz
- Traverse: 95 diameter rubber driven Bakalite
- Drum movement: Directly driven from motor shaft
- Winding Length: Optional length 6" - 8" - 10" Inch
- Winding Diameter: Maximum 320mm
- Take-up cone: Conical or Parallel
- Anti patterning system: Electronically adjusted
- Waxing device: 1 for each spindle
- Slub catcher: 1 mechanically adjustable scissor system for each spindle
- Package stop: Stops automatically when the cone reaches the requested meterage
- Start / Stop: For each spindle on the meter counter – start stop button system
- Cone density: Adjusted mechanically by special shock absorber system
- For each spindle - Adjustable mechanical metal scale weight system
- Yarn sensor: An optical sensor for each spindle
- Winding cycle control: Inverter speed control supported for 6 spindles
- Inverter: 1 inverter speed control
- Winding speed: Maximum 1000m/min
- Winding speed control: Adjustable by digital speed setting unit

Optional Extra: Electronic Measured length control on each spindle

Dimensions of a 6 spindle machine: 2.32m x 80cm x 180 cm (LWH)

Additional Information:

Status: This is a new machine manufactured to customers specification
Condition: Excellent (with 1 year warranty against manufacturers defects)
Delivery: 4 weeks after order confirmation

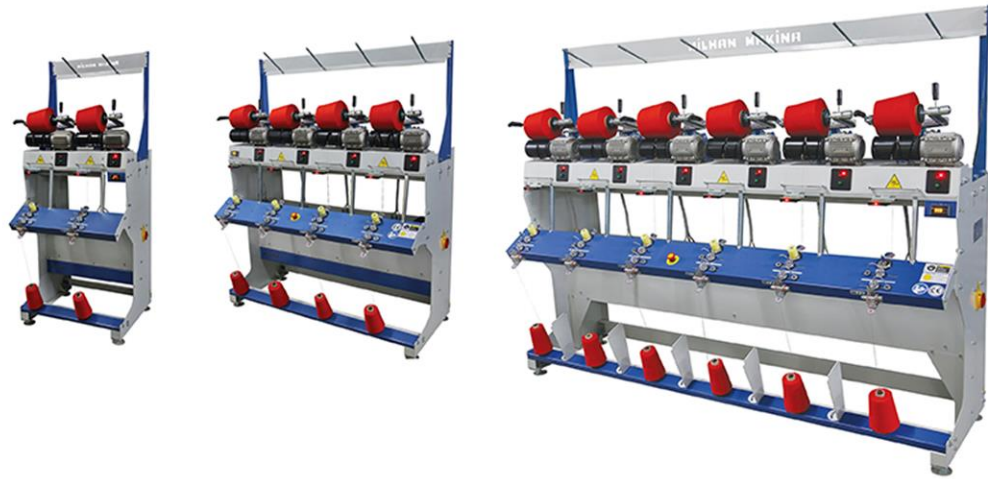

More pictures are available on request.