

(2) PTE 08 DRIVES - MOTOR 15 H.P. 3/60/460 V

1750 RPM - CLASS I - GROUP D - DN 2 - TEFC - CHEMICAL

PLANT TYPE. ϕ BORG WARNER non-metallic mechanical

SEAL W/ GELB LUBRICATOR TYPE III




8 Anneaux AL 16 - N° 2758

pour manutention en cours d'émaillage.

DO NOT USE THESE LUGS FOR

LIFTING OF TANK AFTER ASSEMBLY.

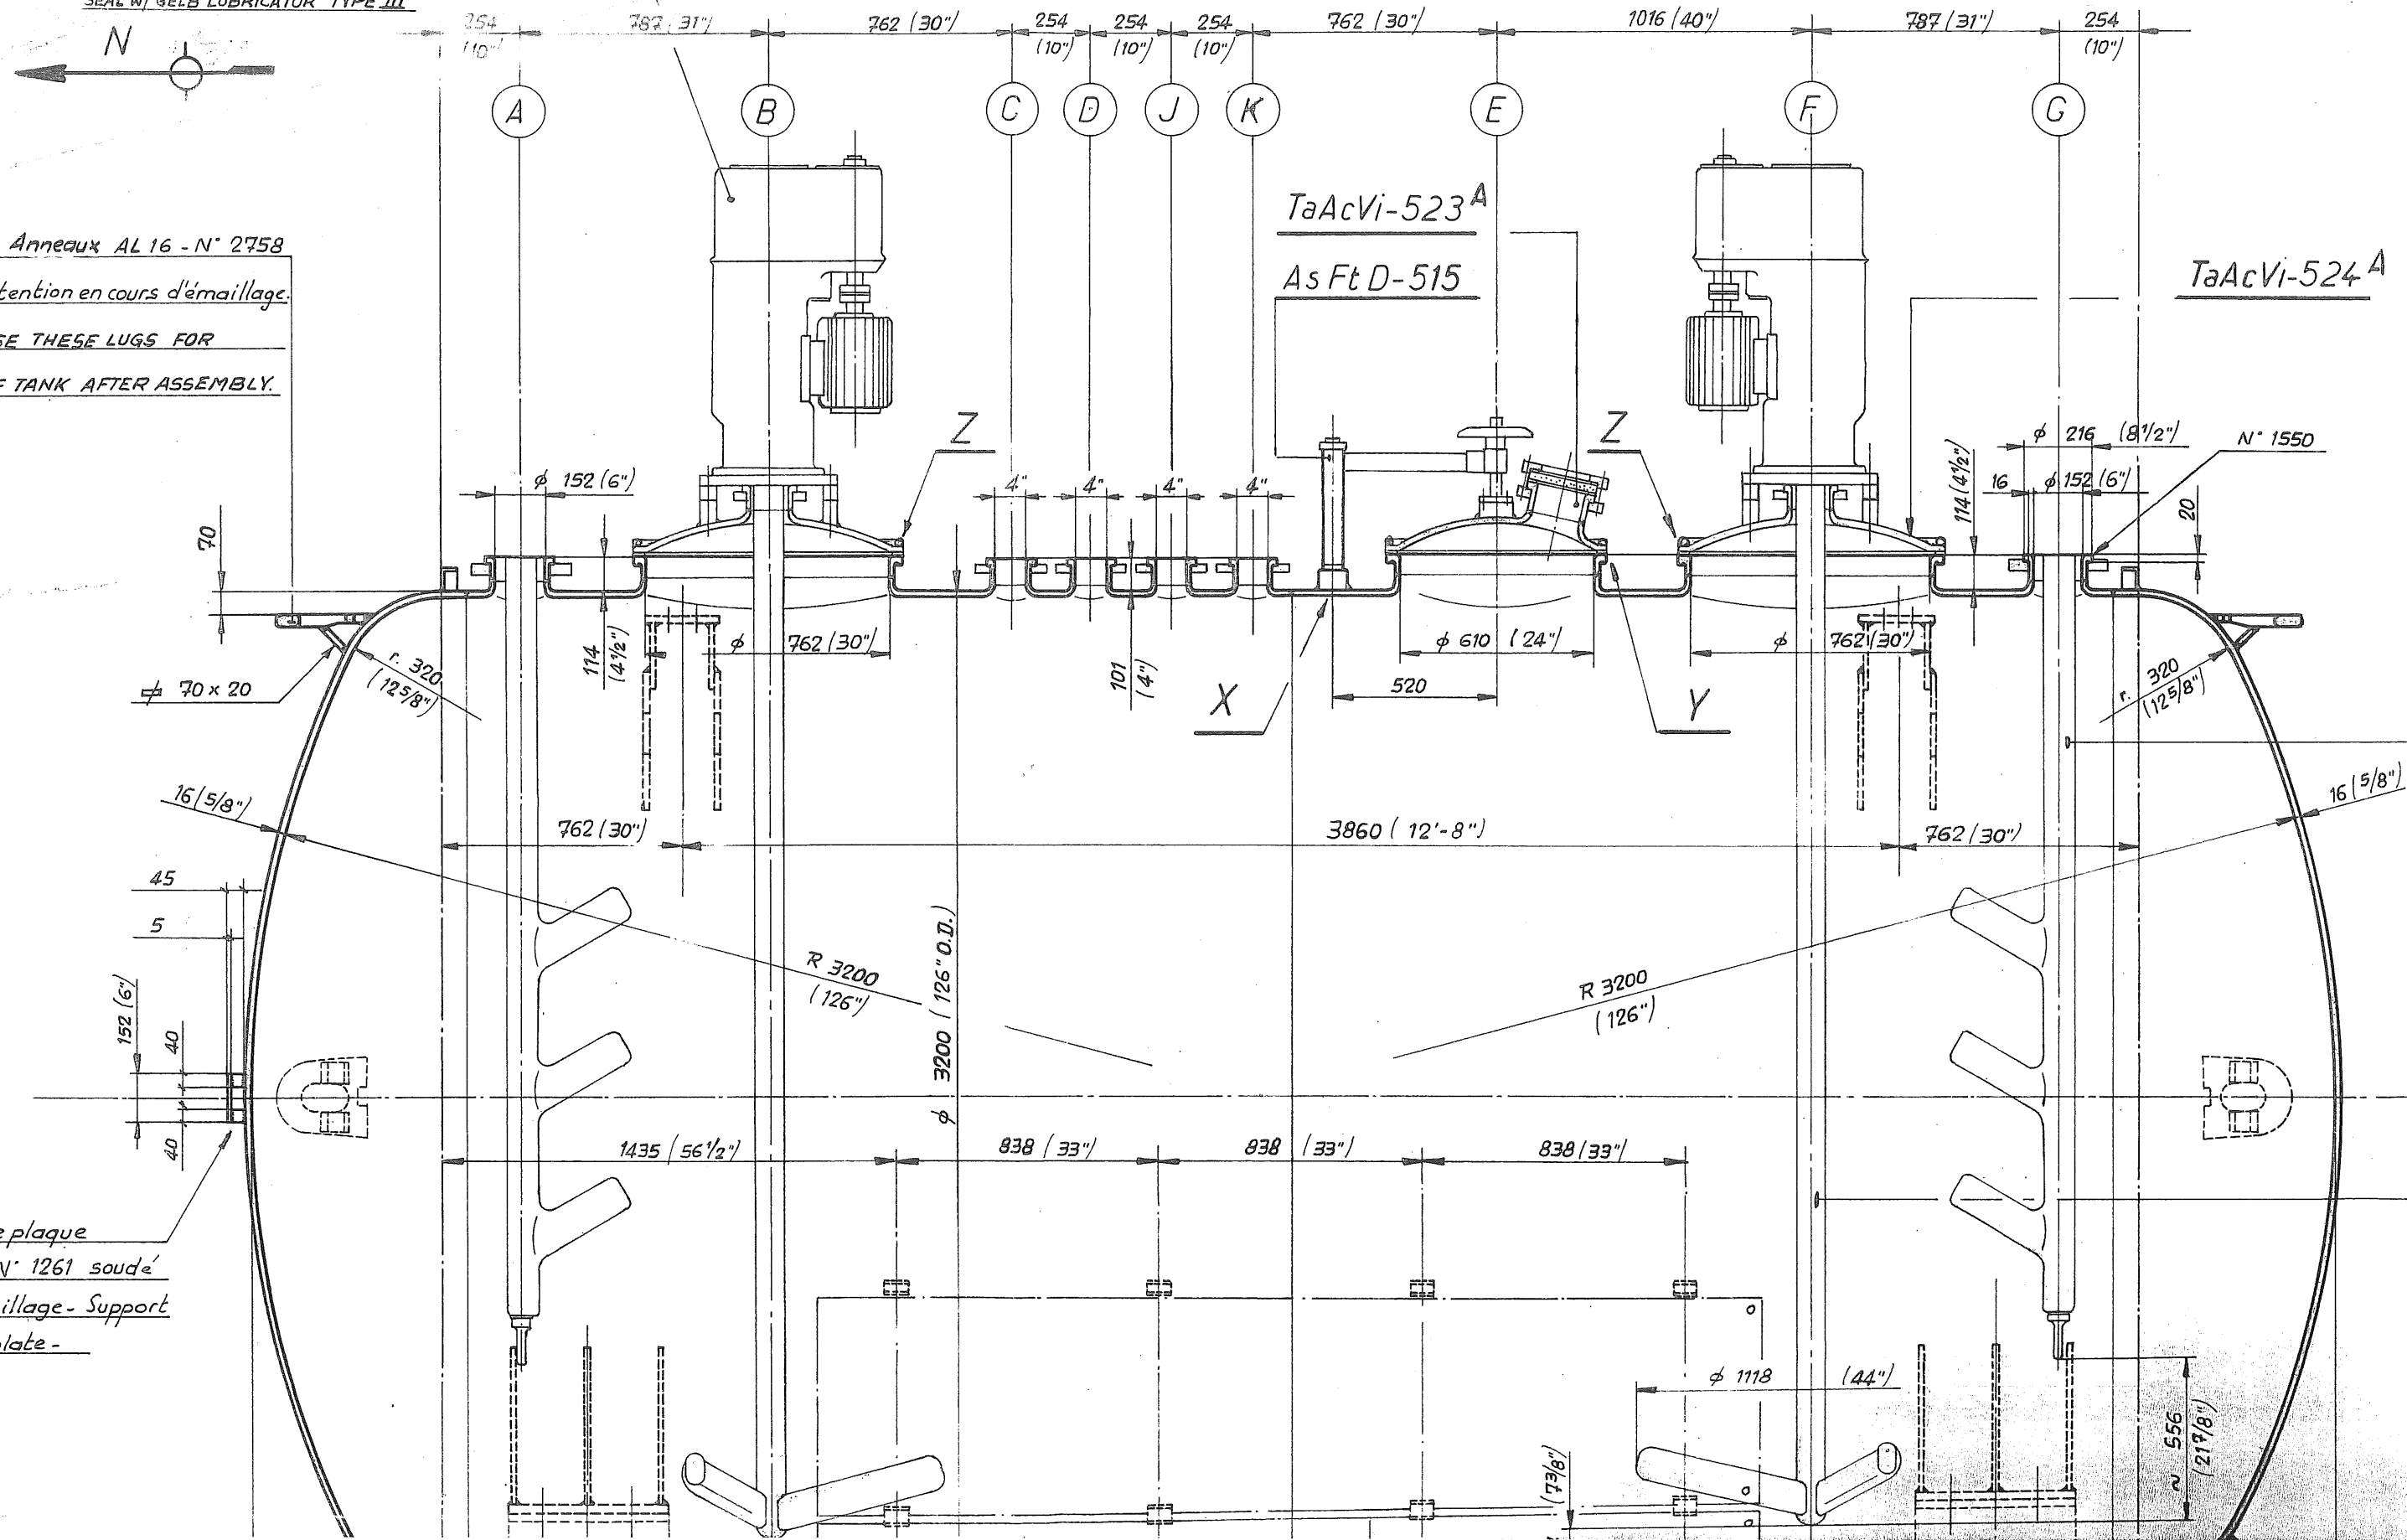

Support de plaque
d'adresse N° 1261 soudé
après émaillage - Support
for nameplate -

TaAcVi-523^A
As Ft D-515

TaAcVi-524^A

N° 1550

R 3200
(126")

R 3200
(126")

ϕ 1118 (44")

\approx 556
(21 7/8")