DWG NO 0-15160 SH 1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	05APR00	

NOTES:

1 ALL TYPE T-304 STAINLESS STEEL, GLASSBEAD BLASTED SATIN FINISH.

⚠2 ELECTRICAL REQUIREMENTS: DRIVE 30 HP, 460 V, 3 PH, 60 HZ

⚠3 AIR SUPPLY: 90 TO 150 PSI, MINIMUM USEAGE TO OPERATE DOORS.

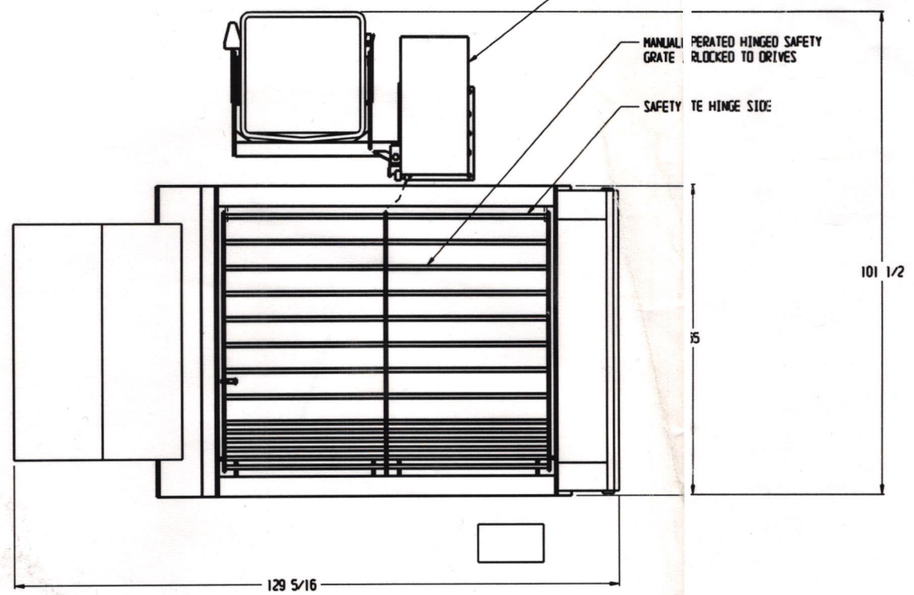

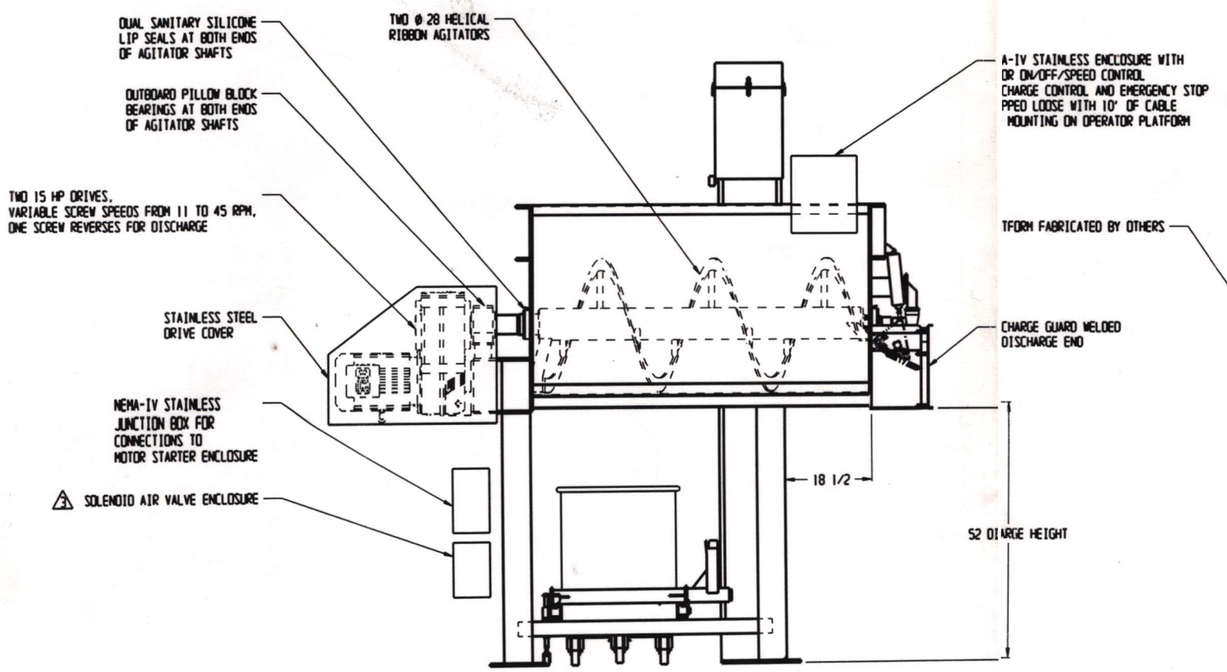

⚠2 NEMA-IV STAINLESS ENCLOSURE WITH VARIABLE FREQUENCY SPEED CONTROLLERS, MOTOR STARTERS, FUSES, CONTACTS, SHIPPED LOOSE, TO BE INTERCONNECTED TO JUNCTION BOX ON MIXER, BY CUSTOMER

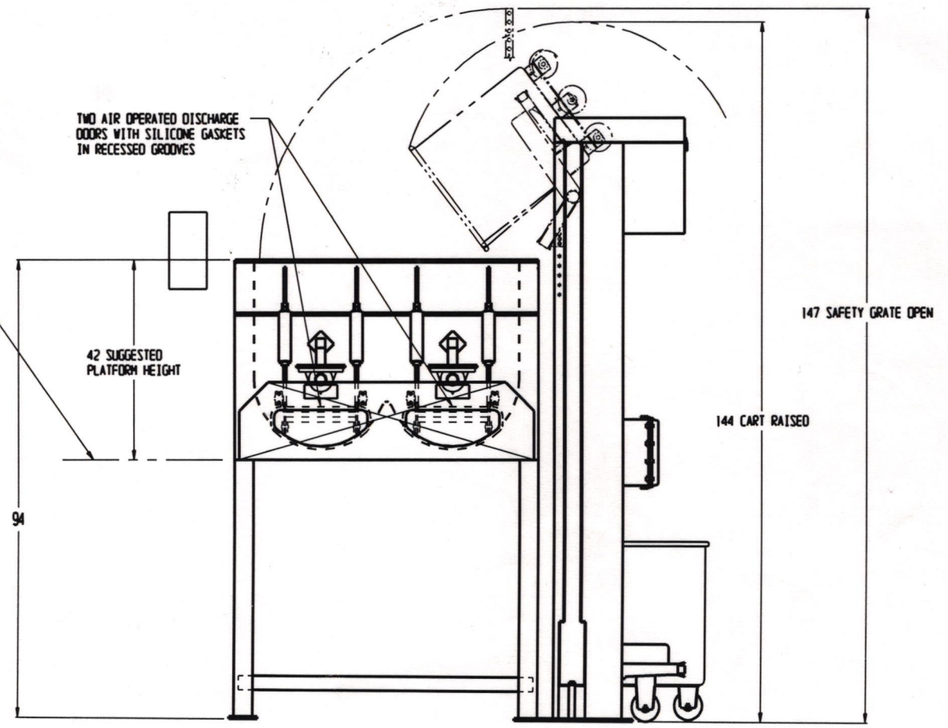

REFERANCE
EARLIER AMY'S MACHINE

SEE SEPARATE PARTS LIST

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES FOR MACHINED PARTS ARE: DECIMALS XX ±.010, XXX ±.005, FRACTIONS 1/2 TO 1/16 ±1/32, ANGLES ±1°, SURFACES 125. BREAK ALL CORNERS .010 MAX. INTERPRET PER ANSI Y14.5M. TOLERANCE FOR FABRICATED AND SHEET METAL PARTS IS ±1/16

DO NOT SCALE DRAWING

MATERIAL

FINISH

DRAWN CJO 05APR00

APPLICATION DM-28072

ORIG. J/N 992115

Blentech corporation

TITLE: SYSTEM LAYOUT

DRAWING NO. 0-15160 REV. -

SCALE 1/16 FILE NAME 1516001-.PRT SHEET 1 OF 1