

## Kombi 7211-CeDe SO02 1900kgl

The Kombi 7211-CeDe SO02 has a unique 7000mm long and 480mm wide frame making it the perfect device for lifting long format structural glass fins and curtain walling.

This special vacuum lifter is loaded with two independent vacuum circuits, each designed to safely handle glass units weighing up to 900kg.

Glass units can be safely rotated into required position thanks to the Kombi's 180° lockable rotation.

## **Key Features**


- Capacity: 900kg
- Dual circuit vacuum system with reserve tank, non-return valve and vacuum gauge for each circuit
- Manual 180° rotation lockable at 90°
- 12v rechargeable battery with integral 110v or 240v charger and low battery warning
- Audio-visual low vacuum warning
- · Adjustable suspension eye
- Length of suspension bar: 3.85m

## **Reference Code**

VGL19



Adjustable suspension eye

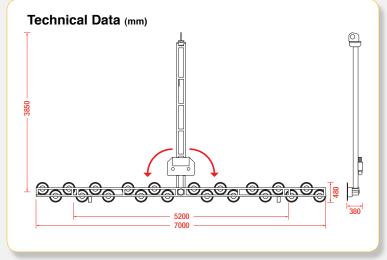

Safe working load (smooth, clean surface at 60% vacuum)	capacity:	900kg	600kg
Number of suction cups	cups:	20	14
Suction cup	description:	black rubber, not abrasion resistant, heat resistant up to 100°F	
Suction cup diameter	diameter:	300mm	
Suitable for lifting	material properties: surface: example:	gastight / non-porous smooth glass, plastic boards, ceramic plates, sheet metals, coated boards	
Weight of lifter	approx:	360kg	
Depth of lifter	depth:	380mm	
Rotation	rotation:	90° manual left & right lockable	
Vacuum system	dual circuit:	1 pump, 2 vacuum reserve tanks	
Voltage	pump: battery charger: mains:	12v DC from rechargeable battery 110v/240v 50/60Hz single phase factory selectable 110v/240v 50/60Hz single phase	
Standard accessories	standard:	cable remote control, 2 x extension arms with pads (increasing the capacity from 600kg to 900kg)	
Optional accessories	optional:	infrared remote control, wheeled stand	

