

GROENEWEGEN MACHINES B.V.

TIELSEWEG 23

2994 LG BARENDRECHT – HOLLAND

INDUSTRIETERREIN VAANPARK 4

TELEFOON: +31-(0)180-417777

FAX: +31-(0)180-417655

BTW NR: NL0026.30.965.B01

POSTBANK: 708060

ABN-AMRO: 47.98.25.440


HANDELSREGISTER ROTTERDAM:NR: 24106996

WEBSITE: WWW.GROENEWEGENMACHINES.NL

E-MAIL: INFO@GROENEWEGENMACHINES.NL

Geomatic

Ø 360 x 1000 mm

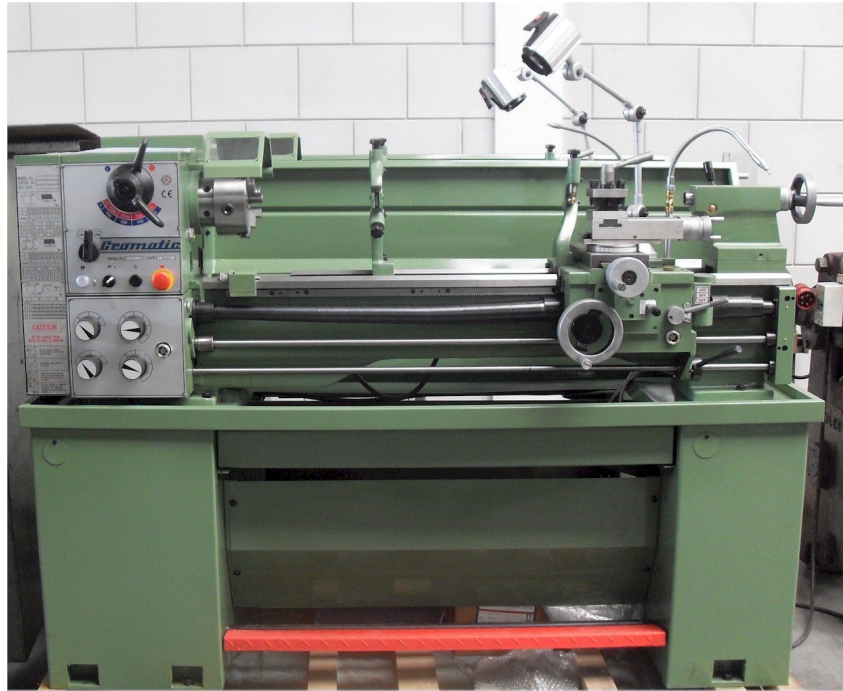

- Precision lathe with hardened and grinded bedways.
- Apron with automatic cross and long feeds.
- Main spindle executed with hardened and grinded gears running in oilbath.
- Removable gap.
- Quick change system thread cutting positions.
- Safety device to prevent executing thread cutting and automatic feed at the same time.
- Chuck – and spindle guard.
- Foot brake.
- Thread cutting indicator.
- Incl standard accessories;
3 – and 4 jaw chuck, face plate, fixed steady, travelling steady, 2 fixed centres, chip guard, coolant equipment, lighting, set of tools and instruction book.

Centre height	180 mm	Metric threads	0,45 – 10 mm
Centre length	1000 mm	Whitworth threads	2¼ – 40 tpi
Turning diameter bed	360 mm	Chuck taper	Camlock 4
Turning diameter slide	225 mm	Cross movement	160 mm
Turning diameter in gap	490 mm	Tool slide movement	75 mm
Length of gap	200 mm	Diameter pinole	35 mm
Spindle through	38 mm	Spindle taper pinole	MK 3
Spindle taper	MK 5	Movement pinole	100 mm
Spindle speeds 8 pcs	70 – 2000 rpm	Motor	1.5 KW/440V-60hz
Feed long	0.078- 1.044 mm/rev.	Dimensions	1940x750x1520 mm
Feed cross	0.022 – 0.298 mm/rev.	Weight	620 kg