


SAFARI

VERTICAL BALERS



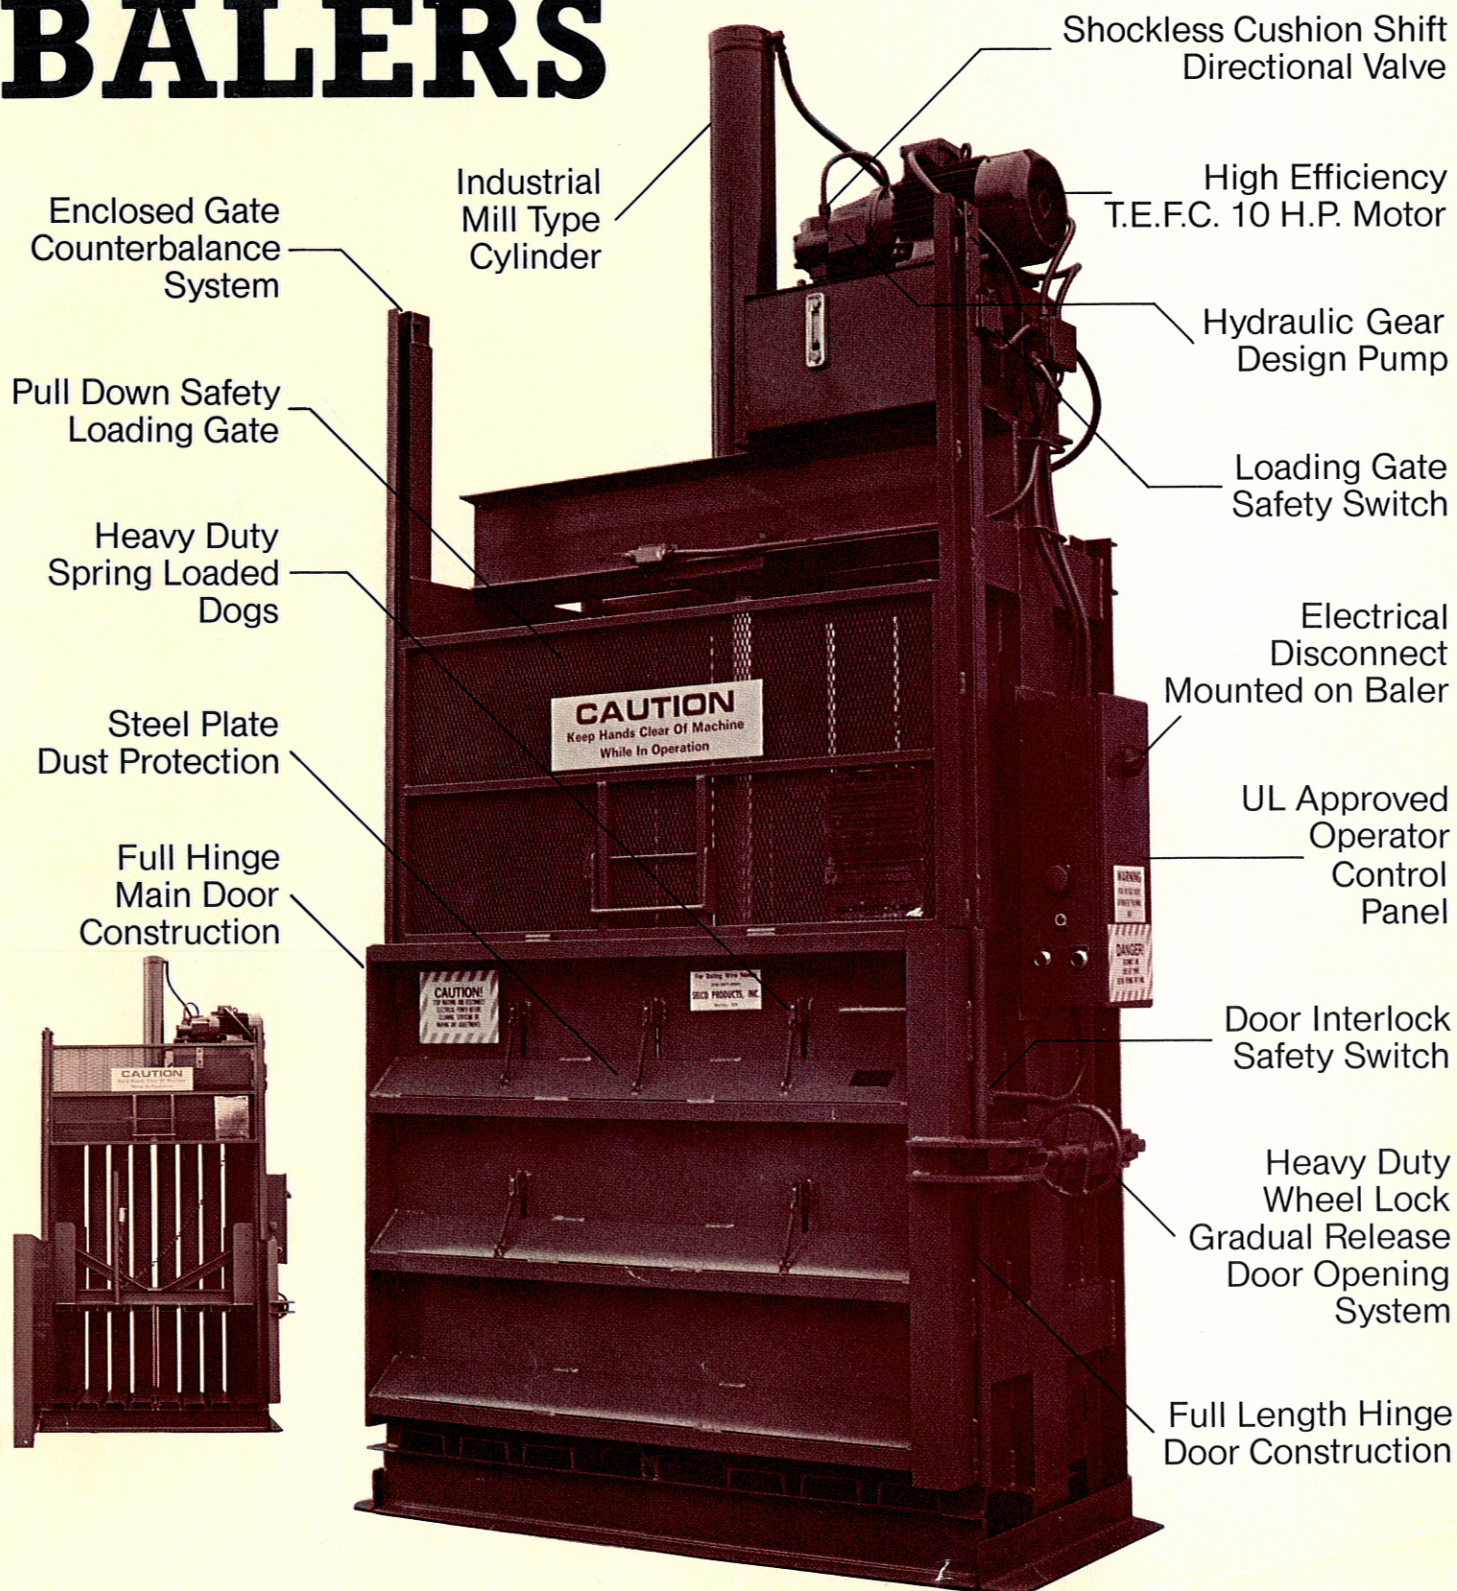

P.O. DRAWER 406, BAXLEY, GEORGIA 31513
912-367-4661 • 912-367-9832 • 912-367-9208

SPECIFICATIONS		VI-4LP	V4-HDLP	V4-HD	VI-5LP	VI-5	V5-HDLP	V5-HD	V-6	VS-6M	VS-6
Bale Size in Baler	Length	48"	48"	48"	60"	60"	60"	60"	72"	72"	72"
	Width	30"	30"	30"	30"	30"	30"	30"	30"	42"	42"
	Height	42"	42"	48"	42"	48"	48"	48"	48"	48"	48"
Bale Weight (Depending on Material)		400 lbs. 550 lbs.	500 lbs. 700 lbs.	600 lbs. 750 lbs.	600 lbs. 800 lbs.	600 lbs. 900 lbs.	600 lbs. 900 lbs.	800 lbs. 1,000 lbs.	900 lbs. 1,200 lbs.	900 lbs. 1,300 lbs.	1,200 lbs. 1,500 lbs.
Cycle Time Under No Load		44 Sec.	34 Sec.	45 Sec.	34 Sec.	45 Sec.	34 Sec.	45 Sec.	45 Sec.	45 Sec.	52 Sec.
Operating Pressure		1,900 PSI	2,200 PSI	2,200 PSI	1,900 PSI	1,900 PSI	2,200 PSI	2,200 PSI	2,000 PSI	2,200 PSI	2,200 PSI
Motor Horse Power		5	10	10	10	10	10	10	10	10	15
Overall Platen Pressure		37,300 lbs.	62,170 lbs.	62,170 lbs.	53,694 lbs.	53,694 lbs.	62,170 lbs.	62,170 lbs.	56,520 lbs.	62,170 lbs.	84,600 lbs.
Bale Tie Wires		Four-14 Ga. x 14 Ft.	Four-14 Ga. x 14 Ft.	Four-14 Ga. x 14 Ft.	Five-14 Ga. x 14 Ft.	Five-14 Ga. x 14 Ft.	Five-14 Ga. x 14 Ft.	Five-14 Ga. x 14 Ft.	Six-14 Ga. x 14 Ft.	Six-12 Ga. x 18 Ft.	Six-12 Ga. x 18 Ft.
Hydraulic Pump		5.78 GPM	12 GPM	12 GPM	12 GPM	12 GPM	12 GPM	12 GPM	12 GPM	12 GPM	18 GPM
Oil Reservoir Capacity		12 Gal.	20 Gal.	20 Gal.	20 Gal.	20 Gal.	20 Gal.	20 Gal.	20 Gal.	20 Gal.	20 Gal.
Feed Opening		48"Wx18"H	48"Wx18"H	48"Wx28"H	60"Wx18"H	60"Wx28"H	60"Wx18"H	60"Wx28"H	72"Wx28"H	72"Wx32"H	72"Wx32"H
Main Cylinder		5" Bore 33" Stroke	6" Bore 33" Stroke	6" Bore 48" Stroke	6" Bore 33" Stroke	6" Bore 48" Stroke	6" Bore 33" Stroke	6" Bore 48" Stroke	6" Bore 48" Stroke	6" Bore 48" Stroke	7" Bore 54" Stroke

(Specifications subject to change without notice.)

Features:

- A. Automatic Bale Size System
- B. Soft-Shift Shockless Hydraulic Circuit
- C. Safety Interlock Circuit on Bale Door and Safety Feed Gate
- D. Semi-Automatic Bale Ejection System, Automatic Ejector Release
- E. Factory Wired for Easy Installation
- F. Spring Loaded Retainer Dog System
- G. Manual Pull Down Safety Feed Gate

Note: All models have six point replaceable wear guide system.

Electrical Controls: Nema 12; dust tight design; UL approved components (common to all models).

Stationary retainer dogs on standard models. Spring loaded retainer dogs on "HD" models.

Distributed by:


Safety Features:

- A. Motor Overload Protectors Standard on all units.
- B. Safety Loading Gate must be closed—if raised 1/2" during cycle, Baler will shut down.
- C. Balers equipped with Electrical Safety Interlocks to prevent cycling with doors open.

Selco Balers comply with ANSI Z 245.5 "Safety Requirements for Baling Equipment."

MODEL	A	B	C	WEIGHT
VI-4LP	38	63.5	118	4,000 lbs.
V4-HDLP	38	63.5	119	4,300 lbs.
V4-HD	38	63.5	147	4,500 lbs.
VI-5LP	38	75.5	119	4,300 lbs.
VI-5	38	75.5	147	4,500 lbs.
V5-HDLP	38	75.5	119	4,800 lbs.
V5-HD	38	75.5	147	5,000 lbs.
V-6	38	87.5	147	5,500 lbs.
VS-6M	48	88	152	6,500 lbs.
VS-6	48	88	169	8,000 lbs.

*ALL DIMENSIONS IN INCH

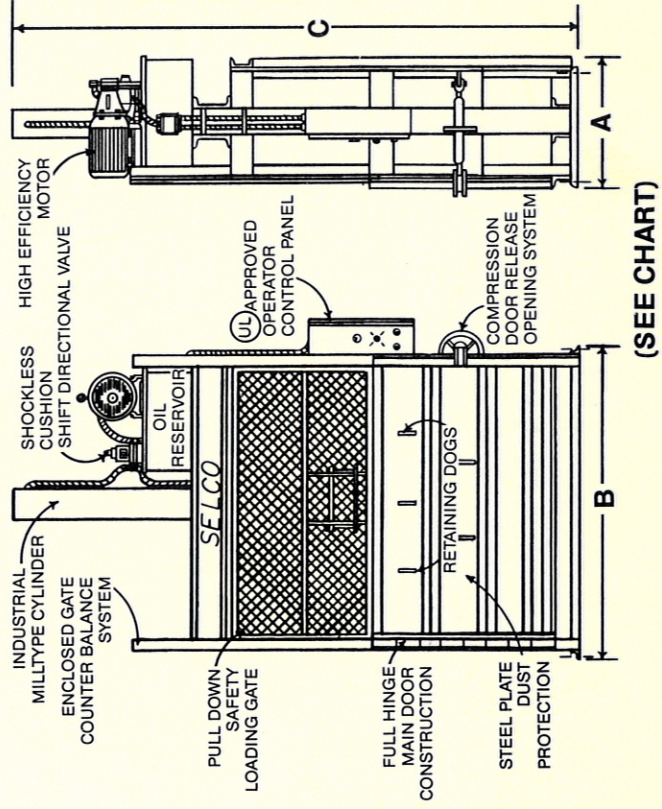

(SEE CHART)