
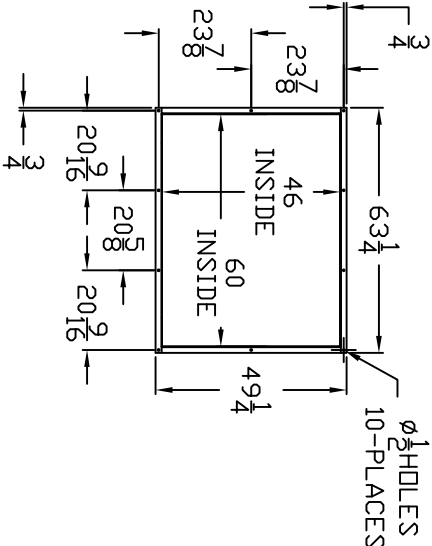


GROUP 14				
	ED-659	ED-849	ED-1280	ED-1330
DIM	25 H.P.	30 H.P.	30 H.P.	50 H.P.
A	304-1/4	304-1/4	304-1/4	315-1/4
B	38-3/4	38-3/4	38-3/4	40-5/8
C	28-3/4	28-3/4	28-3/4	32-7/8
D	21-5/16	26-9/16	26-9/16	28-9/16
E	48-9/16	48-9/16	48-9/16	54-7/16
F	40	40	40	51
G	16	16	16	16

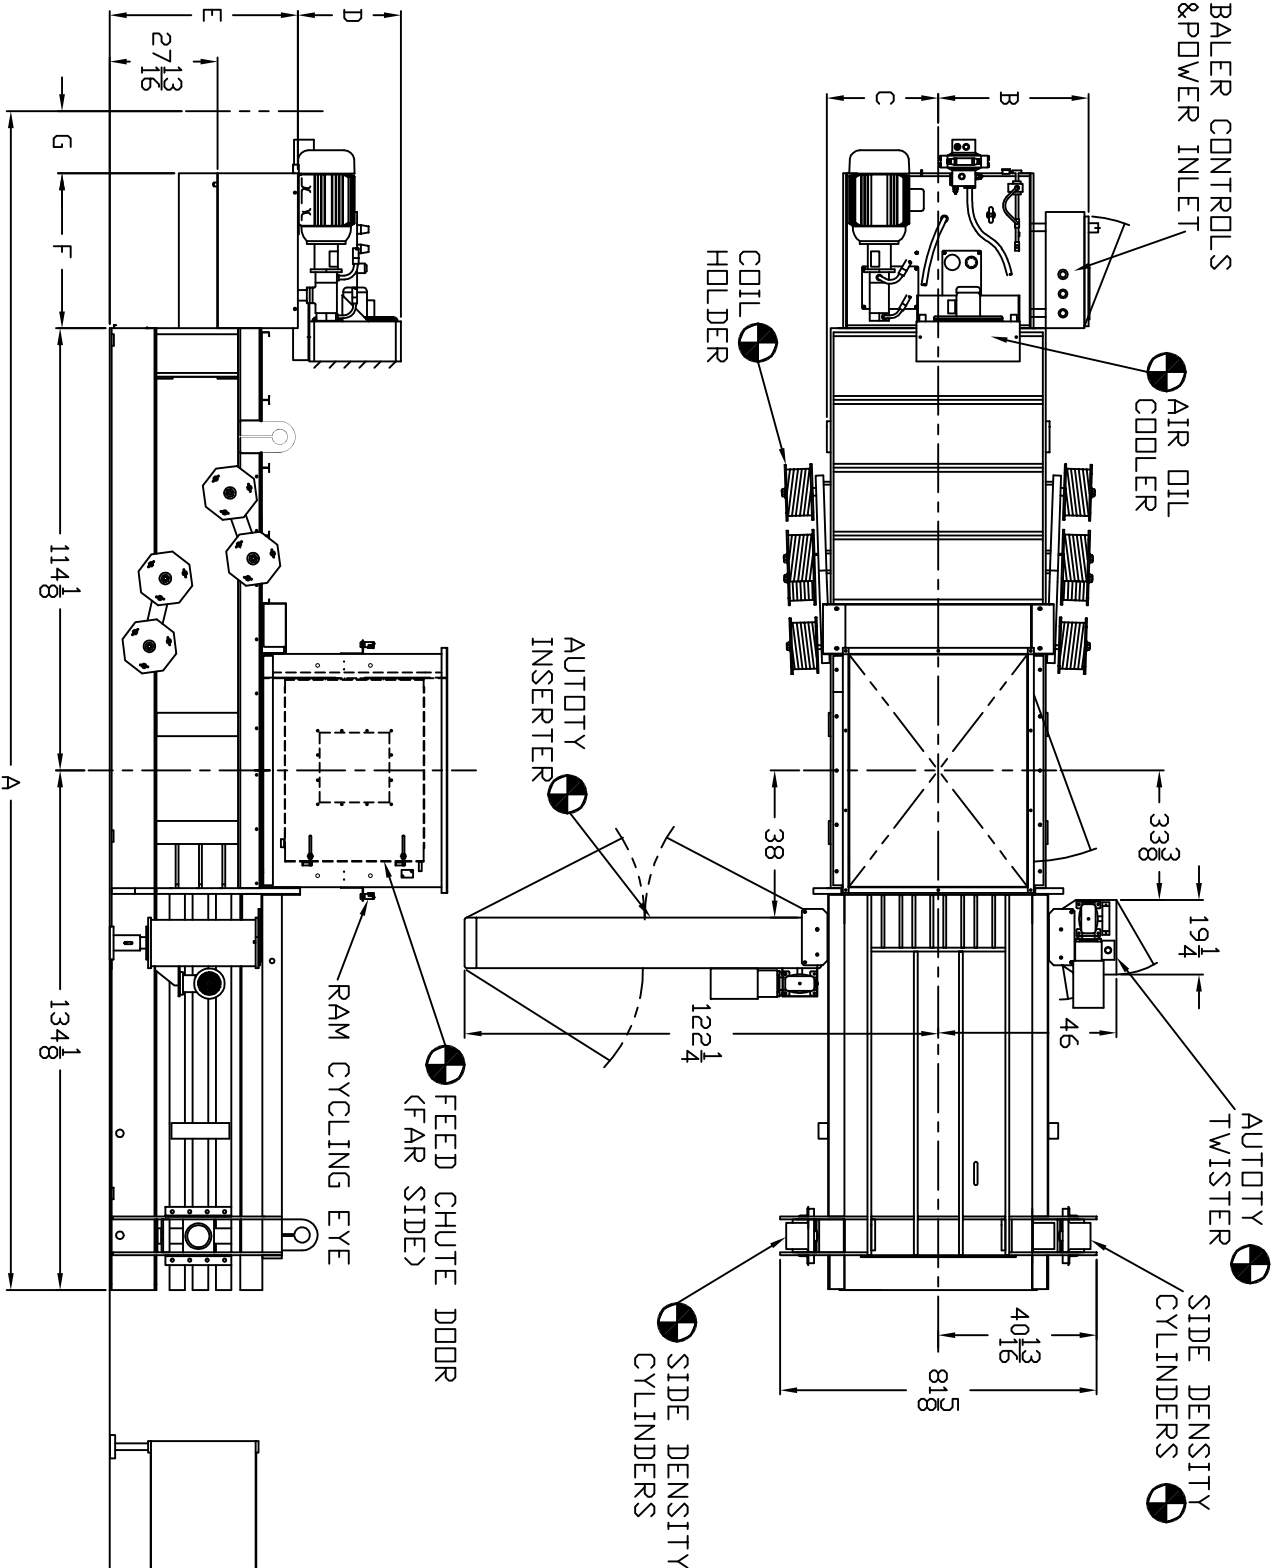


OPTIONAL EQUIPMENT

4900G CONFIGURATION
BALER - RIGHT HAND
AUTODY - RIGHT HAND

TOLERANCES - UNLESS OTHERWISE SPECIFIED:

FRACTIONAL	+/- 1/64
DECIMAL	0.000 +/- 0.005
DECIMAL	0.00 +/- 0.01



THIS DRAWING IS THE PROPERTY OF
EAST CHICAGO MACHINE TOOL CORP.

THE INFORMATION DISCLOSED HEREIN IS NOT TO BE REPRODUCED, COPIED OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY, AND IS NOT TO BE USED IN WHOLE OR IN PART TO ASSIST IN MAKING OR TO FURNISH ANY INFORMATION FOR THE MAKING OF DRAWINGS, PRINTS, APPARATUS, OR PARTS THEREOF, EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY EAST CHICAGO MACHINE TOOL CORP.

BALEMASTER®
DIV. OF EAST CHICAGO MACHINE TOOL CORP.
CROWN POINT, INDIANA

4900G BALER
60" FEED CHUTE

DO NOT SCALE
WORK TO DIMENSIONS
SCALE: 1=50

B/M YES
REQD NO

DR. LLN CH. APP.

01-07-00 234B0143-00

AS WITH ANY OTHER PIECE OF EQUIPMENT, ADEQUATE CLEARANCE SHOULD BE PROVIDED FOR USUAL CLEANING, SERVICE AND MAINTENANCE OPERATIONS.

1" DIA HOLES FOR
3/4" ANCHOR BOLTS
TYP 06-PLACES