



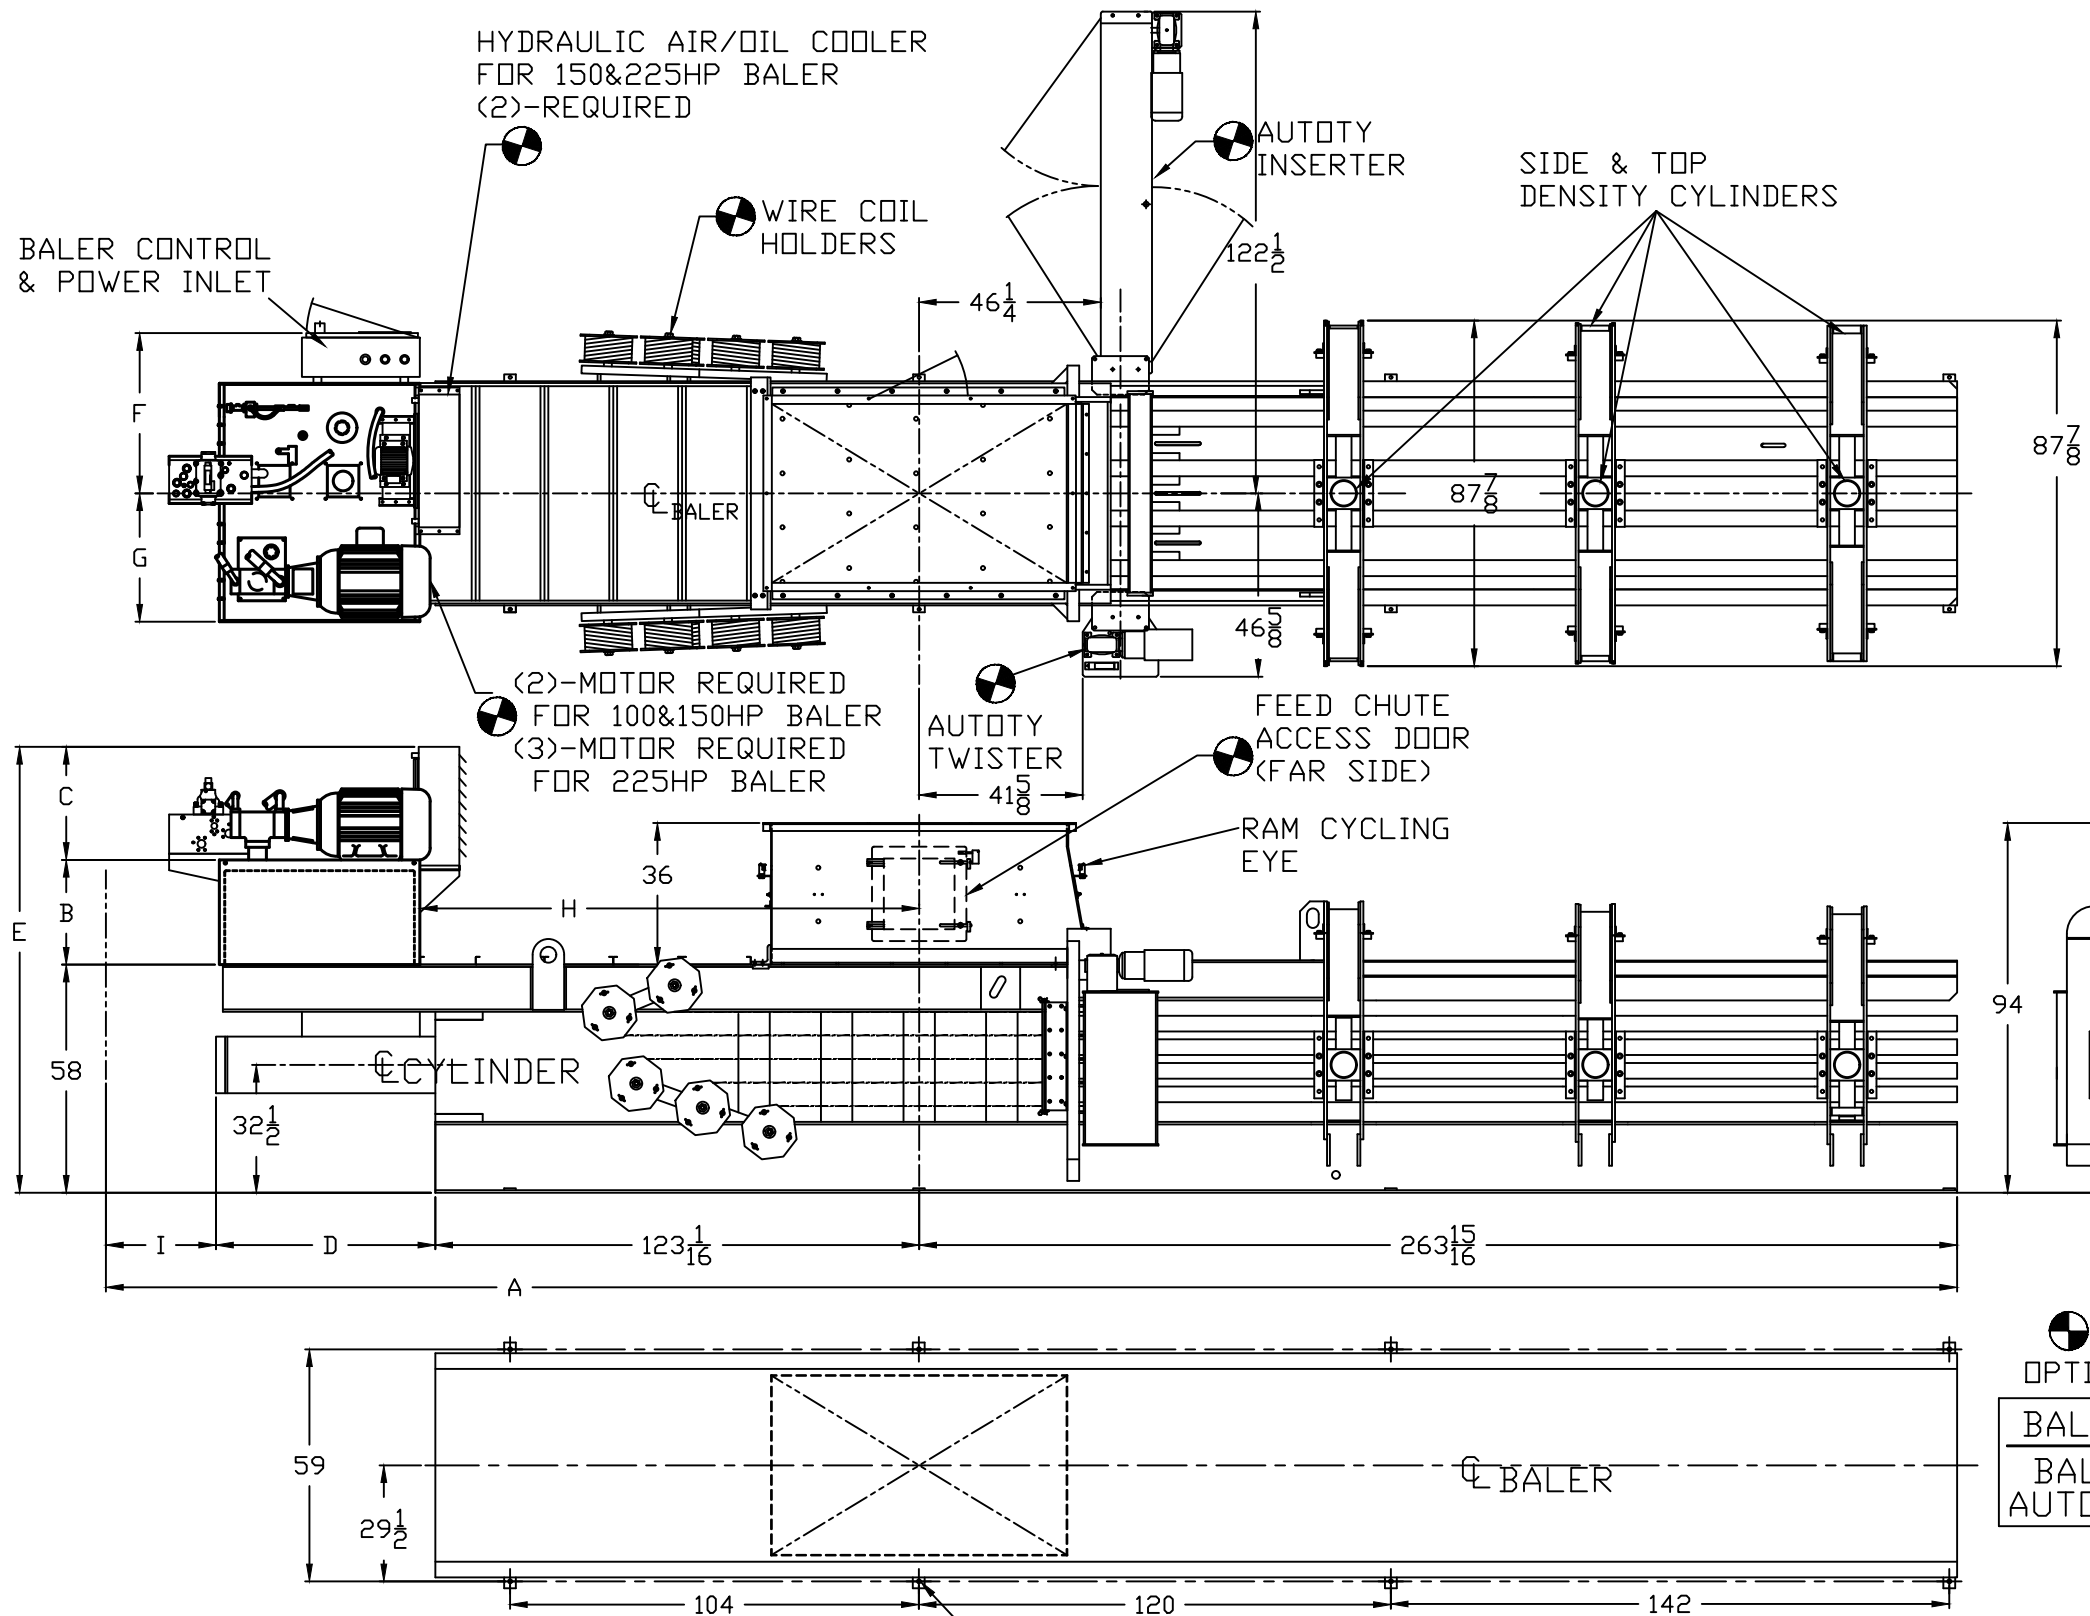

GROUP 8 (12" CYLINDER)					
ED	690	970	1340	1850	2450
HP	50	75	100	150	225
A	470-3/4	470-3/4	495-3/16	495-3/16	498-3/16
B	26-5/8	26-5/8	22-1/2	22-1/2	21-1/4
C	28 9/16	28-3/4	35-11/16	29-1/8	37-7/16
D	55-3/4	55-3/4	76-3/16	76-3/16	83-3/16
E	113-3/16	113-3/8	116-3/16	109-5/8	116-3/16
F	40-3/4	40-3/4	42-13/16	44-9/16	46-7/8
G	32-5/8	32-5/8	42-13/16	44-9/16	46-7/8
H	127	127	127	127	127
I	28	28	32	32	28

REV C

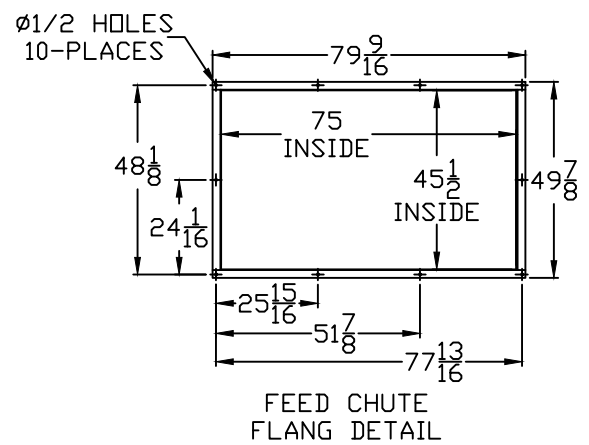

OPTIONAL EQUIPMENT SYMBOL

BALER CONFIGURATION

BALER - STANDARD

AUTO-TIE - LEFT HAND

E	01-10 2022	RTH	UPDATED INSERTER & TWISTER GEOM. FOR MOUNTING PLATES
D	10-13 2021	RTH	UPDATED DIMENSION TABLE REDIMENSIONED TANK AREA
NO.	DATE	IN.	REMARKS


BALEMASTER®

DIV. OF EAST CHICAGO MACHINE TOOL CORP.

CROWN POINT, INDIANA

4500G-12" CYLINDER BALER LAYOUT			
DO NOT SCALE WORK TO DIMENSIONS		SCALE: 1=50	
B/M REQ'D	YES NO		
RTH DR.	CH.	APP.	
10-21-10		234B0190-02	
DATE:			

TOLERANCES - UNLESS OTHERWISE SPECIFIED:			
FRACTIONAL	+/- 1/64		
DECIMAL	0.000 +/- 0.005		
DECIMAL	0.00 +/- 0.01		



THIS DRAWING IS THE PROPERTY OF
EAST CHICAGO MACHINE TOOL CORP.

THE INFORMATION DISCLOSED HEREIN IS NOT TO BE REPRODUCED, COPIED OR OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY AND IS NOT TO BE USED IN WHOLE OR IN PART TO ASSIST IN MAKING OR TO FURNISH ANY INFORMATION FOR THE MAKING OF DRAWINGS, PRINTS, APPARATUS, OR PARTS THEREOF, EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY EAST CHICAGO MACHINE TOOL CORP.

NOTE: FOR 225 H.P. BALERS THE BALER CONTROLS AND POWER INLET WILL BE MOUNTED ON THE BALER AND NOT ON THE OIL TANK. THE OIL TANK WILL THEN BE CENTERED ON THE FRAME.

NOTE: AS WITH ANY OTHER PIECE OF EQUIPMENT, ADEQUATE CLEARANCE SHOULD BE PROVIDED FOR USUAL CLEANING, SERVICE AND MAINTENANCE OPERATIONS.

Ø1HOLES FOR 3/4"DIA
ANCHOR
BOLTS TYP 8-PLACES

h g f e d c b a