



BALER CONFIGURATION
BALER - STANDARD

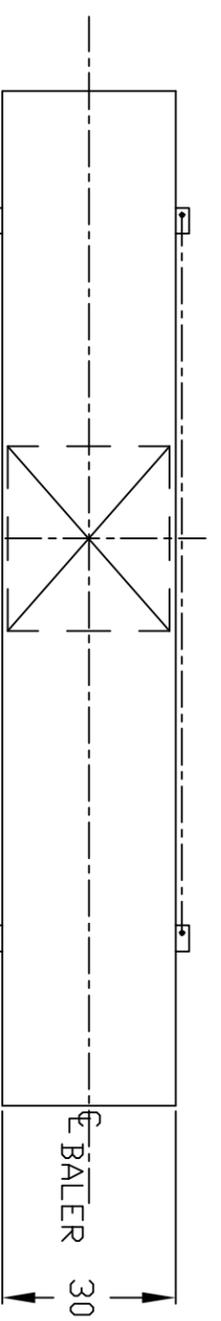

D 1 0 DIA HOLES FOR
3/4 DIA ANCHOR BOLTS
TYPICAL 04 PLACES

AS WITH ANY OTHER PIECE OF EQUIPMENT, ADEQUATE
CLEARANCE SHOULD BE PROVIDED FOR USUAL CLEANING,
SERVICE AND MAINTENANCE OPERATIONS.

TOLERANCES - UNLESS OTHERWISE SPECIFIED:
FRACTIONAL +/- 1/64
DECIMAL 0.000 +/- 0.005
DECIMAL 0.00 +/- 0.01



THIS DRAWING IS THE PROPERTY OF
EAST CHICAGO MACHINE TOOL CORP.

THE INFORMATION DISCLOSED HEREIN IS NOT TO BE REPRODUCED, COPIED OR
OTHERWISE DISPOSED OF, DIRECTLY OR INDIRECTLY AND IS NOT TO BE USED IN
WHOLE OR IN PART TO ASSIST IN MAKING OR TO FURNISH ANY INFORMATION FOR
THE MAKING OF DRAWINGS, PRINTS, APPARATUS, OR PARTS THEREOF, EXCEPT AS
SPECIFICALLY AUTHORIZED IN WRITING BY EAST CHICAGO MACHINE TOOL CORP.

D	11-22 2006	VT	HOLE: 1" WAS 3/4" ANCHOR BOLTS: 3/4 DIA WAS 1/2 DIA	REMARKS
C	09-09 2005	VT	REDRAWN	
NO.	DATE	IN.		

BALEMASTER®
DIV. OF EAST CHICAGO MACHINE TOOL CORP.
CROWN POINT, INDIANA

400 BALEWEL
32" F.C

DO NOT SCALE
WORK TO DIMENSIONS
SCALE: 1=32

B/M YES
REQD NO

DR. RIVETT CH. App.

DATE: 10-07-80 234B0029-00

h g f e d c b a