

WEIGHT

3,175 lbs. to 3,594 lbs. chassis only

# **TIRES/WHEELS**

DRIVE

(1) 10.2" x 4.9" polyurethane

STABILITY CASTER

(2) 3" x 2" polyurethane

**LOAD WHEELS** 

(2) 2.9" x 3.5" polyurethane

# **BATTERY COMPARTMENT**

34" x 11.8" x 26.4"

### **SPEEDS**

48-volt infinitely variable ZAPI travel controller with (4) operator selectable travel settings and turtle speed mode. Standard travel speeds are variable from 0 to 6.5 mph.

Lift speed 33fpm loaded 55 fpm unloaded.

### **ELECTRICAL**

48-volt AC system manages the vehicle's electronic power steering, acceleration, neutral braking and automatic speed reduction both at height and during tight turns when cornering.

AC drive motor provides high torque throughout the entire speed range. The brushless design of AC motor technology drastically reduces maintenance and extends truck run times through efficiency. Lift and lower controls are single speed.

LCD dashboard display includes fault code diagnostics, hour meter, battery discharge indicator, travel speed and drive wheel directional indicator. The JX1HD comes with an emergency power disconnect, bluelight, forward facing LED headlights, key switch and horn as standard equipment.

ASK SUPPORT VEHICLE

JX1HD-162 / 210

CAPACITY

1,200 lbs. total vehicle capacity up to 126" elevation

- 300 lbs. operator compartment
- 700 lbs. front work platform
- 200 lbs. rear "hide away" tray

### **MAST**

Heavy duty I-beam design provides excellent stability at height. Steel mast channels and side mounted lift cylinders increases platform capacity.

# **CHASSIS**

Three point chassis design along with 180° drive motor steering arc provides exceptional maneuverability. Powerhead mounted stability casters add additional truck stability and operator confidence at working heights of up to 24 feet.

# **OPERATOR COMPARTMENT**

Ergonomic fingertip controls for travel, lift and lower functions provide for easy and intuitive operation while traveling at height or ground level.

Roomy operator compartment is designed for high productivity and comfort. Large storage compartments are included for paperwork, pick tickets and tools. Retractable compartment guardrails have an audible alarm when raised if the platform is above a modest elevation.

## REGENERATIVE BRAKES

Regenerative braking is applied when the operator removes their hand from travel control or when travel speeds are reduced, Electromagnetic parking brake is applied after the truck is stopped.

# STANDARD FEATURES


- Electronic power steering
- Hide away rear work tray
- Forward facing blue light
- Forward facing LED headlights
- Premium anti-fatigue rubber floor mat

### OPTIONAL EQUIPMENT

- Anchor w/tether and harness
- Tow hitch (3,600lb tow capacity)
- Custom front platform options
- Custom front work basket options
- 12 volt power adapter
- Industrial battery and matching
- Lithium battery and matching charger

# SUPER TASK SUPPORT VEHICLE JX1HD-162 / 210



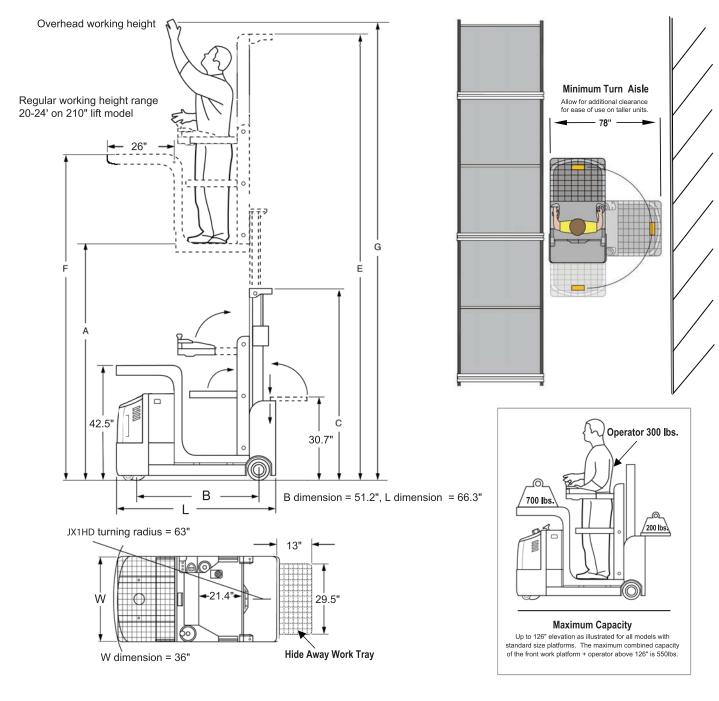

MODEL#	MAST	LIFT HEIGHT	COLUMN HEIGHT	EXT HEIGHT	FRONT WORK PLATFORM HEIGHT	OVERHEAD WORKING HEIGHT	WEIGHT CHASSIS
		Α	С	E	F	G	
JX1HD-162	Triple Stage	162	83.5	235.7	194.8	239	3175 lbs.
JX1HD-210	Triple Stage	210	88.6	288.8	248.8	287	3594 lbs.

For indoor operation and level surfaces only