# PZG (PZ-7) Triplex Drilling Mud Pump



JACKSHAFT RPM	PUMP RPM	MAXIMUM PSI		DISPLACEMENT – DRILLING SERVICE				PISTON CYLINDER	
				MAXIMUM FLOW RATE		PER REVOLUTION		DIAMETER	
		bar	PSI	LPM	GPM	liters	gallon	mm	inch
671	145	115	1672	1920	507	13.24	3.5	178	7
		134	1940	1656	437	11.42	3.02	165	6.5
		145	2098	1531	404	10.56	2.79	159	6.25
		157	2276	1411	373	9.73	2.57	152	6
		187	2709	1186	313	8.18	2.16	140	5.5
		226	3278	980	259	6.76	1.78	127	5
		279	4047	794	210	5.47	1.45	114	4.5
		345	5000	627	166	4.32	1.14	102	4

Weight: Complete pump with large steel skid - 18,000 pounds. Ratings are based on 90% mechanical efficiency and 100% volumetric efficiency.



## PZG (PZ-7) Triplex Drilling Mud Pump



#### **OPTIONAL** FEATURES

- Steel skid under pump only
- Large steel skid with non-skid decking
- Centrifugal suction charging pump
- Rubber valve inserts
- Suction and/or discharge dampeners


- Oil heat exchanger
- External electric-powered lube pump
- Fabricated suction manifold
- Complete package assembly
- · Full open valves

### **STANDARD** FEATURES

- Nodular iron power frame, eccentric, connecting rods, and crossheads
- Double-row spherical roller bearings carry eccentric
- Double-extended Jackshift carried on heavy-duty straight roller bearings
- Dual roller-bearing connecting rod
- Heat-treated alloy steel main gears are bolted to the eccentric
- Replaceable bronze crosshead slides

- Full splash lubrication, with oil pump to feed working parts
- Heat-treated alloy steel, interchangeable fluid cylinders
- Three-rib API-7 urethane insert valves and seats
- Replaceable-type element oil filter and oil pressure gauge
- Threaded valve covers
- Complete piston washing and lubrication system

#### **SPECIFICATIONS**

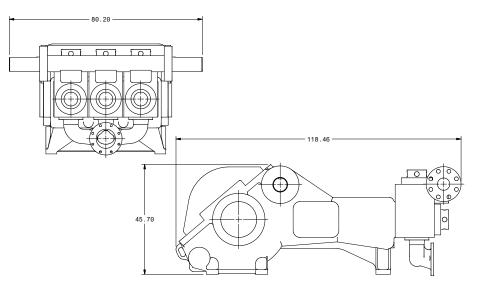

#### **CONNECT WITH US:**



You

