



RELIABLE SAWS. RELIABLE PEOPLE.

877-276-SAWS www.HYDMECH.com

Dealer Information:

HORIZONTAL BAND SAWS



HYDMECH

H-230A

SPLIT FRONT VISE

Provides material clamping on both sides of the blade resulting in short 4" material remnant length during automatic operation.

AUTOMATIC PLC CONTROL

Windows touch screen controller operates the automatic cycle but allows for manual operation as well. A variety of languages can be chosen for message screen display.



Photos may show optional equipment.



STANDARD FEATURES

- Heavy duty cast iron saw head
- Split front vise allows for short 4" remnant length
- Cast iron shuttle features automatic multi-indexing up to 19" in a single stroke with automatic kerf compensation. Powered by ball screw and stepper motor.
- On-demand hydraulics
- Steel guide arms. The idler side guide arm is mechanically connected to the front vise moveable jaw for proper guide arm spacing at all times.
- Variable vise pressure
- 3 HP VFD. True direct blade drive - no belts/pulleys
- Full capacity, full stroking hydraulic vises
- Hydraulic positive down feed
- Blade chamber separates material from cut part
- Cast iron band wheels
- Automatic PLC, touch screen control programmable up to 10 jobs with 5 in queue
- Replaceable blade brush
- Robust steel base
- Automatic chip removal auger
- Blade breakage switch
- Easy access electrical panel and hydraulics
- Designed for safety with saw-in-a-box style
- Out of stock switch
- Mechanical band tensioning with digital readout
- Replaceable carbide guide inserts
- Safety door interlocks
- Flood coolant with wash down hose
- Laser light & Work light

OPTIONAL FEATURES

- Full capacity hydraulic OH bundling
- Mist lubrication
- Idler & powered conveyors
- Idler conveyor & accessories



OPTIONAL FEATURES

- Chip bucket with pump
- Hydraulic overhead bundling
- Mist lubrication
- Variable vise pressure
- Out feed vise
- Right side infeed shuttle
- 10' shuttle infeed
- Idler conveyors
- Powered conveyors

LONG BAR FEED

HORIZONTAL MODELS AVAILABLE WITH LONG BAR FEEDS:

- H-18A
- H-22A
- H-28A

SHUTTLE VISE ASSEMBLY

Capable of indexing speeds up to 5 to 6"/sec with weight capacities up to 10,000lbs. Shuttle up to 120" in a single stroke with repeatability accuracy of +/- .010 per shuttle stroke. Shuttle carriage moves on linear bearings and is driven by rack & pinion mounted gear-reducer/servo 5 Hp motor assembly



Photos may show optional equipment.

H-40/40,

FULL CAPACITY HYDRUALIC VISES

Full capacity, full stroking hydraulic vises with replaceable wear strips provide for efficient vise loading with minimal material vibration.

BUILT IN POWERED ROLLERS

8' of powered rollers, controlled by a variable frequency drive, are built into the bed of the machine for ease of material movement through the saw.



H-40/60, H-40/80



STANDARD FEATURES

- Dual pots horizontal band saws
- One piece design - no alignment necessary
- 8' of powered rollers built into the bed of the machine
- Cast iron guide arms.
- 20 HP VFD. True direct blade drive - no belts/pulleys
- Full capacity hydraulic vises
- Cast iron band wheels
- User friendly operator control
- Replaceable blade brush
- Robust steel base
- Automatic chip removal auger
- Easy access electrical panel and hydraulics
- Blade breakage switch
- Hydraulic band tensioning with digital readout
- 5 HP hydraulic pump provides system pressure
- Replaceable carbide guide inserts
- Hardened, replaceable wear plates
- Safety door interlocks
- Flood coolant with wash down hose
- Work light
- Laser light

OPTIONAL FEATURES

- Outboard vise
- Powered conveyors



STANDARD FEATURES

- Heavy duty cast iron saw head
- Split front vise allows for short 1.8" remnant length
- Fabricated shuttle features automatic multi-indexing up to 23" in a single stroke. Powered by ball screw and stepper motor.
- On-demand hydraulics save energy
- Steel guide arms mounted on linear rails are auto adjustable.
- 6 HP VFD. True direct blade drive - no belts/pulleys
- Full capacity, full stroking hydraulic vises
- Hydraulic positive down feed
- Blade chamber separates material from cut part
- Cast iron band wheels
- Automatic PLC, touch screen control programmable up to 100 jobs with 20 in queue.
- Replaceable blade brush
- Robust steel base
- Automatic chip removal auger

- Easy access electrical panel and hydraulics
- Blade breakage switch
- Designed for safety with saw-in-a-box style
- Out of stock switch
- Mechanical band tensioning with digital readout
- Replaceable carbide guide inserts
- Safety door interlocks with RFID technology
- Flood coolant with wash down hose
- Laser light & work LED light

OPTIONAL FEATURES

- Reversible chip auger
- Mist lubrication
- Variable vise pressure
- Vertical rollers
- Blade deviation monitor
- Idler & powered conveyors

H-320A

EASY ACCESS HYDRAULICS

A 1.7 HP hydraulic pump supplies system pressure which controls all vises and head up/down movement, Easy access for minimal downtime.

BALL SCREW BAR FEED SYSTEM

Improve cycle time! Automatic material indexing up to 23" in a single stroke. The shuttle vise is powered by a ball screw and stepper motor for fast, accurate indexing.



Photos may show optional equipment.

H-14A

TOUCH SCREEN CONTROL

Automatic mode: displays blade speed, blade tension part length, quantity required, and piece count, job run time, total blade run time Machine will shut down when the required number of pieces have been cut.

OPTIONAL OVERHEAD BUNDLING

A hydraulically powered overhead clamp moves down on the material. This option is very effective, and necessary for bundle cutting various material shapes & sizes.



Photos may show optional equipment.



STANDARD FEATURES

- Heavy duty cast iron saw head
- Spilt front vise allows for short 4.7" remnant length
- Cast iron shuttle features automatic multi-indexing up to 24" in a single stroke with automatic kerf compensation. Powered by ball screw and stepper motor.
- On-demand hydraulics save energy
- Steel guide arms mounted on linear rails. Hydraulically powered idler side guide arm is adjustable for proper spacing.
- 8.8 HP VFD. True direct blade drive - no belts/pulleys
- Full capacity, full stroking hydraulic vises
- Hydraulic positive down feed
- Blade chamber separates material from cut part
- Cast iron band wheels
- Swing away automatic PLC, touch screen control programmable up to 100 jobs with 20 in queue.
- Replaceable blade brush

- Robust steel base
- Automatic chip removal conveyor
- Easy access electrical panel and hydraulics
- Blade breakage switch
- Blade deviation monitor
- Out of stock switch
- Electronic band tensioning with digital readout
- Replaceable carbide guide inserts
- Safety door interlocks
- Flood coolant with wash down hose
- Laser light & work light

OPTIONAL FEATURES

- Full capacity hydraulic OH bundling
- Mist lubrication
- Variable vise pressure
- Vertical rollers
- Short remnant of 0.98"
- Idler & powered conveyors



STANDARD FEATURES

- 12° canted head
- Built to withstand heavy fabricating environments
- One piece design - no alignment necessary
- Steel guide arms
- Hydraulic positive down feed
- 20 HP VFD. True direct blade drive - no belts/pulleys
- Full capacity, full stroking hydraulic vises
- Cast iron band wheels
- Semi-automatic PLC control
- High resolution feed rate valve allows for constant feed rate when cutting special alloys
- Replaceable blade brush
- Robust steel base
- Automatic chip removal auger

- Easy access electrical panel and hydraulics
- Blade breakage switch
- Hydraulic band tensioning with digital readout
- Hydraulic carbide guide tensioning
- Hardened, replaceable wear plates
- Safety door interlocks
- Flood coolant with wash down hose
- Laser light

OPTIONAL FEATURES

- Hydraulic overhead clamp
- Pedestal control
- Mist lubrication
- Outboard vise
- Vertical rollers
- Idler & powered conveyors


H-26/42

OPTIONAL MIST LUBRICATION

An alternative to the standard flood coolant system, mist lubrication is an air mist system providing blade lubrication and cooling. No recovery is required as the mist evaporates.

AUTOMATIC CHIP REMOVAL AUGER

Built into the base of most H Series saws, an auger screw pulls chips from the base and discharges at side of the machine for easy clean up.

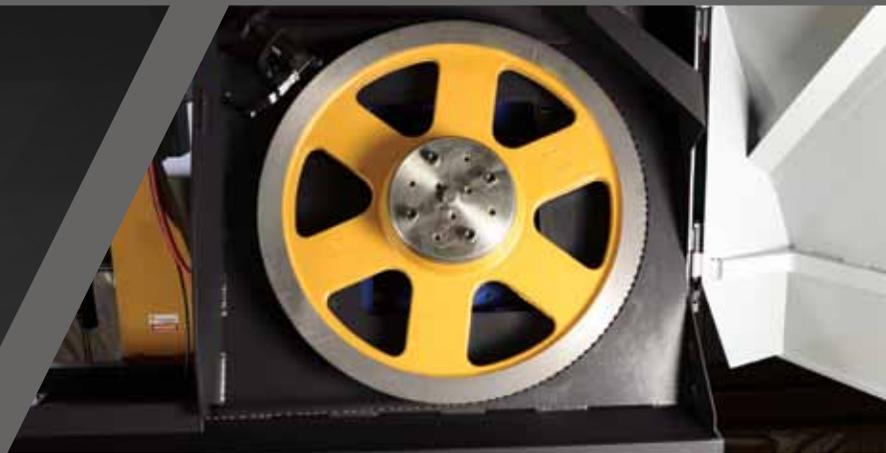


Photos may show optional equipment.



H-32A

VARIABLE VISE PRESSURE

This option provides vise pressure adjustment, on both vises, when thin wall tubing and other light materials are being cut. The feature minimizes the potential for deformation of the material.

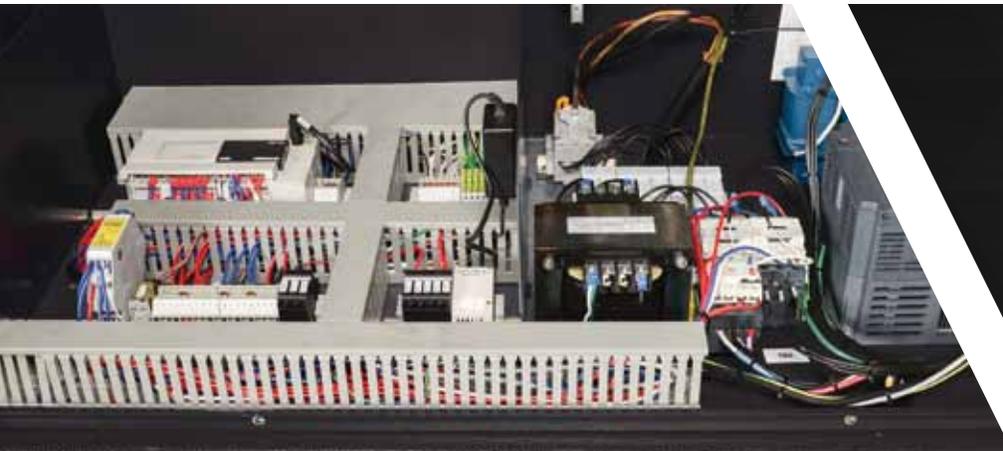

Photos may show optional equipment.



STANDARD FEATURES

- One piece design - no alignment necessary
- Split front vise allows for short remnant length
- Cast iron shuttle features automatic multi-indexing up to 32" in a single stroke with automatic kerf compensation.
- Steel guide arms. The idler side guide arm is mechanically connected to the front vise moveable jaw for proper guide arm spacing
- Hydraulic positive down feed
- Cast iron band wheels
- Automatic chip removal auger
- 20 HP VFD. True direct blade drive
- Full capacity, full stroking hydraulic vises
- High resolution feed rate valve allows for constant feed rate when cutting special alloys
- Blade chamber separates material from cut part
- Automatic PLC control programmable up to 99 jobs with 5 in queue.
- Replaceable blade brush
- Robust steel base
- Blade breakage switch
- Easy access electrical panel and hydraulics

- Hydraulic band tensioning with digital readout
- 5 HP hydraulic pump system pressure
- Hydraulic carbide guide tensioning
- Hardened, replaceable wear plates
- Safety door interlocks
- Flood coolant with wash down hose
- Laser light & work light

OPTIONAL FEATURES

- Full capacity hydraulic overhead bundling
- Variable vise pressure
- 6 degree canted head
- Blade deviation
- Mist lubrication
- Out of stock switch
- Outboard vise
- Outboard vise/w bund.
- Pedestal control
- Roller discharge table
- Vertical alignment rollers
- Idler conveyors
- Powered conveyors



STANDARD FEATURES

- The best Cost Per Cut Performance in its Class
- Spilt front vise allows for short remnant length
- Cast iron shuttle features automatic multi-indexing up to 34" in a single stroke with automatic kerf compensation.
- Steel guide arms. The idler side guide arm is mechanically connected to the front vise moveable jaw for proper guide arm spacing at all times.
- 10 HP VFD. True direct blade drive
- Full capacity, full stroking hydraulic vises
- Hydraulic positive down feed
- High resolution feed rate valve allows for constant feed rate when cutting special alloys
- Blade chamber separates material from cut part
- Cast iron band wheels
- Automatic PLC control programmable up to 99 jobs with 5 in queue.
- Replaceable blade brush
- Robust steel base
- Automatic chip removal auger

- Blade breakage switch
- Hydraulic band tensioning with digital readout
- Hydraulic carbide guide tensioning
- Hardened, replaceable wear plates
- Safety door interlocks
- Flood coolant with wash down hose
- Work light

OPTIONAL FEATURES

- Full capacity hydraulic overhead bundling
- Variable vise pressure
- Blade deviation monitor
- Mist lubrication
- Out of stock switch
- Vertical alignment rollers
- Pedestal Control
- Laser light
- Roller discharge table
- Idler & powered conveyors

H-18A

STEEL GUIDE ARMS WITH HYDRAULIC BLADE GUIDES

The idler side guide arm is mechanically connected to the front vise moveable jaw and moves in tandem with the opening and closing of the vise, ensuring proper positioning of the guide arm spacing,

10 HP DIRECT BLADE DRIVE

Powerful gearbox and motor assembly with a variable frequency drive system. A wide range of available band speeds allows for efficient cutting of many types of material.



Photos may show optional equipment.

H-22A

HYDRAULIC SYSTEM

Swing open hydraulics control both main and shuttle vise, saw stroke, and blade tensioning. Easy view system pressure monitor with easy access, swing out compartment door.



Photos may show optional equipment.



Shown with optional canted head.

STANDARD FEATURES

- One piece design - no alignment necessary
- Split front vise allows for short remnant length
- Shuttle features automatic multi-indexing up to 34" in a single stroke with automatic kerf compensation.
- Steel guide arms. The idler side guide arm is mechanically connected to the front vise moveable jaw for proper guide arm spacing at all times.
- Hydraulic positive down feed
- Blade chamber separates material from cut part
- 10 HP VFD. True direct blade drive - no belts/pulleys Full capacity, full stroking hydraulic vises
- High resolution feed rate valve allows for constant feed rate when cutting special alloys
- Cast iron band wheels
- Automatic PLC control programmable up to 99 jobs with 5 in queue.
- Replaceable blade brush
- Robust steel base
- Automatic chip removal auger
- Easy access electrical panel and hydraulics
- Blade breakage switch
- Hydraulic band tensioning with digital readout

- Hydraulic carbide guide tensioning
- Hardened, replaceable wear plates
- Safety door interlocks
- Flood coolant with wash down hose
- Work light

OPTIONAL FEATURES

- Full capacity hydraulic overhead bundling
- Variable vise pressure
- 6 degree canted head
- Blade deviation
- Mist lubrication
- Out of stock switch
- Outboard vise
- Outboard vise/w bund.
- Pedestal control
- Roller discharge table
- Vertical alignment rollers
- Laser light
- Idler & powered conveyors
- Powered conveyors



Shown with optional canted head.

STANDARD FEATURES

- Split front vise allows for short remnant length
- Shuttle features automatic multi-indexing up to 32" in a single stroke with automatic kerf compensation.
- Steel guide arms. The idler side guide arm is mechanically connected to the front vise moveable jaw for proper guide arm spacing at all times.
- Hydraulic positive down feed
- Blade chamber separates material from cut part
- 10 HP VFD. True direct blade drive - no belts/pulleys Full capacity, full stroking hydraulic vises
- High resolution feed rate valve allows for constant feed rate when cutting special alloys
- Cast iron band wheels
- Automatic PLC control programmable up to 99 jobs with 5 in queue.
- Replaceable blade brush
- Robust steel base
- Automatic chip removal auger
- Easy access electrical panel and hydraulics
- Blade breakage switch
- Hydraulic band tensioning with digital readout
- 5 HP hydraulic pump provides system pressure

- Hydraulic carbide guide tensioning
- Hardened, replaceable wear plates
- Safety door interlocks
- Flood coolant with wash down hose
- Work light

OPTIONAL FEATURES

- Full capacity hydraulic overhead bundling
- Variable vise pressure
- 6 degree canted head
- Blade deviation
- Mist lubrication
- Out of stock switch
- Outboard vise
- Outboard vise/w bund.
- Pedestal control
- Roller discharge table
- Vertical alignment rollers
- Laser light
- Idler conveyors
- Powered conveyors

H-28A


SPLIT FRONT VISE

Provides material clamping on both sides of the blade resulting in short material remnant length during automatic operation.



*Machine photo does not show split front vise.

Photos may show optional equipment.

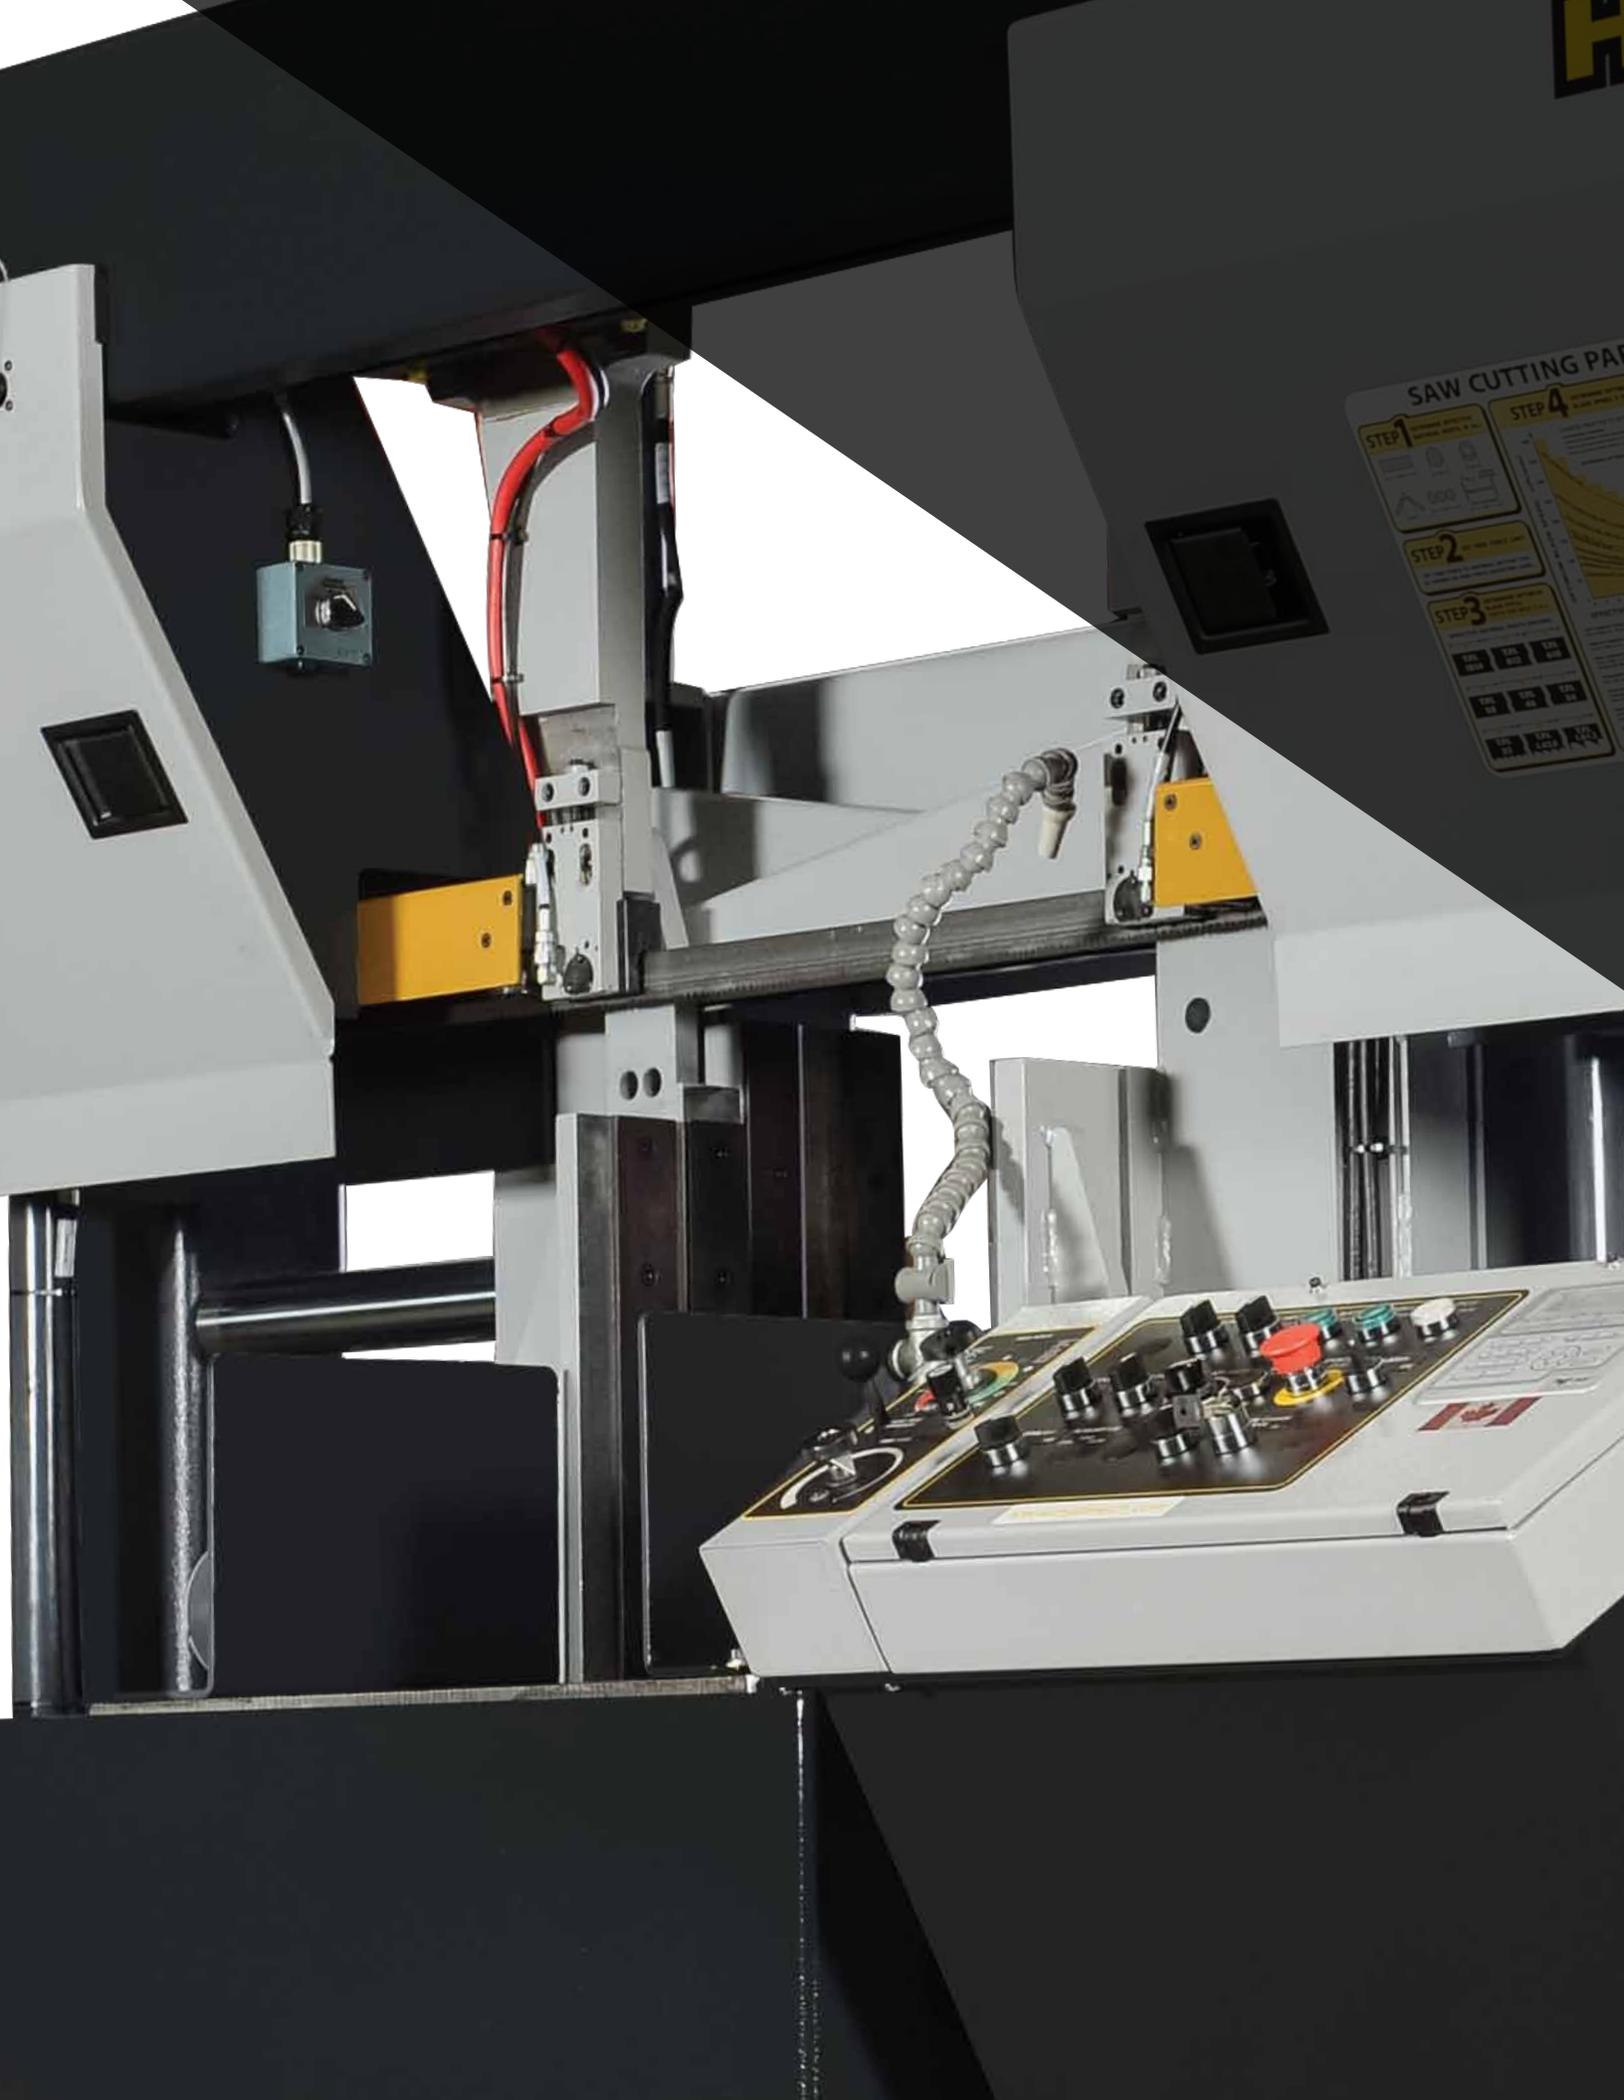

SAW CUTTING PA

STEP 1 [Diagram of saw blade] 3000

STEP 2 [Diagram of saw blade] 3000

STEP 3 [Diagram of saw blade] 3000

STEP 4 [Diagram of saw blade] 3000

3000	3000	3000
3000	3000	3000
3000	3000	3000

SPECIFICATIONS

		H-230A	H-320A	H-14A	H-18A
Rectangular Capacity (h x w)	90°	9" x 9" / 228 mm x 228 mm	12.6" x 13.5" / 280 mm x 343 mm	14" x 14" / 357 mm x 357 mm	18" x 18" / 457 mm x 457 mm
Round Capacity	90°	9" / 228 mm	12.6" / 280 mm	14" / 357 mm	18" / 457 mm x 457 mm
Blade Drive		3 HP VFD / 2.2 kW VFD	6 HP VFD / 4.4 kW VFD	8.8 HP VFD / 6.5 kW VFD	10 HP VFD / 7.4 kW VFD
Blade Speed		50-350 SFM / 15-107 MPM	49-380 SFM / 15-116 MPM	49-380 SFM / 15-116 MPM	50-350 SFM / 15-107 MPM
Blade Size		1" x 9' 9" / 25.4 mm x 2972 mm	1 1/4" x 14' 9" / 31.7 mm x 4496 mm	1 1/4" x 15' 2" / 31.7 mm x 4623 mm	1 1/2" x 19' 2" / 38.1 mm x 5842 mm
Automatic Multi-Indexing		0-19" / 0-482 mm	0-23" / 0-584 mm	0-24" / 0-600 mm	0-34" / 0-863 mm
Table Height		31" / 787 mm	34" / 864 mm	34" / 863 mm	31" / 787 mm
Voltages Available		240 or 480 v	240 or 480 v	240 or 480 v	208, 240, 480, 575 v
Weight		2,200 lbs. / 998 kg	4,400 lbs. / 1996 kg	6,172 lbs. / 2799 kg	8,500 lbs. / 3855 kg
Dimensions	Width	61" / 1549 mm	106" / 2692 mm	88" / 2235 mm	127" / 3225 mm
	Length	63" / 1600 mm	71" / 1803 mm	63" / 1600 mm	88" / 2235 mm
	Height	67" / 1702 mm	80" / 2032 mm	78" / 1981 mm	92" / 2336 mm
		H-22A	H-28A	H-32A	H-26/42
Rectangular Capacity (h x w)	90°	22" x 22" / 559 mm x 559 mm Canted: 20" x 22" / Canted: 508 mm x 559 mm	28" x 28" / 711 mm x 711 mm Canted: 24" x 28" / Canted: 610 mm x 711 mm	32" x 32" / 813 mm x 813 mm Canted: 28" x 32" / Canted: 711 mm x 813 mm	26" x 42" / 660 mm x 1067 mm
Round Capacity	90°	22" / 559 mm Canted: 20" / Canted: 508 mm	28" / 711 mm Canted: 24" / Canted: 610 mm	32" / 813 mm Canted: 28" / Canted: 711 mm	32" / 813 mm
Blade Drive		10 HP VFD / 7.4 kW VFD	10 HP VFD / 7.4 kW VFD	20 HP VFD / 14.7 kW VFD	20 HP VFD / 14.7 kW VFD
Blade Speed		40-300 SFM / 12-91 MPM	40-300 SFM / 12-91 MPM	40-300 SFM / 12-91 MPM	75-300 SFM / 23-91 MPM
Blade Size		2" x 22' 6" / 50.8 mm x 6858 mm	2" x 25' / 50.8 mm x 7620 mm	2 5/8" x 30' 4" / 66.7 mm x 9245.6 mm	2 5/8" x 33' / 66.7 mm x 10058.4 mm
Automatic Multi-Indexing		0-34" / 0-864 mm	0-32" / 0-813 mm	0-32" / 0-813 mm	n/a
Table Height		31" Canted: 35" / 787 mm Canted: 889 mm	31" Canted: 37" / 787 mm Canted: 940 mm	31" Canted: 37" / 787 mm Canted: 940 mm	38" / 965 mm
Voltages Available		208, 240, 480, 575 v	480 v (208, 240, 575*)	480 v (208, 240, 575*)	480 v (208, 240, 575*)
Weight		12,500 lbs. / 5670 kg	18,000 lbs. / 8165 kg	19,500 lbs. / 8845 kg	21,000 lbs. / 9525 kg
Dimensions	Width	141" / 3581 mm	161" / 4089 mm	182" / 4623 mm	217" / 5512 mm
	Length	88" / 2235 mm	92" / 2337 mm	92" / 2337 mm	82" / 2083 mm
	Height	92" / 2337 mm	120" / 3048 mm	120" / 3048 mm	137" / 3480 mm
		H-40/40	H-40/60	H-40/80	
Rectangular Capacity (h x w)	90°	40" x 40" / 1016 mm x 1016 mm	40" x 60" / 1016 mm x 1524 mm	40" x 80"	*Transformer supplied at no charge
Round Capacity	90°	40" / 1016 mm	40" / 1016 mm	40" / 1016 mm	The following models are available with a long bar feed:
Blade Drive		20 HP VFD / 14.7 kW VFD	20 HP VFD / 14.7 kW VFD	20 HP VFD / 14.7 kW VFD	• H-18A
Blade Speed		45-225 SFM / 14-69 MPM	45-225 SFM / 14-69 MPM	45-225 SFM / 14-69 MPM	• H-22A
Blade Size		3" x 37' / 76.2 mm x 11277.6 mm	3" x 40' 4" / 76.2 mm x 12293.6 mm	3" x 43' 10" / 76.2 mm x 13360.4 mm	• H-28A
Table Height		27" / 686 mm	27" / 686 mm	27" / 686 mm	
Voltages Available		480 v (208, 240, 575*)	480 v (208, 240, 575*)	480 v (208, 240, 575*)	
Weight		42,000 lbs. / 19,051 kg	45,000 lbs. / 19,051 kg	52,000 lbs. / 23,587 kg	
Dimensions	Width	215" / 5461 mm	235" / 5969 mm	255" / 6477 mm	
	Length	102" / 2591 mm	102" / 2591 mm	102" / 2591 mm	
	Height	145" / 3683 mm	145" / 3683 mm	145" / 3683 mm	

In line with HYDMECH's policy of on-going product improvement, we reserve the right to modify features and specifications.