







Semi-Automatic Stretch Wrapper


ROTOPLAT 708

SEMI AUTOMATIC STRETCH WRAPPER



The Rotoplat 708 with CUBE Technology is the most innovative stretch wrapper in the market. It is also the easiest to use, thanks to its intuitive seven (7) inch color touchscreen.

-  **SAVE 30-55% ON FILM WITH CUBE TECHNOLOGY**
-  **R-CONNECT NOW INCLUDED AS A STANDARD FEATURE (INCLUDES 36-MONTH INITIAL CELLULAR DATA PLAN)**
-  **SAVE 6 UNIQUE LOAD CONFIGURATIONS**
-  **65" TURNTABLE WITH 28 SUPPORT BEARINGS**
-  **4400 LBS. WEIGHT CAPACITY**
-  **110" STANDARD WRAP HEIGHT**

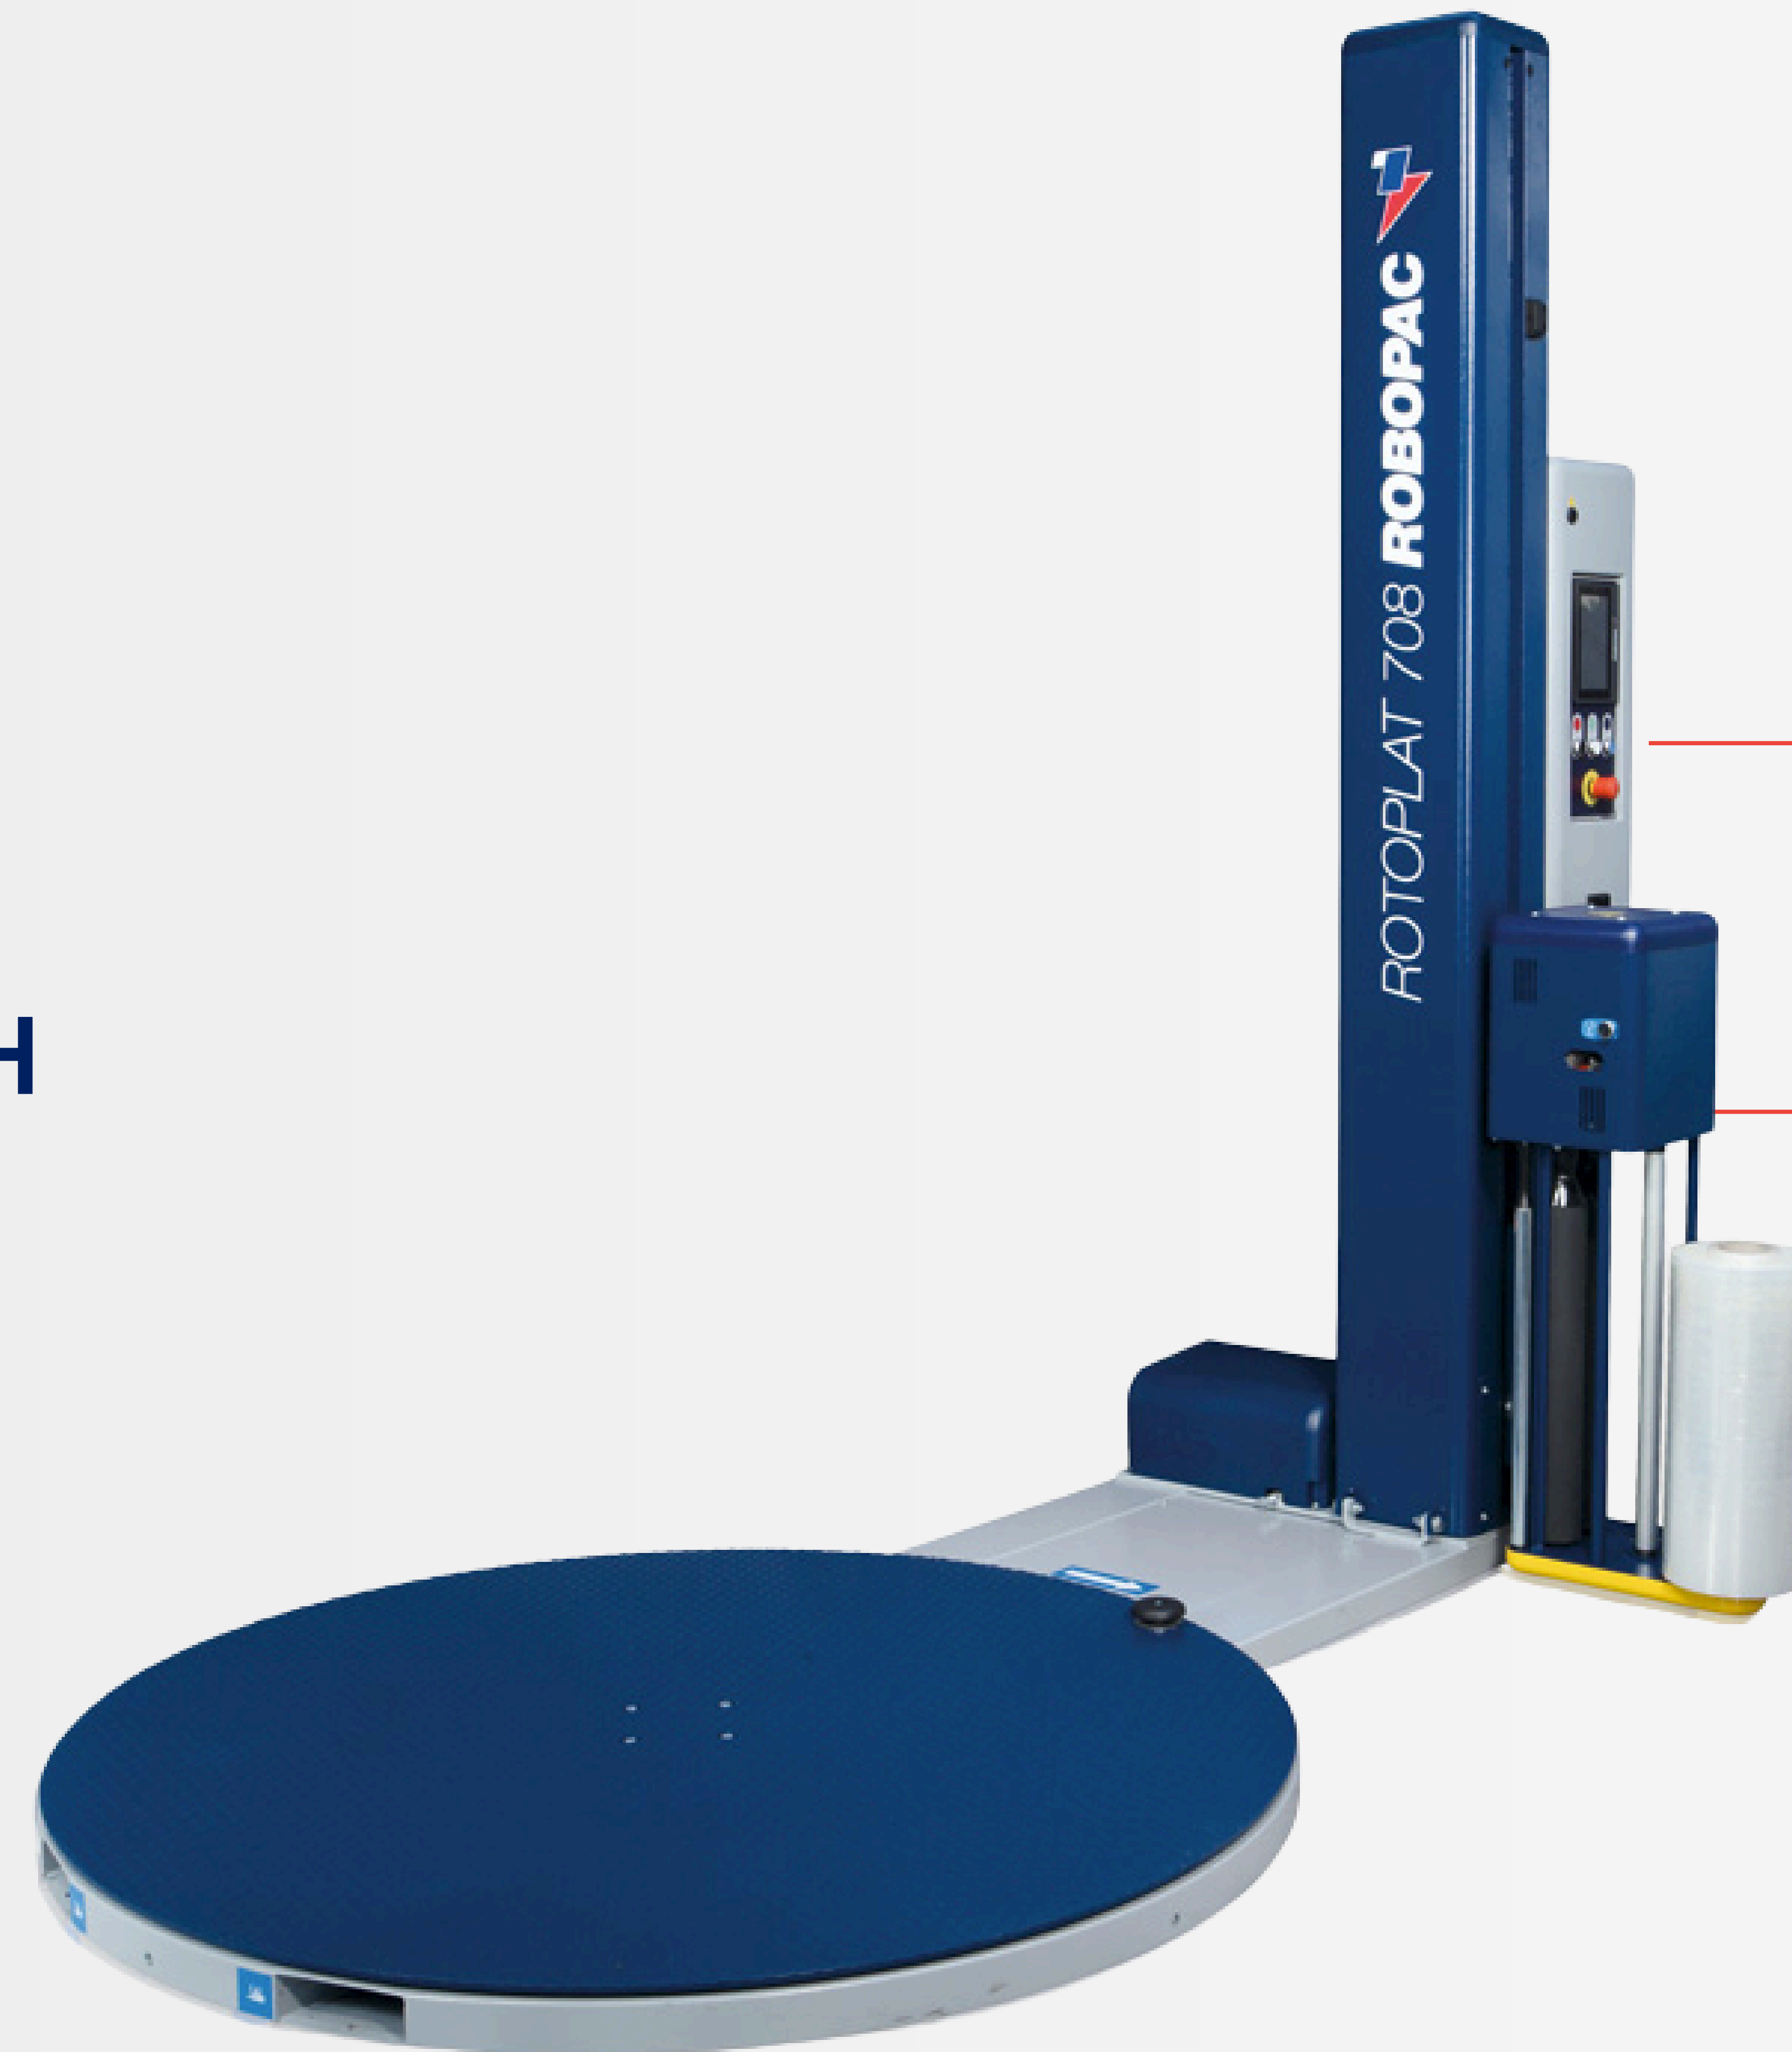

PERFORMANCE FEATURES:

R-CONNECT EQUIPPED

Developed to provide usage and performance data via the cloud. Allowing you to connect with your machines remotely to investigate alarms, adjust parameters, & respond promptly.



COLOR TOUCH SCREEN

The high performance 7-inch color touch screen with icons specifically designed and created by Robopac has led to the implementation of the MULTILEVEL CONTROL function.




PVS CARRIAGE

Powered stretch system controlled by two motors. Stretch ratio adjustable from panel board from 150-400%. Force to the load controlled by patented electronic device and adjustable from panel board.




STAINLESS STEEL VERSION AVAILABLE

The tracing wheel allows to safely follow the profile of all the pallets, allowing the robot to wrap the product in complete autonomy.

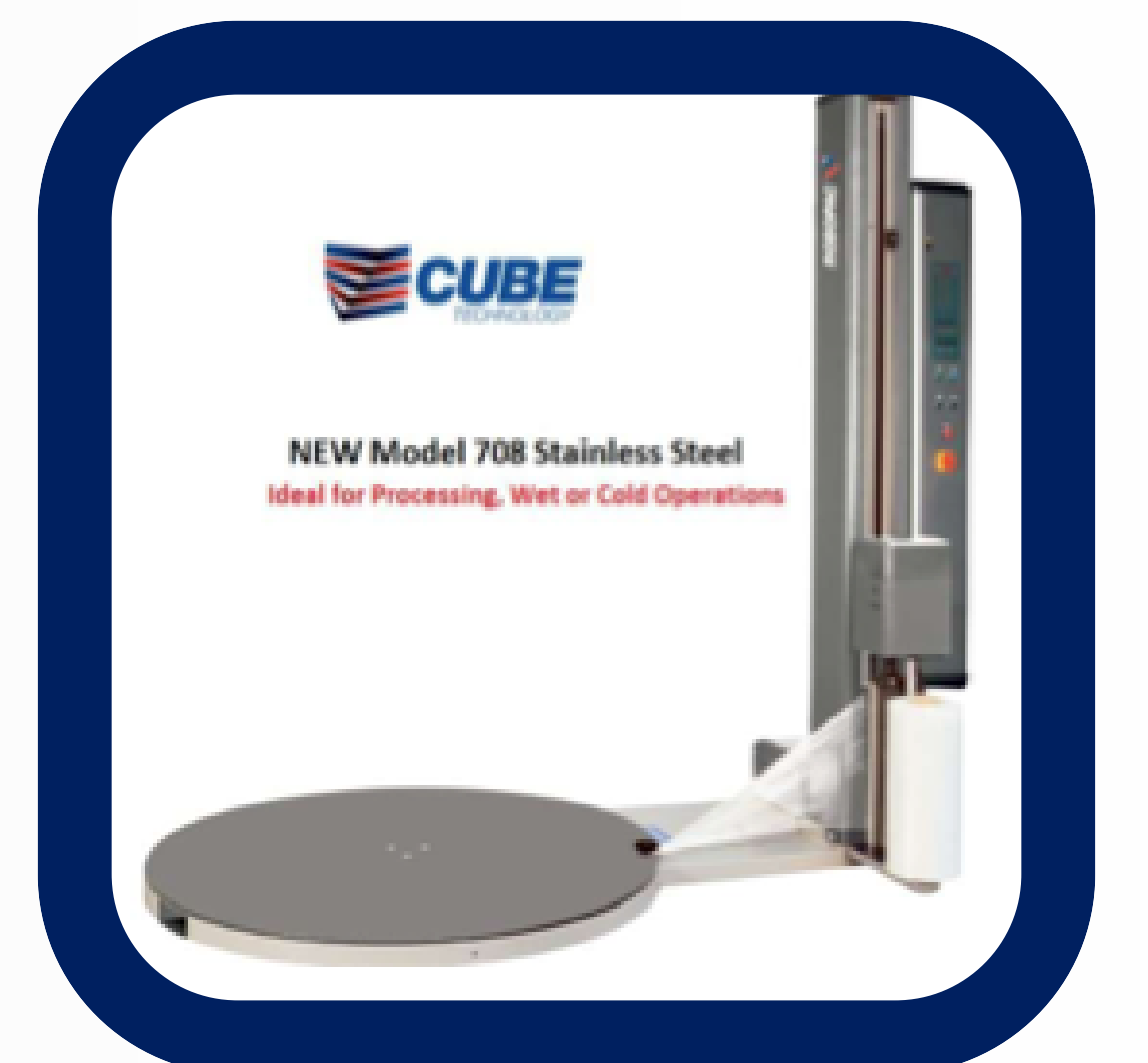

ROTOPLAT 708 SPEC SHEET

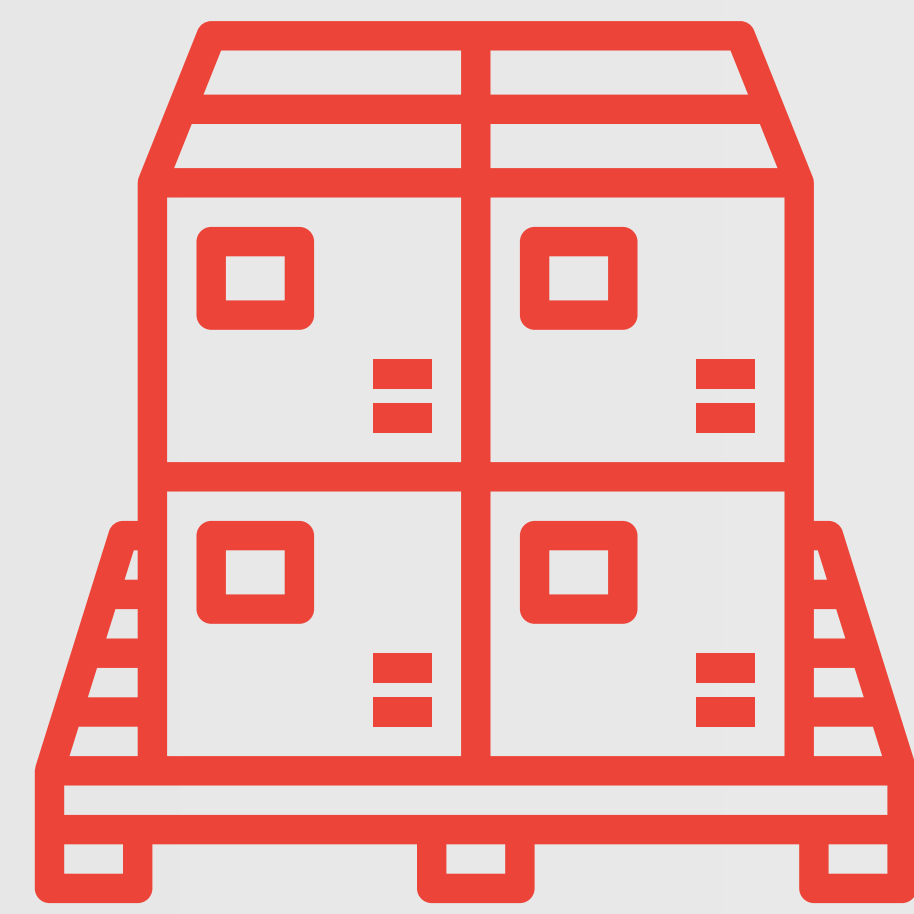

Load Capacity:

- Turntable Size:
65" Diameter
- Maximum Load Height:
110"
- Maximum Load Weight:
4400 lbs.



Film Delivery System

- Containment Force: Multi-Level Variable
- Film Carriage Motor: ½ HP VAC
- Height Sensing: Automatic via photocell
- Film Threading: Patented S-Pattern
- Corner Compensation: Load Cell



Performance Criteria

- Production Speed:
Up to 40 LPH
- Turntable Speed:
5 – 12 RPM
- Turntable Drive:
1 HP VAC



Utility Requirements

- Voltage:
120V, 12 amps, 60 Hz, 1 PH



Safety Features

- Anti-fall device on carriage
- Pressure activated safety stop on carriage
- CE Compliant, UL, CUL

ROBOPACUSA.COM

INFO.US@ROBOPAC.COM

