






Semi-Automatic Stretch Wrapper


LP ROTOPLAT

SEMI AUTOMATIC STRETCH WRAPPER



The operator can easily access from every side and load the machine with hand pallet truck via ramp or using a forklift truck.

-  **SPACE SAVING: REDUCED HEIGHT AND BASE SAVES 60% SPACE – FROM 3 IN. (77MM) TO 1.18 IN. (30MM).**
-  **SAVE SPACE THANKS TO THE REDUCED DIMENSIONS OF THE NEW RAMPS.**
-  **GREAT RELIABILITY: NEW ROTATION TRANSMISSION SYSTEM WITHOUT CHAIN AND ROBOPAC PATENTED BEARING.**
-  **REDUCED HEIGHT: ONLY 1.18 IN. (30MM) PREVENTS FREQUENT ACCIDENTAL BUMPS WITH THE FORKS OF THE FORKLIFT TRUCK FOR EASY LOADING.**
-  **2,600 LBS. MAX WEIGHT LIMIT PER LOAD**

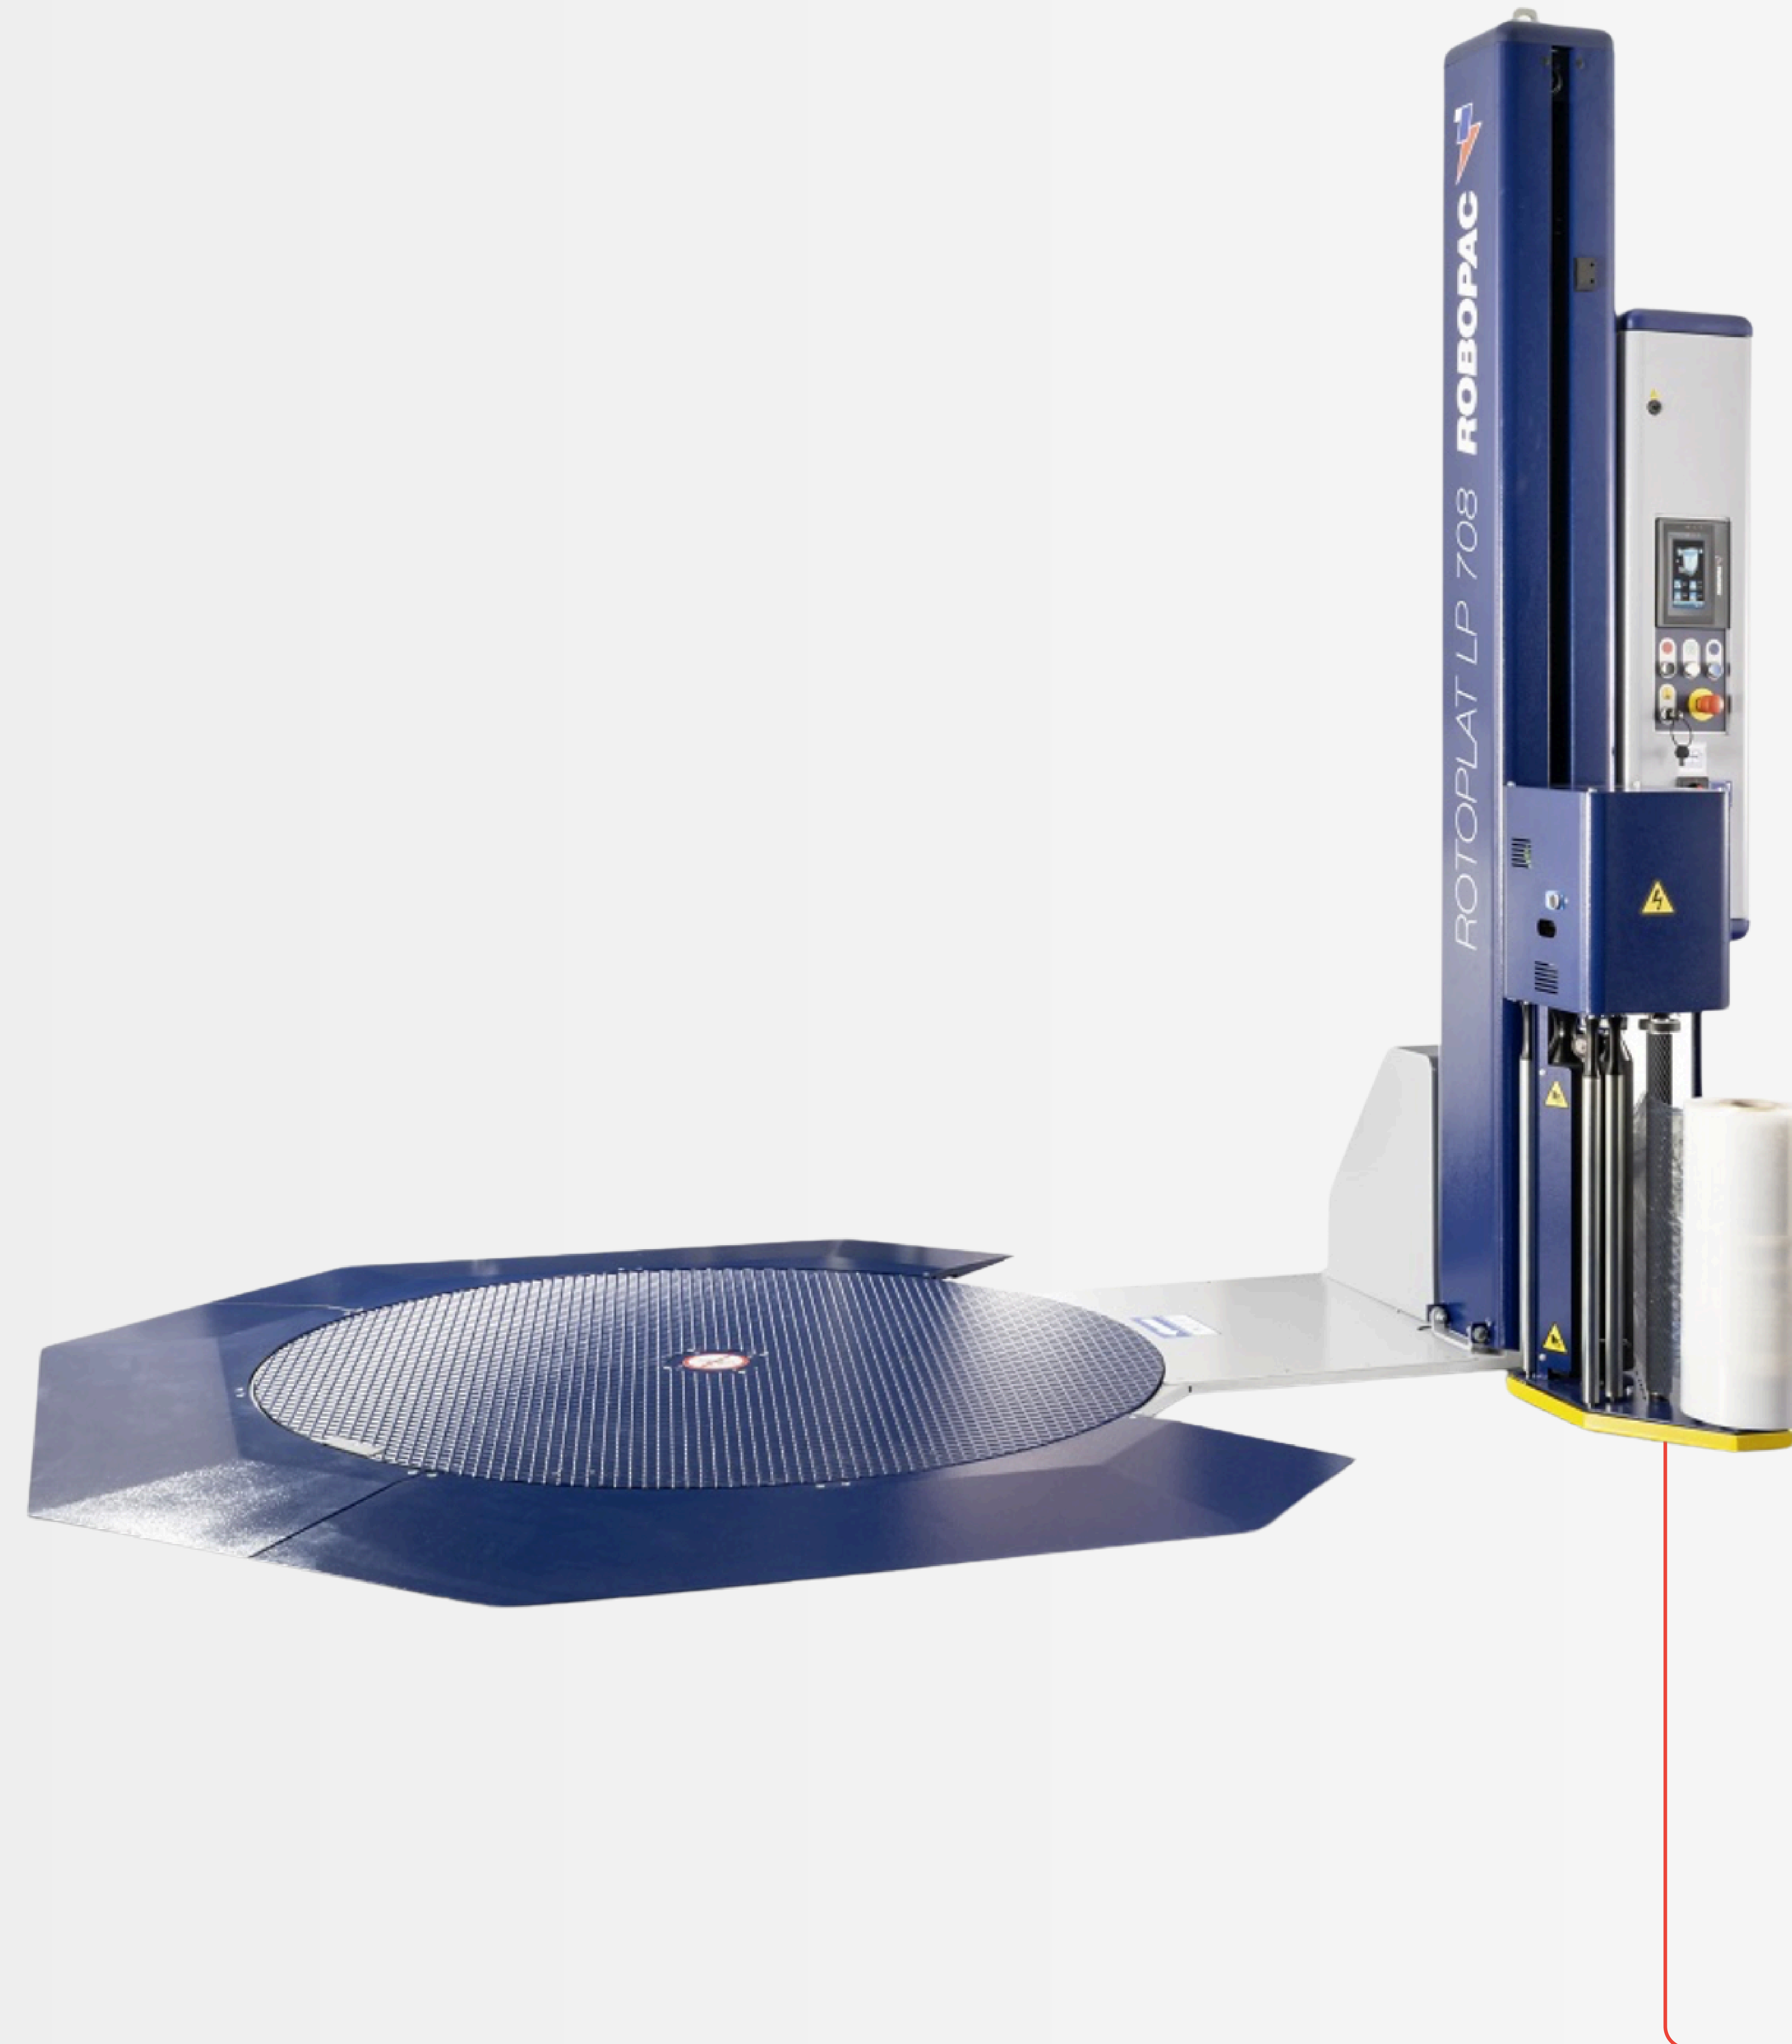

PERFORMANCE FEATURES:

CUBE TECHNOLOGY

Deliver the exact right amount of film at the exactly the right position with exactly the right containment force.

Reduces film costs 30-55%.

Improves load containment.

Reduces product damage by 40%.




PVS CARRIAGE

Powered stretch system controlled by two motors. Stretch ratio adjustable from panel board from 150-400%. Force to the load controlled by patented electronic device and adjustable from panel board.



LP ROTOPLAT SPEC SHEET

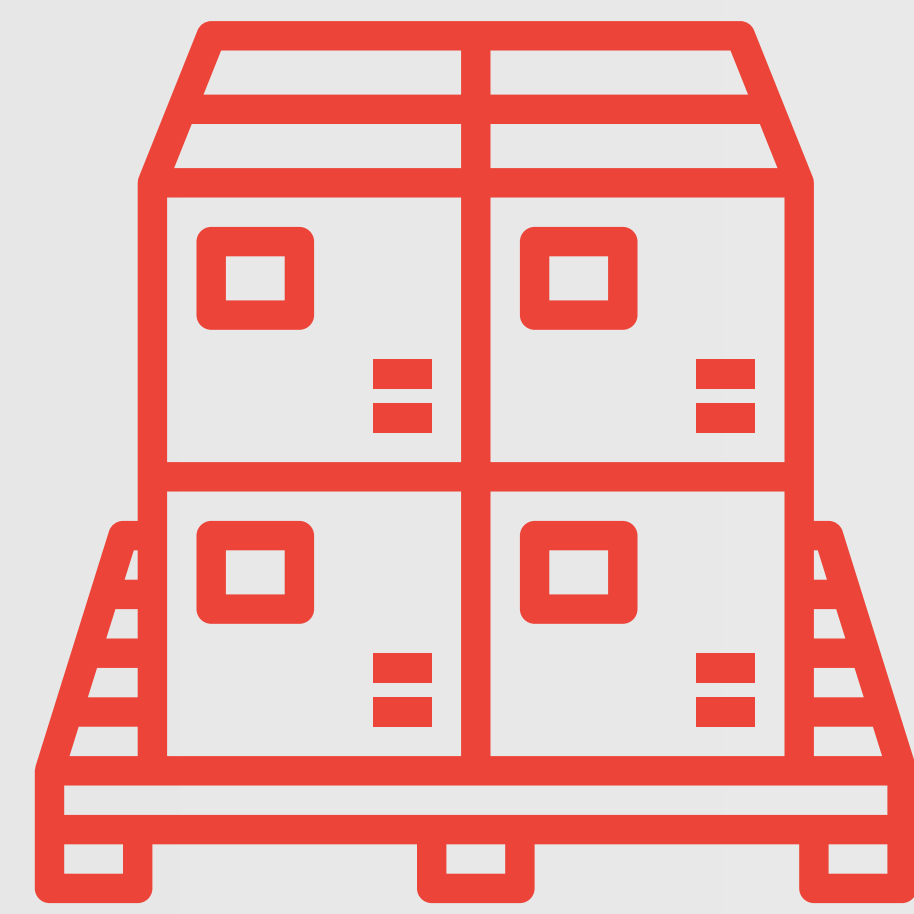

Load Capacity:

- Turntable Size:
65" Diameter
- Maximum Load Height:
87" (up to 122" optional)
- Maximum Load Weight:
2600 lbs.



Film Delivery System

- Friction Roller Drive (FRD)
- Fixed Gear Pre-Stretch
(250%)
- Wrapping Force – Variable
Electronic
- Standard Film Width – 20"
(30" option)



Performance Criteria

- Production Speed:
Up to 40 LPH
- Turntable Speed:
5 – 12 RPM
- Turntable Drive:
1 HP VAC



Utility Requirements

- 120V, 12 amps, 60
Hz, 1 PH
- NEMA 12 Enclosure:
Standard



Safety Features

- Roll Carriage Safety Stop
- CE Compliant; Anti-fall
device

ROBOPACUSA.COM

INFO.US@ROBOPAC.COM

