

Semi-Automatic Stretch Wrapper

ECOPLAT

SEMI AUTOMATIC STRETCH WRAPPER



The highest performance standard features and value in its class.

- ⚡ **STRUCTURAL INTEGRITY – 65” TURNTABLE WITH 28 SUPPORT BEARINGS.**
- ⚡ **MAXIMUM WEIGHT: 4400 LBS.**
- ⚡ **STANDARD WRAP HEIGHT: 86” (110” AVAILABLE)**
- ⚡ **UNIQUE RECORD-A-WRAP FEATURE TO RECORD WRAP PATTERN. START, STOP, JOG UP, JOG DOWN ARE ALL RECORDED. UP TO 20 MOVEMENTS.**
- ⚡ **FILM TENSION BRAKING SYSTEM SPREADS FORCE OUT EVENLY OVER A LARGER SURFACE AREA RESULTING IN A MUCH SMOOTHER FILM DELIVERY. NO “JERKING” MOVEMENTS THAT BREAK THE FILM.**
- ⚡ **CONTROL PANEL: FRD**



PERFORMANCE FEATURES:

FRD CONTROL PANEL

Clear icons make it easy to program.




FRD FILM CARRIAGE

Mechanical Brake is manually adjusted and has an indicator to show the tension setting. There is also a tension on/off lever to allow film to be released for attaching to the pallet without altering the film tension. This system allows tension to be constant and not effected by the size of the film reel.



ECOPLAT SPEC SHEET

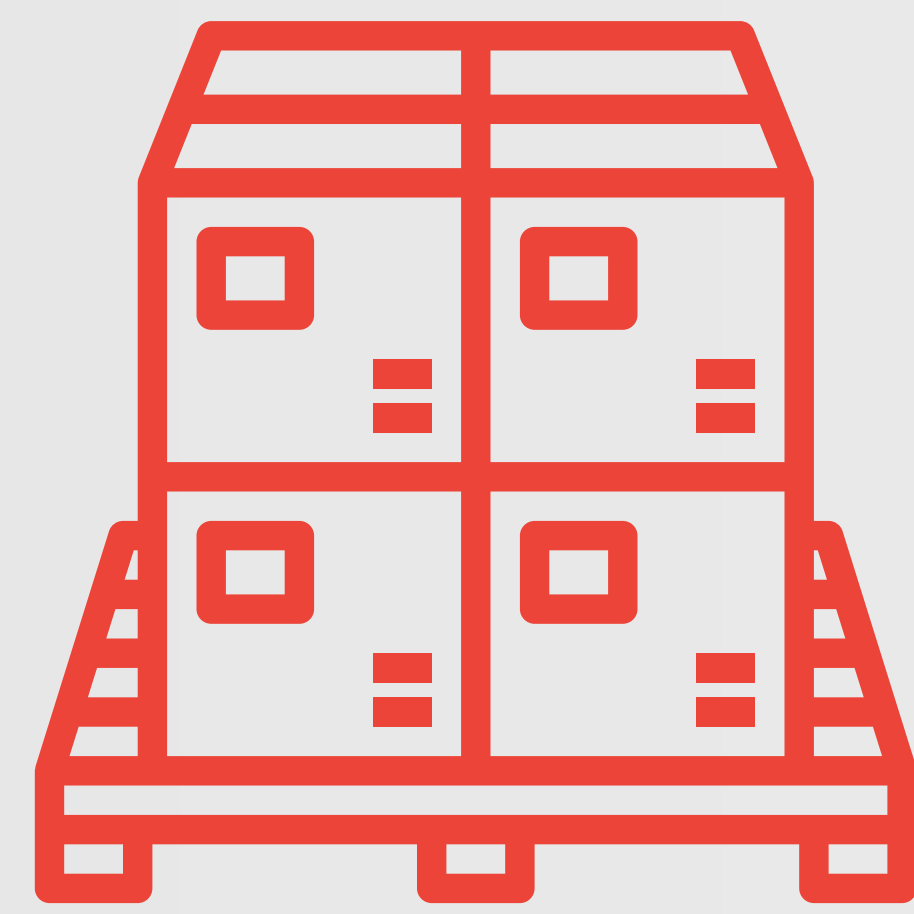


Load Capacity:

- Turntable Size:
65" Diameter
- Maximum Load Height:
86" (110" available)
- Maximum Load Weight:
4400 lbs.



Film Delivery System

- Friction Roller Drive (FRD)
- Pre-stretch – Not available
- Corner Compensation – Core Brake
- Force to Load Control – Electrical
- Standard Film Width – 20" (30" option)

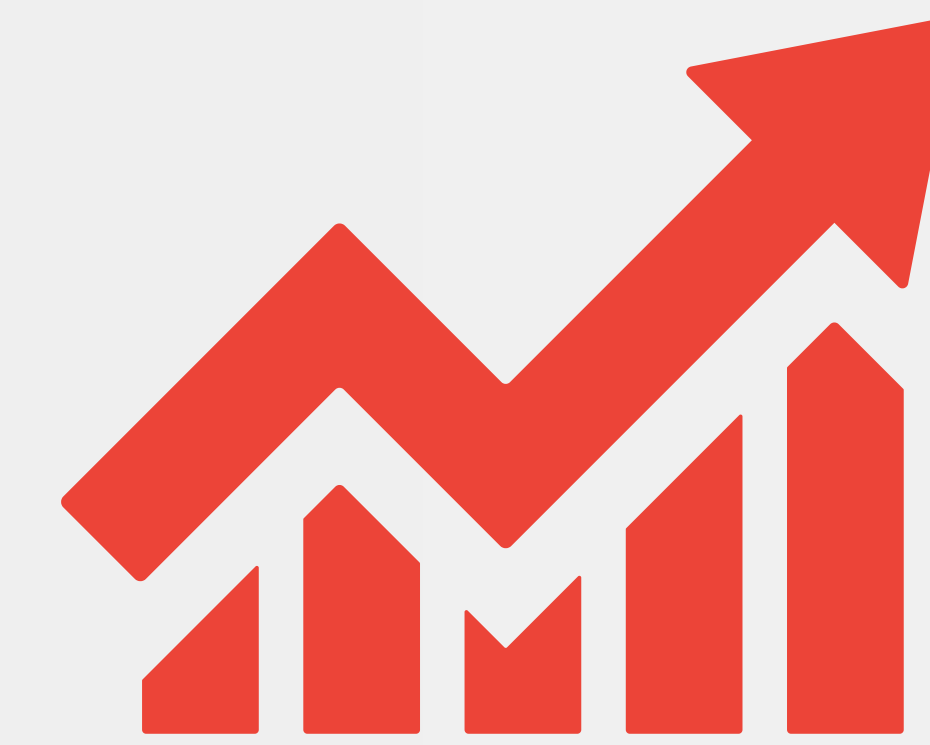

Performance Criteria

- Production Speed:
25 LPH
- Turntable Speed:
4 – 10 RPM
- Turntable Drive:
1 HP VAC



Utility Requirements

- Voltage:
120V, 13.2 AMP, 60 Hz, 1 PH
- NEMA 13 Enclosure:
Standard



Safety Features

- Roll Carriage Safety Stop
- CE compliant
- Anti-fall device
- Lock-out/Tag-out compliant

ROBOPACUSA.COM

INFO.US@ROBOPAC.COM

