









Semi-Automatic Stretch Wrapper

# TECHNOPLAT 708 CS

**SEMI AUTOMATIC  
STRETCH WRAPPER**



***Increase productivity and keep your operators safe by keeping them on the fork truck.***

-  **HEAVY DUTY CLAMP, CUT AND SPREADING SYSTEM**
-  **KEEP DRIVER IN THE DRIVER'S SEAT WHERE THEY CAN BE THE MOST PRODUCTIVE.**
-  **110" WRAP HEIGHT STANDARD**
-  **REMOTE CONTROL INCLUDED**
-  **CUBE TECHNOLOGY DELIVERS THE RIGHT AMOUNT OF FILM AT EXACTLY THE RIGHT POSITION WITH EXACTLY THE RIGHT CONTAINMENT FORCE**
-  **MULTI-LEVEL VARIABLE CONTAINMENT FORCE IS OPTIMIZED AT EACH LEVEL AND IS ADJUSTABLE UP TO NINE (9) TIMES ON EACH LOAD.**
-  **CUBE TECHNOLOGY WILL REDUCE YOUR FILM USAGE BY 30% – 55%.**
-  **R-CONNECT NOW INCLUDED AS STANDARD FEATURE (INCLUDES 36-MONTH INITIAL CELLULAR DATA PLAN).**



## **PERFORMANCE FEATURES:**

### **COLOR TOUCH SCREEN**

The high performance 7-inch color touch screen with icons specifically designed and created by Robopac has led to the implementation of the **MULTILEVEL CONTROL** function.




### **CLAMP, CUTTING AND SPREADING UNIT**

**Technoplat CS is equipped with automatic clamp, cutting, and spreading unit.**





# TECHNOPLAT 708 CS SPEC SHEET

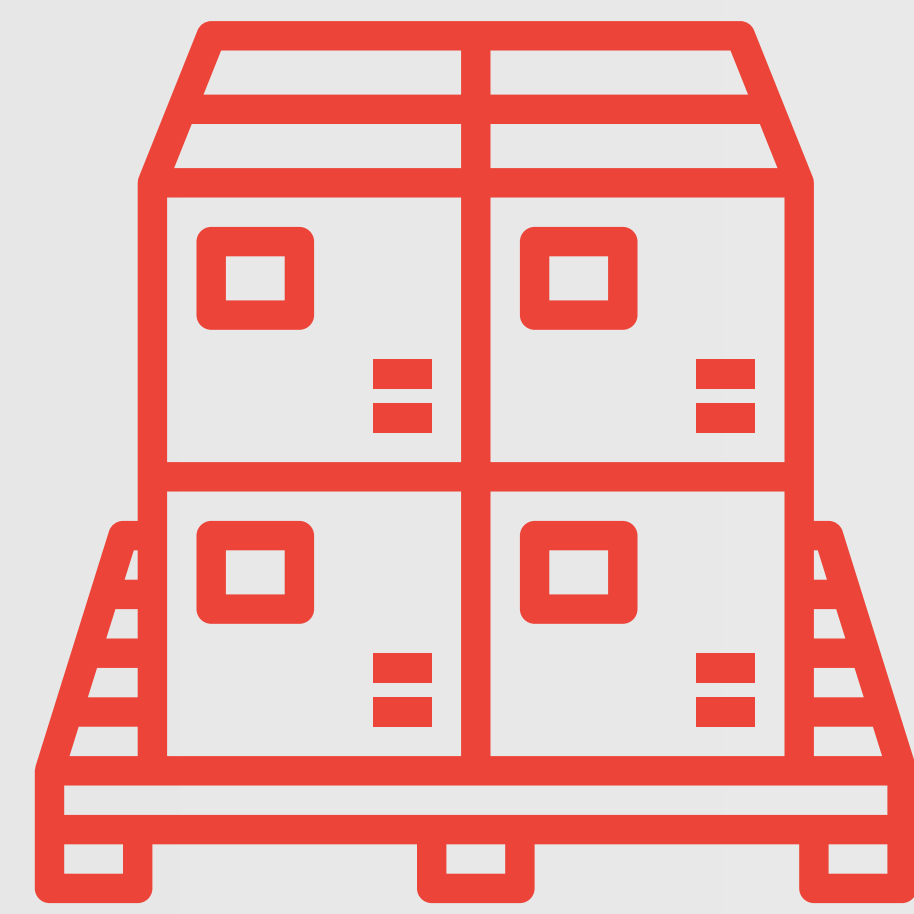

## Load Capacity:

- Turntable Size:  
65" Diameter
- Maximum Load  
Dimensions:  
40" W x 48" L x 110" H
- Maximum Load Height:  
110" Standard
- Maximum Load Weight:  
4400 lbs.



## Film Delivery System

- Multi-Level Variable 100 – 400%
- Containment Force: Variable  
Load Cell
- Film Carriage Motor: ½ HP VAC  
Chain Driven
- Height Sensing: Automatic via  
photocell
- Film threading: patented S-  
Pattern
- Corner Compensation: Load Cell
- Standard Film Width – 20" (30"  
option)



## Performance Criteria

- Production Speed:  
Up to 40 LPH
- Turntable Speed:  
5 – 15 RPM
- Turntable Drive:  
1 HP VAC



## Utility Requirements

- Voltage:  
120V, 12 amps, 60  
Hz, 1 PH
- Air:  
60 PSI
- NEMA 12 Enclosure  
Standard



## Safety Features

- Anti-Fall Device on  
Carriage
- Pressure activated safety  
stop on carriage
- CE Compliant, UL, CUL

**ROBOPACUSA.COM**

**INFO.US@ROBOPAC.COM**

