

Semi-Automatic Stretch Wrapper

COMPACTA SPG

HORIZONTAL STRETCH WRAPPER – SUSPENSION PACKAGING FOR SEMI-FINISHED PRODUCTS



Compacta semi-automatic horizontal rotating ring stretch wrappers are designed for low- to mid-volume production.




ROBOPAC
USA

PERFORMANCE FEATURES:


SPG CONVEYORS

Horizontal motorized roller conveyors: ensure the product's correct entry for optimal wrapping.

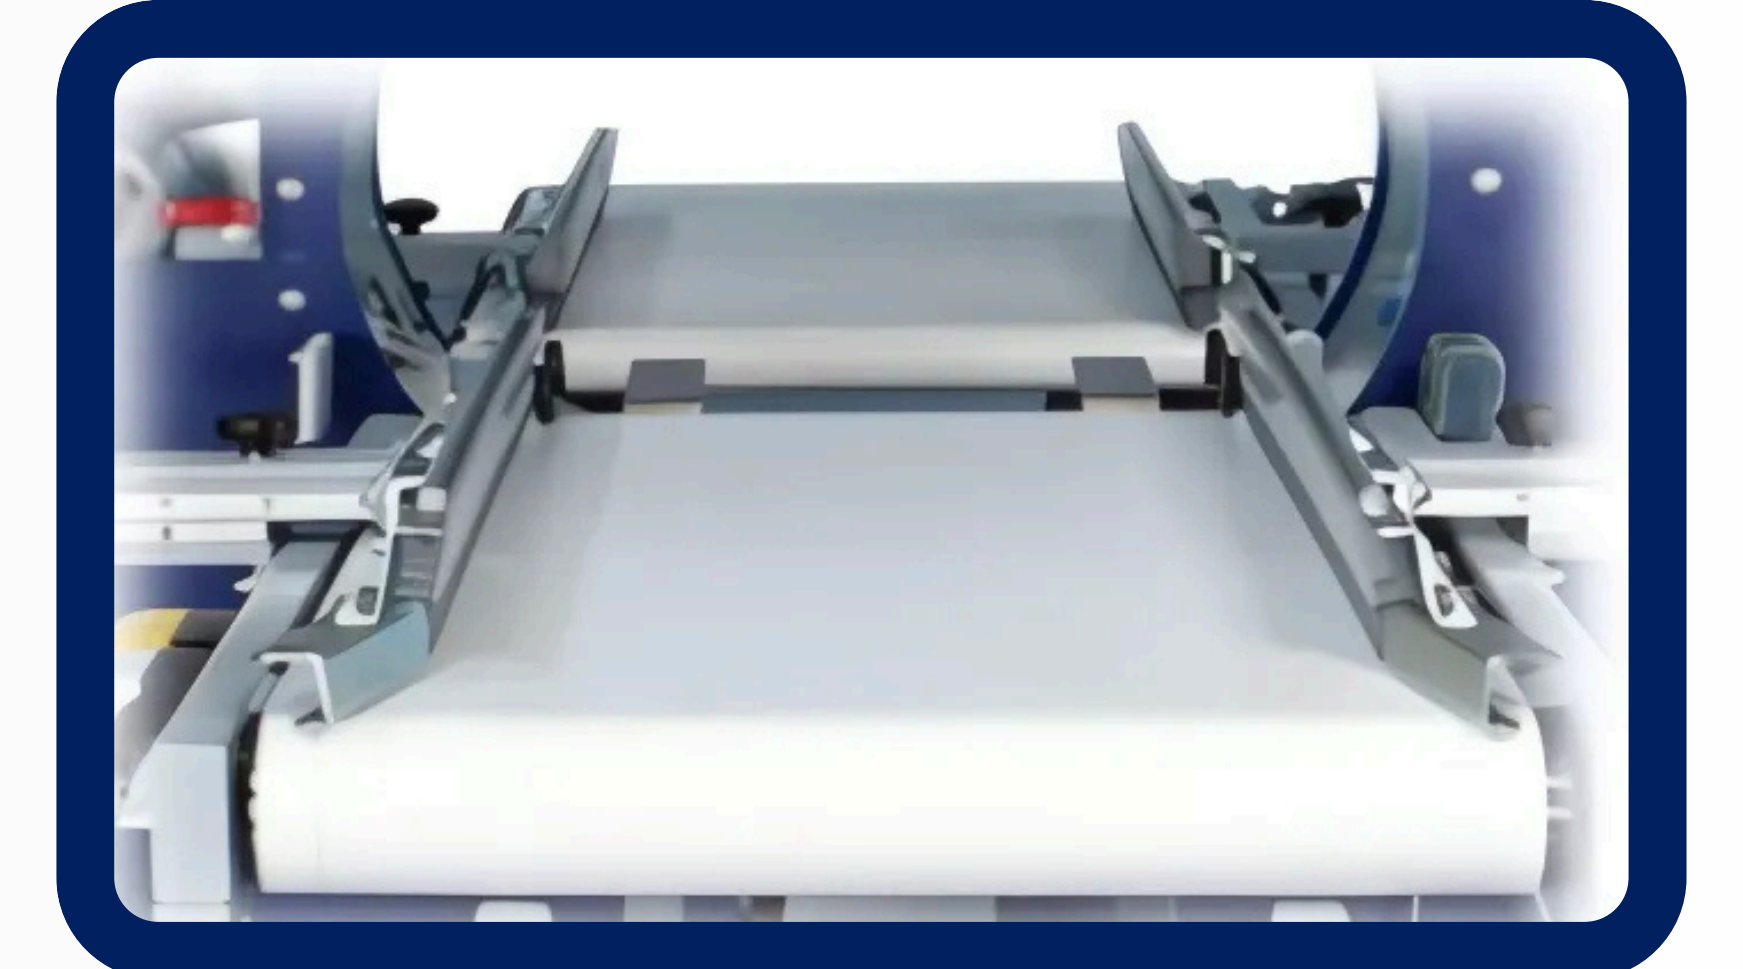

COLOR TOUCH SCREEN

Redesigned control panel includes touch screen. The large color screen allows you to create programs quickly and easily. Upgraded memory can now record up to eight different programs.

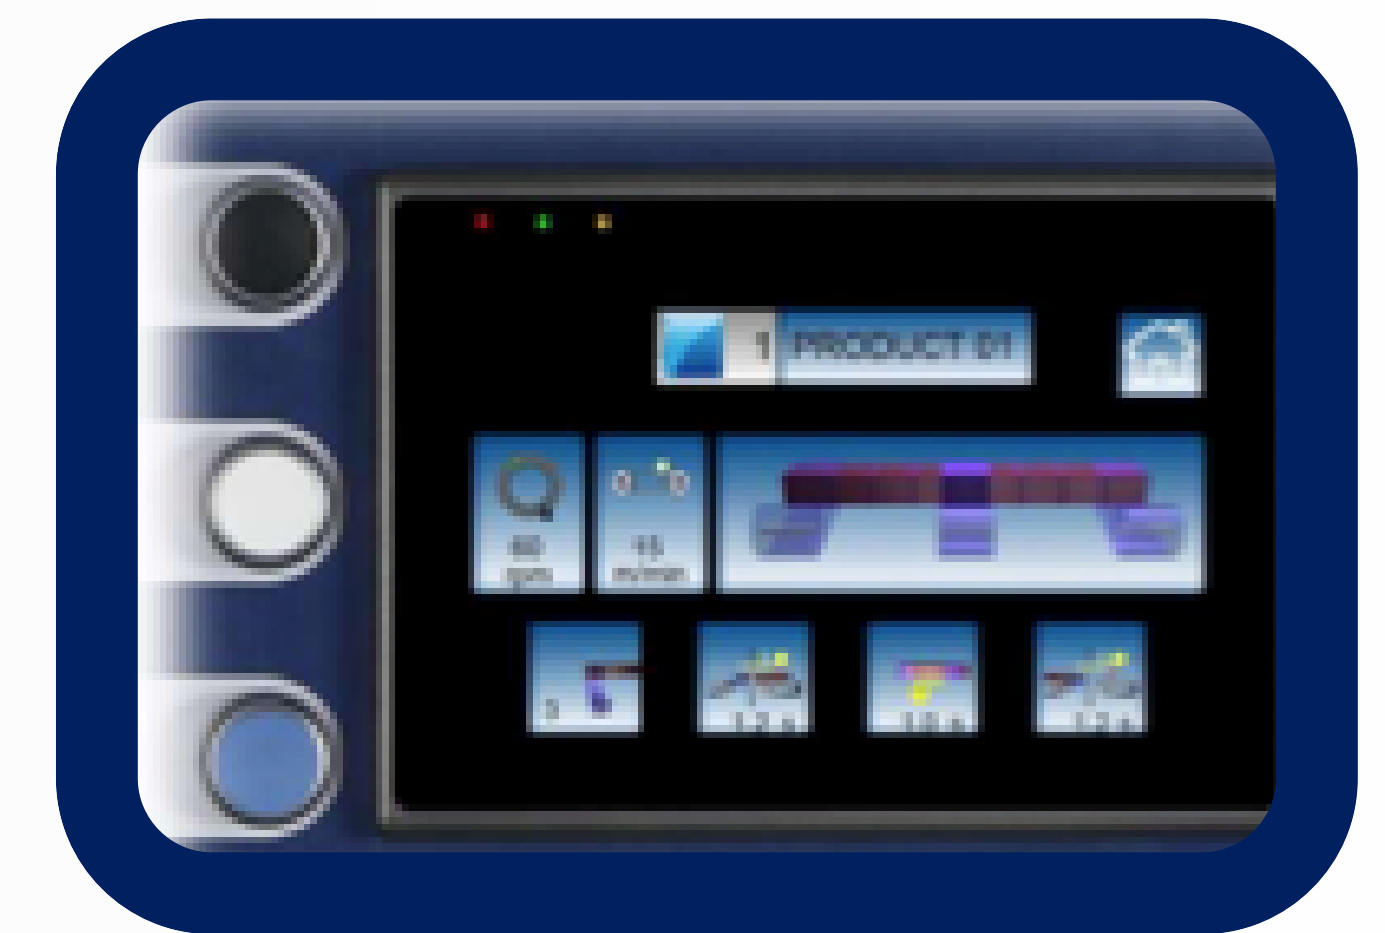

FILM CARRIAGE UNIT

The roll carriage has a direct braking transmission roller and is continuously adjustable. It also simplifies roll loading and film insertion. The roll carriage is equipped with locking and quick release.




CUTTING AND CLAMPING UNIT

The automatic highly reliable dual rod clamping and cutting system fully automates the wrapping process.



THE COMPACTA SUSPENSION PACKAGING GRIP (SPG) HORIZONTAL STRETCH WRAPPER WAS CREATED TO PROVIDE A SAFE AND EFFECTIVE SOLUTION FOR THE PACKAGING OF SEMI-FINISHED PRODUCTS PLACED ON CARDBOARD.

COMPACTA SPG SPEC SHEET

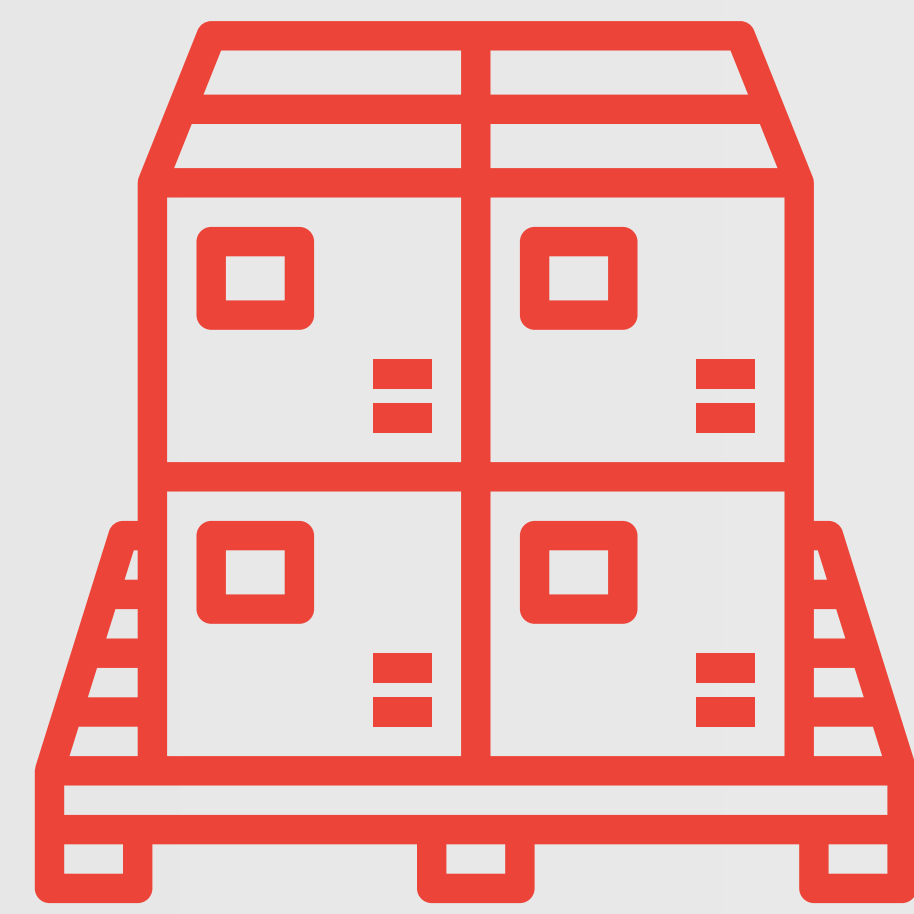

ROBOPACUSA.COM

INFO.US@ROBOPAC.COM

COMPACTA SPR4:

- **Compacta SPG4:**
- **Belt Driven Rotation**
- **Max. Rotation Speed: 160 RPM**
- **Wrapping Cycle: Continuous or Banding**
- **Manual Top Pressure Unit Infeed and Outfeed: Optional**
- **Pneumatic Cold Cutting and Clamping Unit**
- **Friction Roll: Not included**
- **Constant Film Tensioning: Not applicable**
- **Power Supply Voltage: 110V, 1 phase**
- **Installed Power: 1 HP**
- **Working Pressure: 90 PSI**
- **Film Width: 5 inches**
- **Maximum External Diameter: 8 inches**
- **Core Diameter: 3 inches**

- **Dimensions (SPG4):**
- **Length: 90.2 inches**
- **Width: 49.5 inches**
- **Height: 53 inches**
- **Infeed/Outfeed Table Height: 31.5 inches**
- **Infeed/Outfeed Table Width: 12 inches**

COMPACTA SPR6:

- **Compacta SPG6:**
- **Belt Driven Rotation**
- **Max. Rotation Speed: 120 RPM**
- **Wrapping Cycle: Continuous or Banding**
- **Manual Top Pressure Unit Infeed and Outfeed: Optional**
- **Pneumatic Cold Cutting and Clamping Unit**
- **Friction Roll: Included**
- **Constant Film Tensioning: Included**
- **Power Supply Voltage: 110V, 1 phase**
- **Installed Power: 1 HP**
- **Working Pressure: 90 PSI**
- **Film Width: 5 inches**
- **Maximum External Diameter: 8 inches**
- **Core Diameter: 3 inches**

- **Dimensions (SPG6):**
- **Length: 90.2 inches**
- **Width: 57.6 inches**
- **Height: 60.8 inches**
- **Infeed/Outfeed Table Height: 31.5–36.2 inches**
- **Infeed/Outfeed Table Width: 19.7 inches**