

Semi-Automatic Stretch Wrapper

MASTERPLAT

SEMI AUTOMATIC STRETCH WRAPPER




Designed for customers wrapping up to 30 loads per hour. Includes productivity improvement standards like Self-Learning Wrap Program, 110" wrap height and a heavy duty 4,400 pound capacity turntable.

 **STRUCTURAL INTEGRITY – 65" TURNTABLE WITH 28 SUPPORT BEARINGS.**

 **MAXIMUM WEIGHT: 4400 LBS.**

 **STANDARD WRAP HEIGHT: 86" (110" AVAILABLE)**

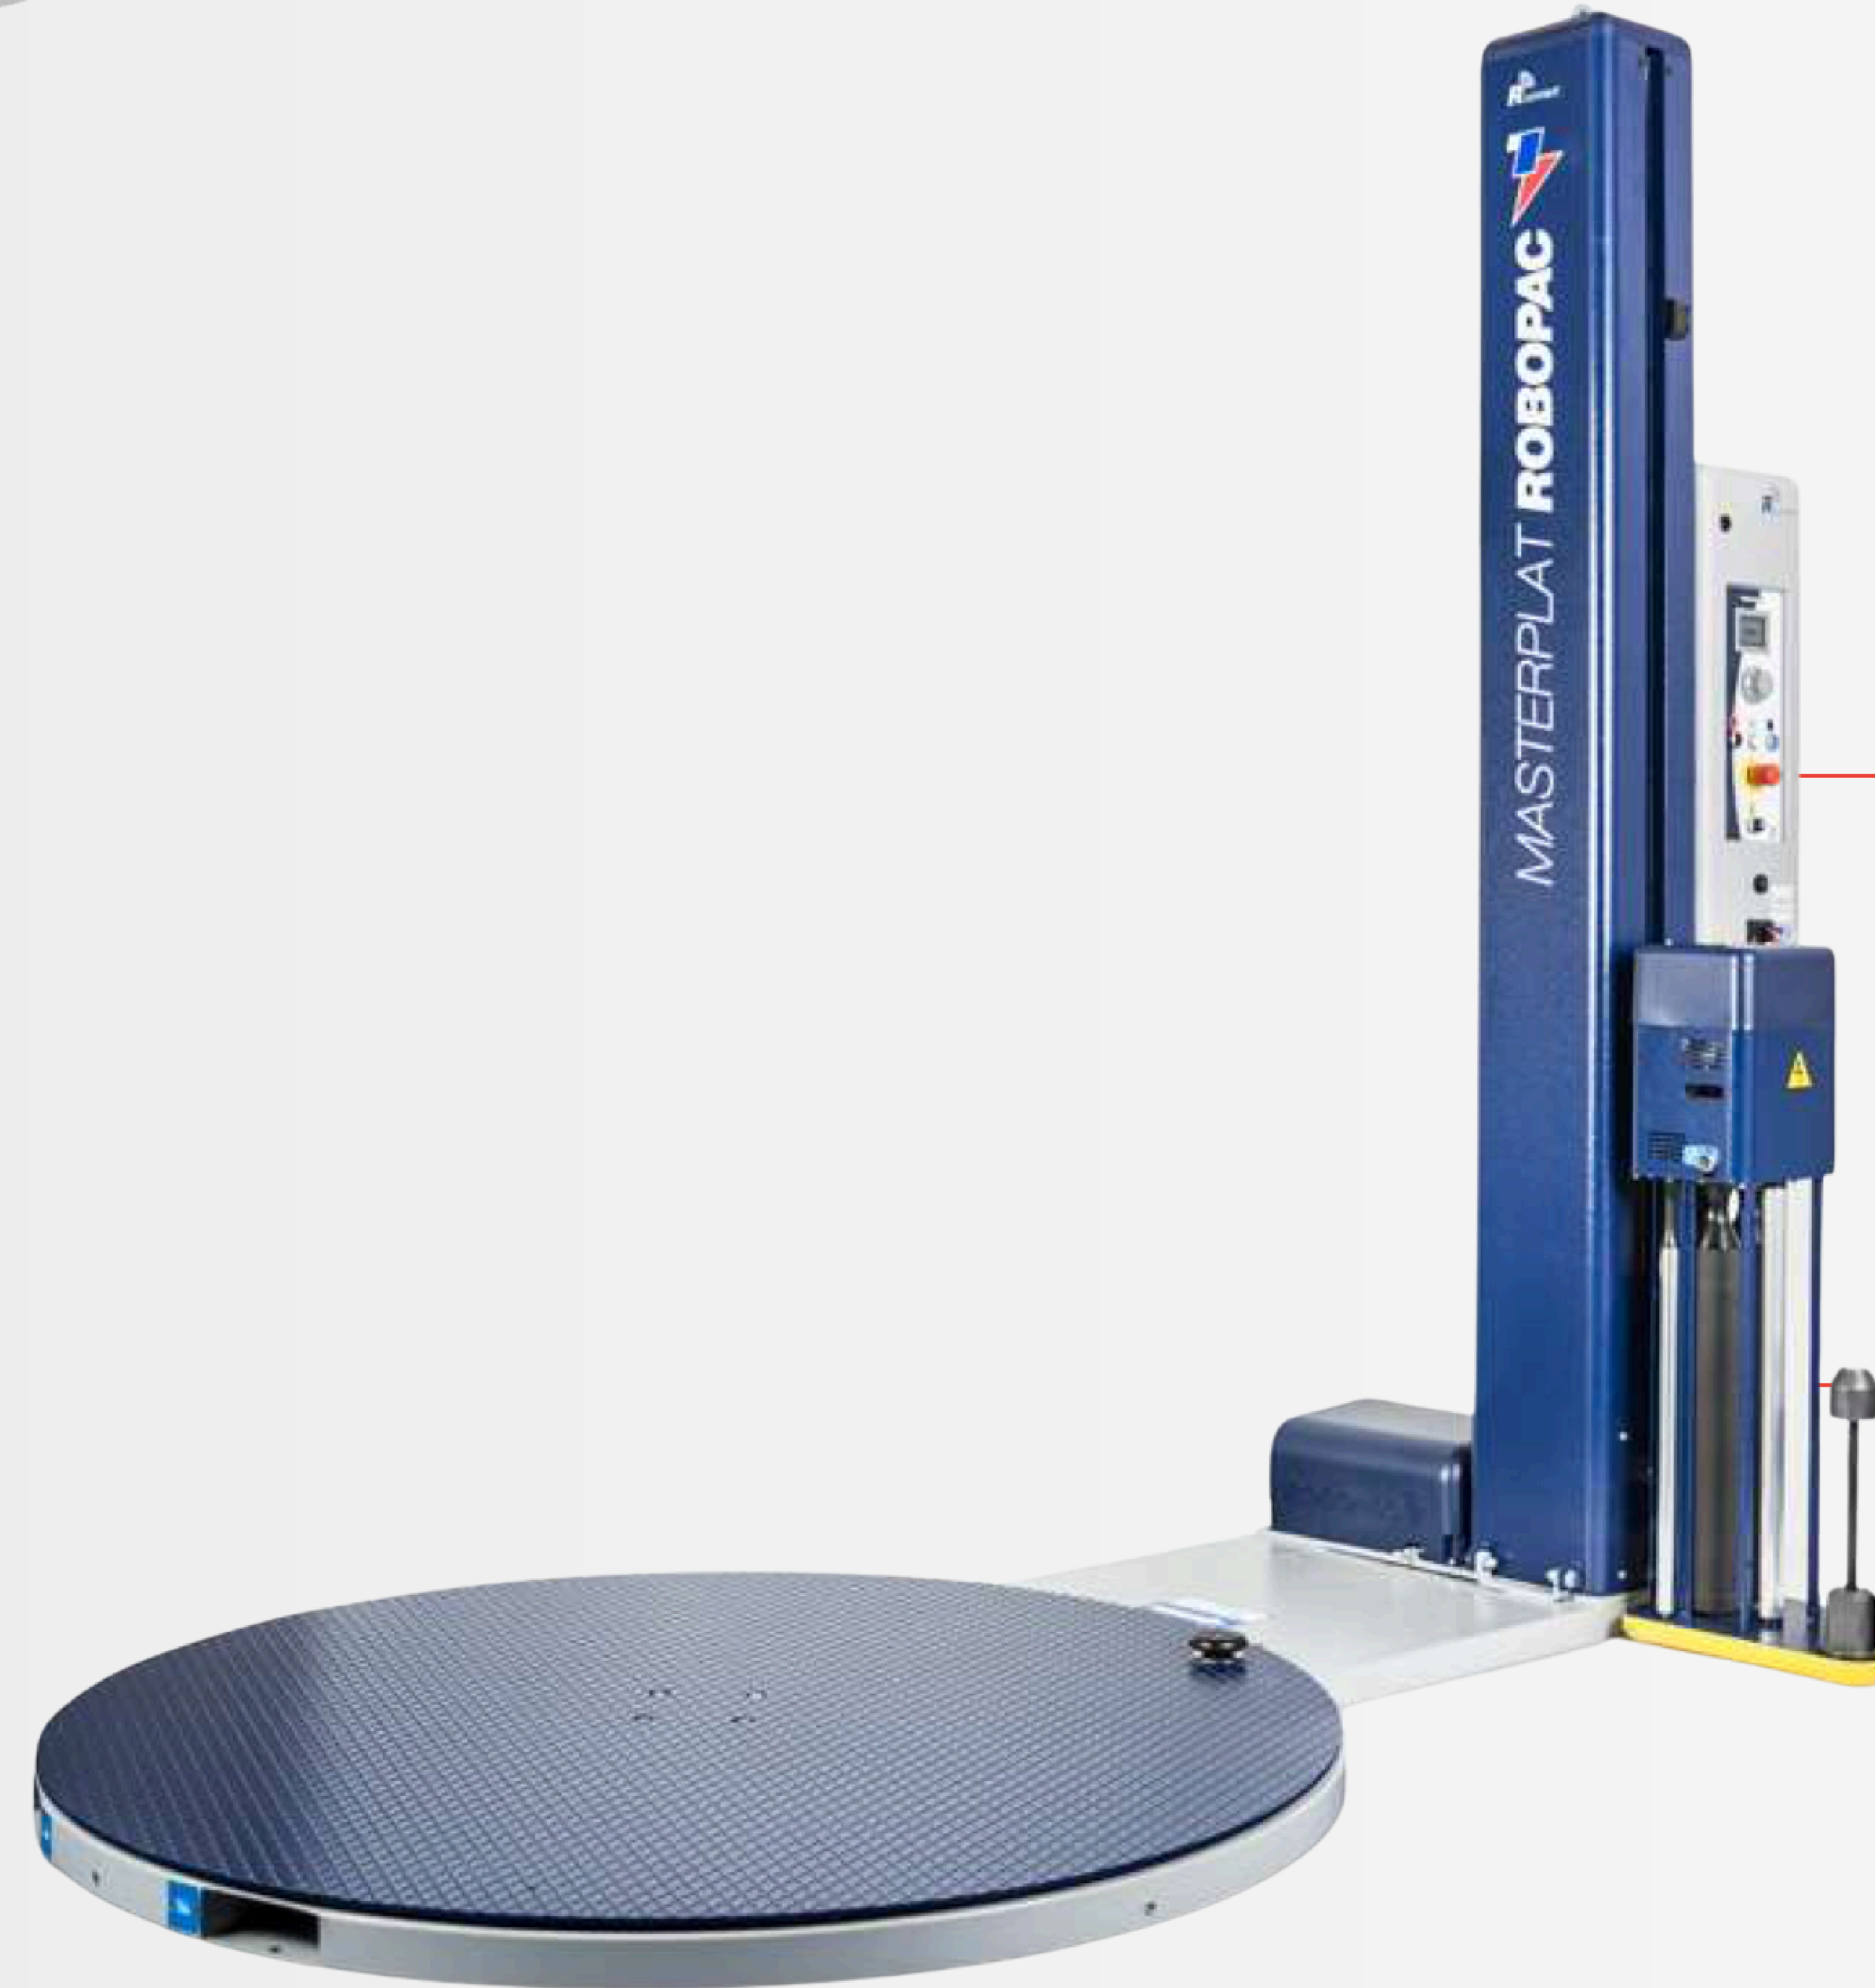

ROBOPAC
USA

PERFORMANCE FEATURES:

CONTROL PANEL

The new control panel combines the Master Jog Dial with graphic display with intuitive icons to make it easy to set up and to select the correct wrapping parameters for each of your loads.




PGS CARRIAGE

The PGS film carriage is fixed gear 250% power pre-stretch and the force to load (tension) is controlled by a strain gauge, adjusted on the control panel.



MASTERPLAT SPEC SHEET

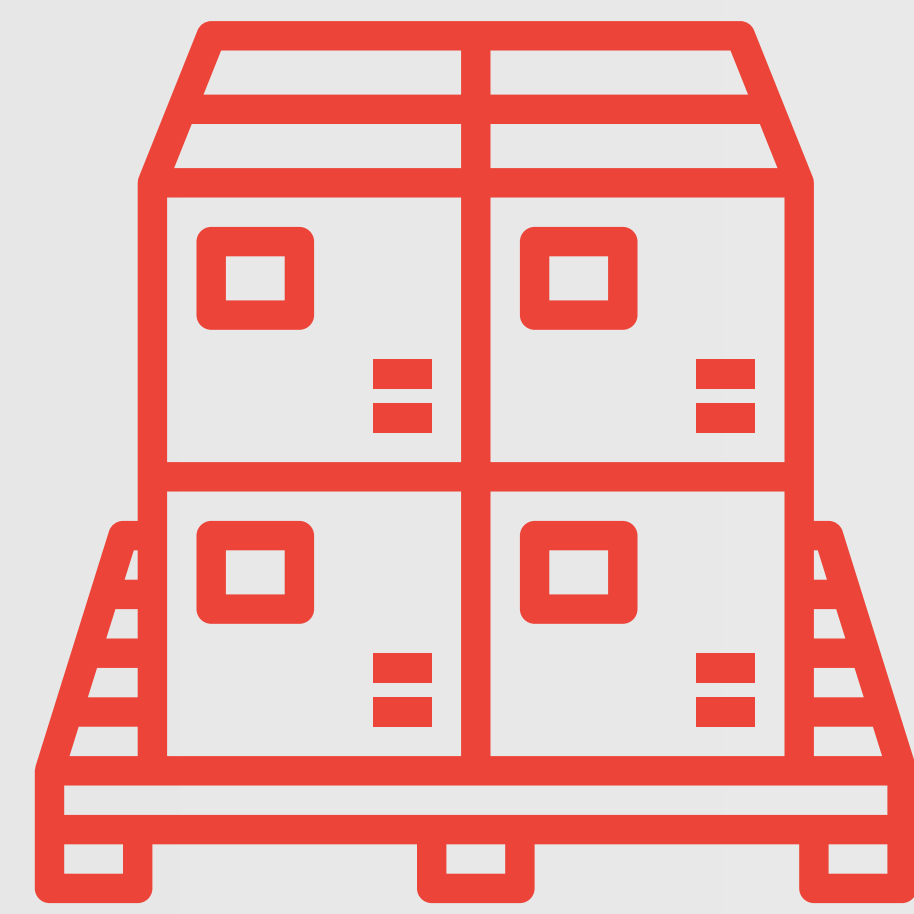

Load Capacity:

- Turntable Size:
65" Diameter
- Maximum Load Height:
86" (110" available)
- Maximum Load Weight:
4400 lbs.



Film Delivery System

- Containment Force: Variable
Electronic
- Film Carriage Motor: ½ HP VAC
- Height Sensing: Automatic via
photocell
- Film Threading: Patented S-
Pattern
- Corner Compensation: Load Cell



Performance Criteria

- Production Speed:
Up to 30 LPH
- Turntable Speed:
5 – 12 RPM
- Turntable Drive:
1 HP VAC



Utility Requirements

- Voltage:
120V, 9.4 amps, 60
Hz, 1 PH



Safety Features

- Anti-fall device on
carriage
- Pressure activated safety
stop on carriage
- CE Compliant, UL, CUL

ROBOPACUSA.COM

INFO.US@ROBOPAC.COM

