



EME serie 1000 er grundstenen i mange etiketteringsløsninger fra EME. Dispenser serien er til stadighed forbedret ud fra mere end 7000 installationer verden over.

Serie 1000 er opbygget i kraftige materialer, primært rustfrit stål og eloxeret aluminium for lang levetid, selv i aggressive miljøer.

Dispenser serien består af 3 modeller: 1-120, 1-200 og 1-250 for maksimale etiketbredder på henholdsvis 120mm, 200mm og 250mm. Modelerne leveres i højre- og venstre-

vendte udgaver for nem integrering i eksisterende produktionslinjer.

Fælles for alle modeller er den specielt udviklede drivmotor på 200W med en enestående trækraft ved alle belastninger.

Fra den selvstændige kontrolkasse der kan placeres i en betjeningsvenlig position, kan variabel dispenserhastighed, impuls-spærring samt etiketplacering indstilles. Alt efter behov kan kontrolkassen udstyres med kontroludstyr.

Til dispenser serien findes et komplet udvalg af beslag, som kan kombineres til enhver monteringsopgave!



Handing ApS™

Nordkranvej 5-9, Vassingerød
DK - 3540 Lynge
Tel.: +45 48160166
www.handing.dk

Etiket maskine EME Model 1120

Dette dokument er vejledende.

Der tages forbehold for fejl.

This document is only guiding.


We make reservation for possible errors.

Copyright © By Handing ApS. All Rights Reserved.


Alle mål i mm.
All measures in mm.

Lager nr. /LH

F1070

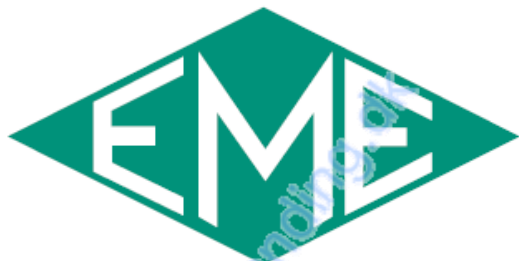

Tekniske specifikationer:

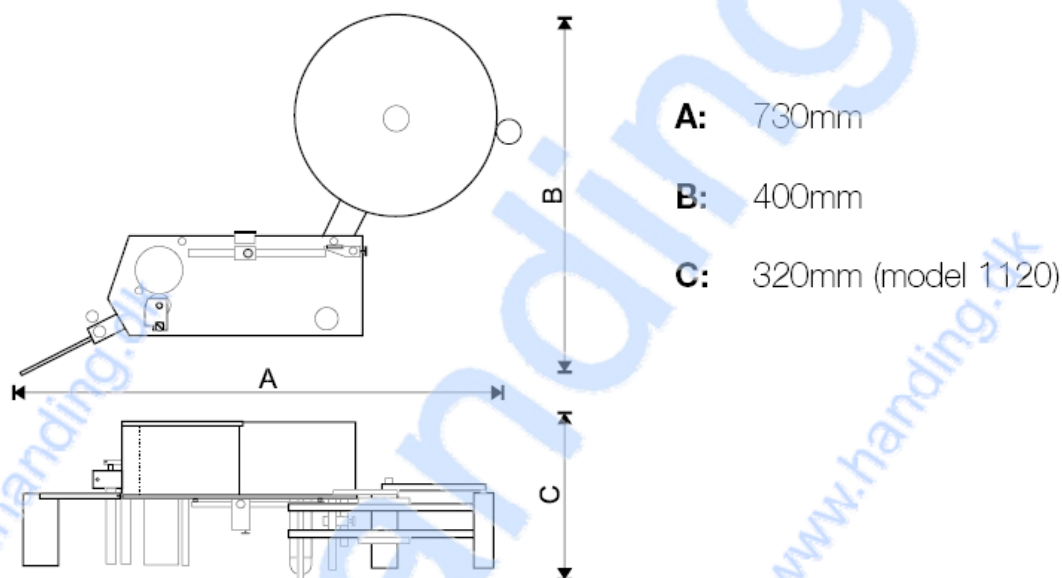

Vægt:
19 kg (model 1120)

Etiketrulle:
Max Ø270mm
Option: Ø400mm

Etiketteringer pr min.:
Max. 300

Etiketlængde:
15-400 mm (uden trykværk)

Drivsystem:
200 W DC-motor
via kobling.

Elforbrug:
250 Watt

Etiketbredde:
15-120 mm (model 1120)

Hastighed:
4-22 M/min.
Option: 36 & 56 M/min.

Standarder:
CE



Handing ApS™
Nordkranvej 5-9, Vassingerød
DK - 3540 Lyngø
Tel.: +45 48160166
www.handing.dk

Etiket maskine EME Model 1120

Dette dokument er vejledende.
Der tages forbehold for fejl.
This document is only guiding.
We make reservation for possible errors.
Copyright © By Handing ApS. All Rights Reserved.

Alle mål i mm.
All measures in mm.

Lager nr. /LH

F1070



3-roller system for high quality results

The 3-roller method of labelling is the optimal way to get a perfect label position on the product, when the label needs to go around a cylindrical container.

The container is stopped and held between 3 rollers, rotated and then labelled. This ensures that the container is standing vertical straight, while the label is applied. The result is, that the label is sitting horizontal all around the circumference.

This method allows also to place the label in an orientated position to a reference

point on the container. This labelling technique can be integrated in many configurations, covering various demands.

A large number of options can be supplied in a system:

- Orientation by mark reader
- Orientation by vision system
- Print on label; Batch, Date, etc.
- Vision control of the printing
- Transparent label detection
- Barcode scanner
- Counters
- Missing label control
- Warning signals

Specifications and accessories:

Model 4-120

Label web width, maximum:	120mm.
Label web width, minimum:	20mm.
Label length, maximum:	250mm.
Label length, minimum:	20mm.
Variable speed:	0-40m/min.
Label roll diameter, standard:	Ø270mm.
Label roll diameter, option:	Ø310mm.
Label roll diameter, standard:	Ø270mm.
Label roll core, minimum:	40mm.
Label roll core, option:	76mm.
Stepper motor with microstep:	Yes
Microprocessor with keyboard:	Yes
Illuminated display:	Yes
Internal memory capacity:	25



Handing ApS™

Nordkranvej 5-9, Vassingerød
DK - 3540 Lyngø
Tel.: +45 48160166
www.handing.dk

Etiket maskine EME Model 1120

Dette dokument er vejledende.
Der tages forbehold for fejl.
This document is only guiding.
We make reservation for possible errors.

Copyright © By Handing ApS. All Rights Reserved.

Alle mål i mm.
All measures in mm.

Lager nr. /LH

F1070