



Q [l/h]

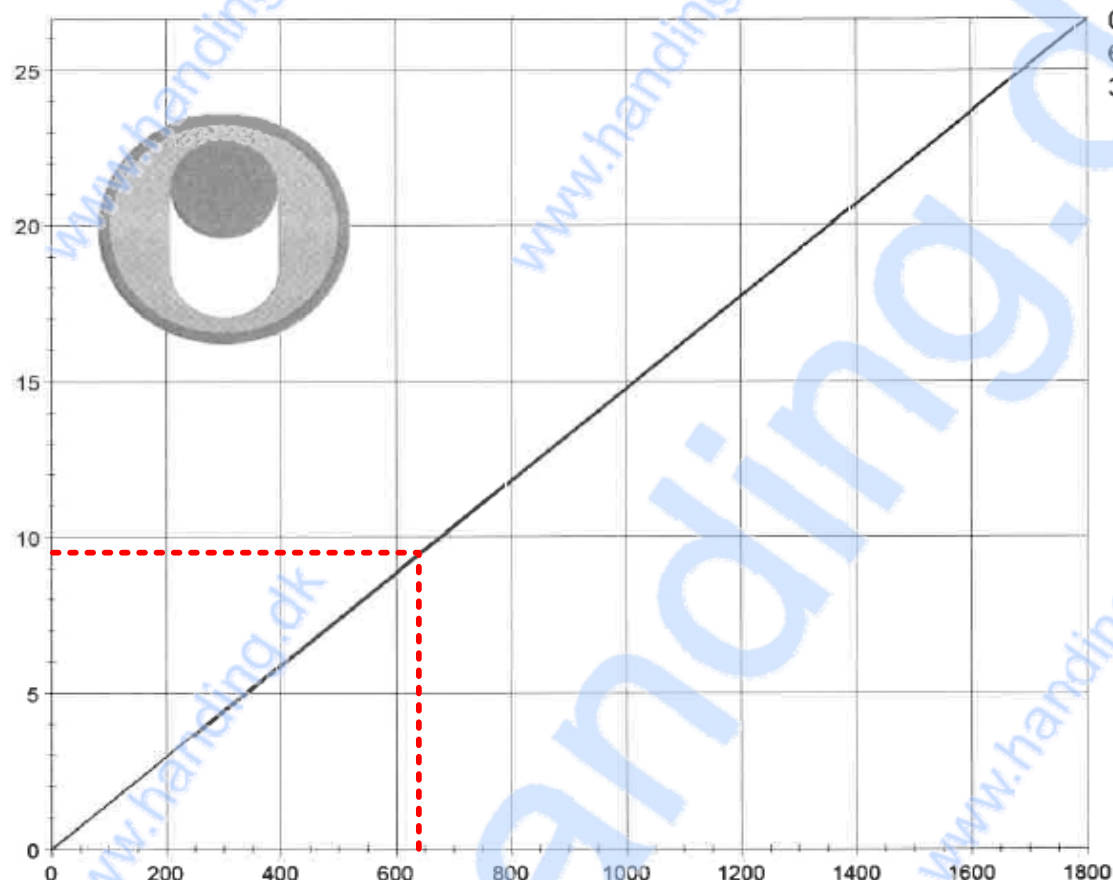

0 bar
6 bar
36 bar

n [1/min]

P [kW]

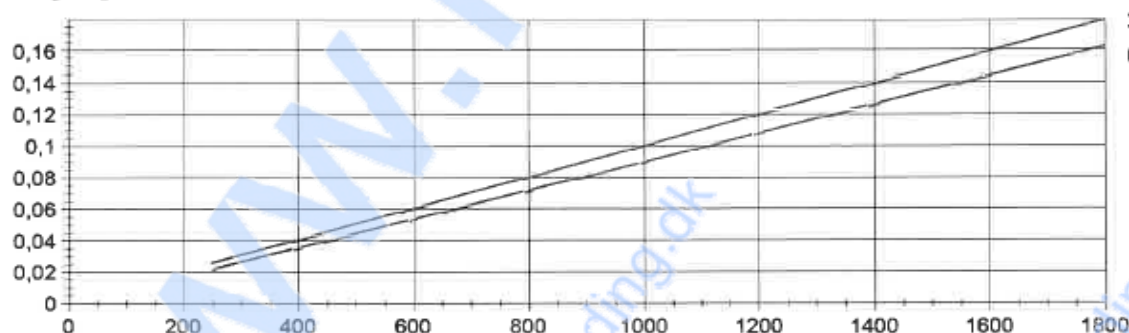

36 bar
6 bar

n [1/min]

Losbrechmoment / starting torque T(L) = 0,9 Nm

Druck / pressure	T
0 bar	0 Nm
6 bar	0,86 Nm
36 bar	0,95 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 Toleranzgruppe II.

Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 tolerance group II.

Rev.: 03/2007 Technische Änderungen vorbehalten. / Technical changes reserved.

www.netzsch-pumpen.de



Handing ApS™
Nordkranvej 5-9, Vassingerød
DK - 3540 Lyngbe
Tel.: +45 48160166
www.handing.dk

Netzsch NM005BH06S12F

Dette dokument er vejledende.

Der tages forbehold for fejl.

This document is only guiding.

We make reservation for possible errors.

Copyright © By Handing ApS. All Rights Reserved.

Alle mål i mm.
All measures in mm.

Lager nr. /TN

PM1057