





print finishing machines

ZD-2SR

stitching machine

Over
10,000
Machines sold
throughout
the World

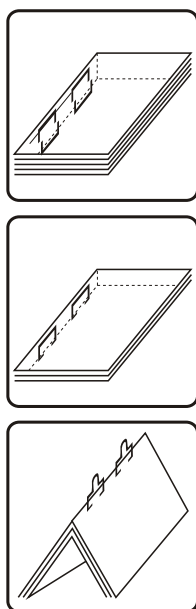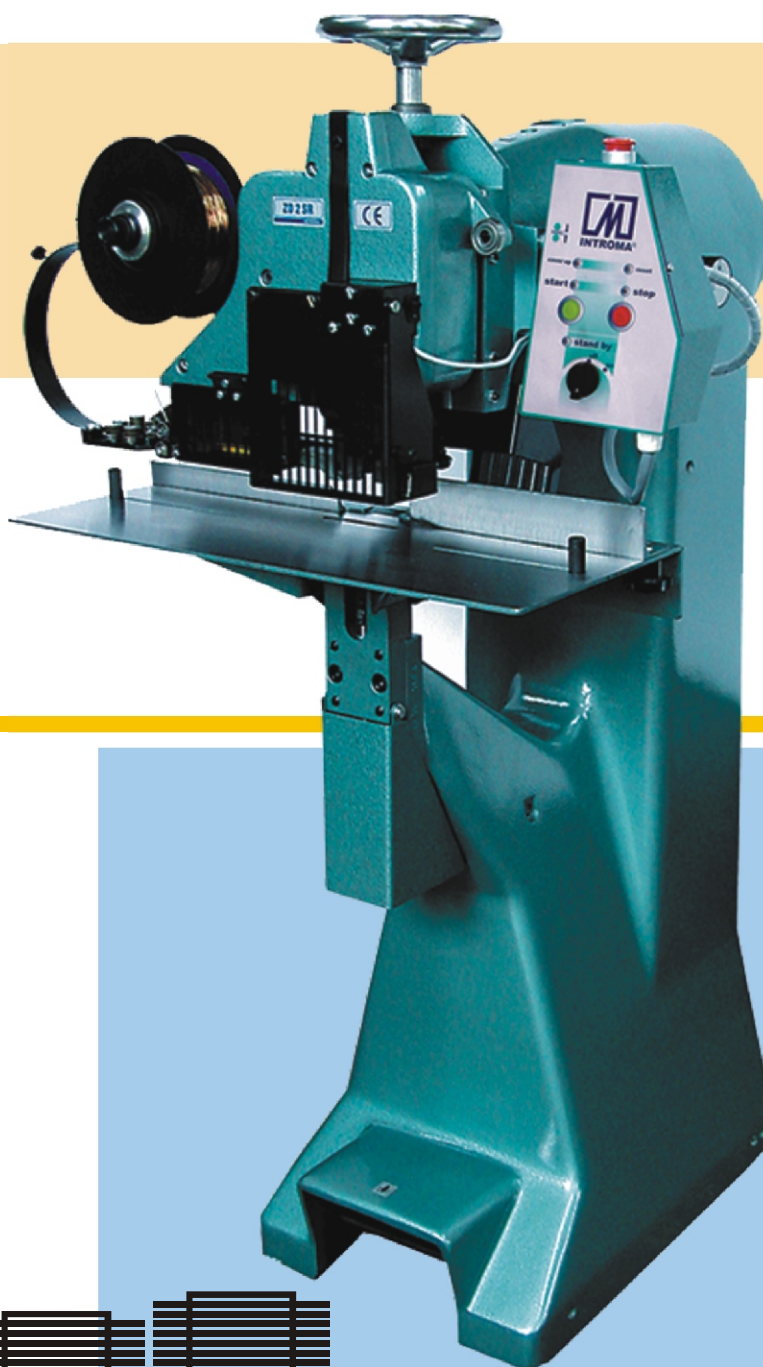


"INTROMA" - Poland, 90-019 Łódź, Dowborczykow str. 12
Sales; tel. 04842/ 636 60 58, fax 04842/ 633 80 01
e-mail: introma@introma.com.pl www.introma.com.pl

ZD-2SR *stitching machine*


The latest model based
on Manufacturer's 45
years experience




Protective shields

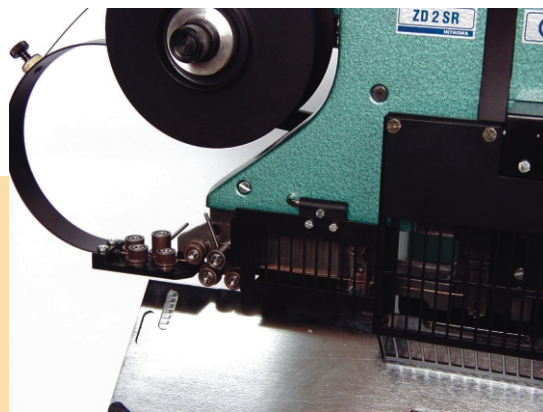

Protective shields

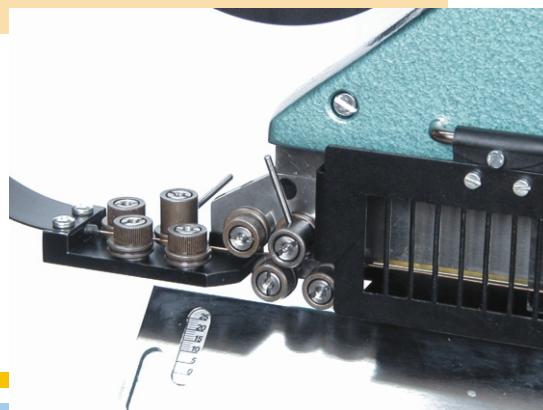

Wire feeding system

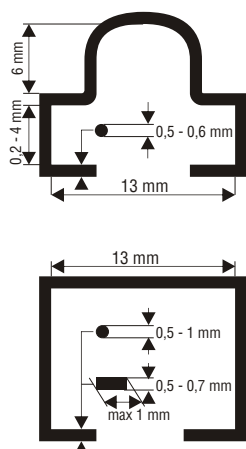

Type of staple	Loop (Omega) and Standard
Productivity	up to 180 staples per minute
Flat stitching	from two sheets up to 25 mm
Stabbing	from two sheets up to 40 mm
Saddle stitching	from two sheets up to 8 mm
Diameter of wire	0,5 - 1,0 mm
Internal width of staple	13 mm
Wire consumption per staple	25 - 73 mm
Power requirement	0,4 kW
Power supply	400 V-three phases or 230 V one phase
Frequency	50 or 60 Hz
Lighting and control voltage	24 V
Dimensions	700 x 720 x 1245 mm
Height of the table	820 mm
Single cycles or continuous stitching operation	Yes
overload, ground-fault and undervoltage protection	Yes
protection shield coupled with electric control system	Yes
Weight	230 kg
Gross weight	280 kg
Dimensions of packaging	80 x 140 x 85 cm

"INTROMA" - Poland, 90-019 Łódź, Dowborczykow str. 12
Sales; tel. 04842/ 636 60 58, fax 04842/ 633 80 01
e-mail: introma@introma.com.pl www.introma.com.pl