

HD 17/15-4 ST

Stationary high-pressure cleaner with cover and frame made of powder-coated steel. Impresses with high flow volume (1,700 l/h), high-quality equipment and high operational safety.



Order no. 1.524-965.0

- 4-pole water-cooled motor and robust crankshaft pump with ceramic piston
- Easy installation, operation and maintenance of the machine

Technical data

EAN code		4066529057167
Number of current phases	Ph	3
Voltage	V	400
Frequency	Hz	50
Flow rate	l/h	900 - 1700
Working pressure	bar / MPa	100 - 150 / 10 - 15
Max. pressure	bar / MPa	210 / 21
Inlet temperature	°C	60
Connected load	kW	9
Protection	A	16
Power cable	m	5
Water inlet		1"
Number of users		2
Portability		stationary
Weight (with accessories)	kg	84
Weight incl. packaging	kg	93.8
Dimensions (L × W × H)	mm	800 × 605 × 600


This machine requires instruction.

Scope of supply

- Servo Control
- Power nozzle
- Frame and cover: Steel, powder-coated
- Prepared for Servo Control
- Pre-equipped for a detergent inlet

Equipment

- Crankshaft pump with ceramic pistons
- Dry-running protection
- Large water fine filter
- Storage tank with float valve
- Prepared for remote operation
- RM1 dosage
- Sight glass for oil level
- Oil dipstick
- Water-cooled motor

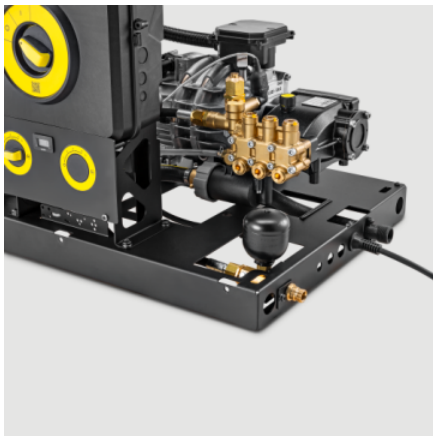

Durable and robust

- Robust frame and cover made of powder-coated steel.
- 4-pole, slow-running electric motor guarantees a long working time.
- Robust crankshaft pump with brass cylinder head and high-quality materials ensure a long service life.



High-quality equipment


- Storage tank with float valve and dry-running protection.
- Ready for connection of remote controls.



Robust design for harsh working conditions

- Suitable for daily use.
- Can be used under tough working conditions.
- 15 kW Kärcher crankshaft pump


ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0

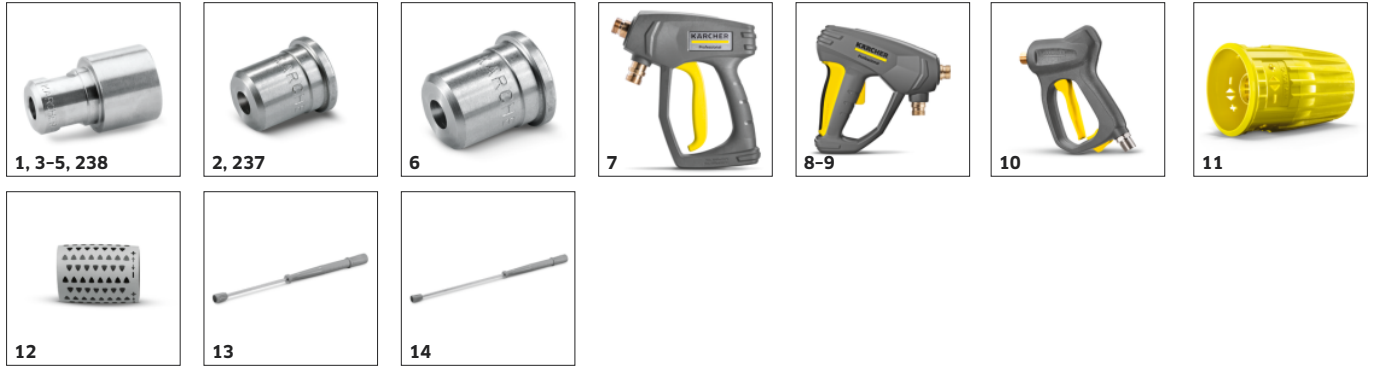

		Order no.	Description	
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 25°				
Power nozzle TR 25105 25°	1	2.113-082.0	Flat jet nozzle for high area performance and stubborn dirt.	■
Power nozzle 25°, 110	2	2.883-785.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	☐
	3	2.113-018.0		☐
Power nozzle 25°, 115	4	2.113-060.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains.	☐
HP nozzle spray angle 0°				
Power nozzle 0°, 110	5	2.113-039.0	Solid jet for very stubborn dirt and stains.	☐
	6	2.884-544.0		☐
TRIGGER GUNS				
Spray guns				
Pistol TR 155°C with package	7	4.119-002.0	Classic spray gun with valve. Also suitable for Kärcher hot water high-pressure cleaners.	☐
EASY!Force Advanced	8	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	☐
EASY!Force Food	9	4.118-015.0	Perfect for the food industry: the EASY!Force high-pressure gun with full ceramic valve enables fatigueless working due to virtually zero holding force for the operator.	☐
High-End HD Trigger Gun	10	4.118-011.0	Trigger gun for professional use in the food industry and general industrial applications. Designed for water flow rates of up to 2500 l/h.	☐
Servo control				
Servo Control, 1100 l/h -	11	4.118-009.0	Water quantity and pressure regulated directly from the hand spray gun.	☐
	12	4.775-471.0		☐
SPRAY LANCES				
Rotating spray lances				
Jet pipe with transport packaging, 840 mm	13	4.119-003.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Spray lance Classic EASY!Lock, 1050 mm	14	4.119-008.0	High-pressure spray lance with EASY!Lock screw connections from the Classic series from Kärcher. Also suitable for Kärcher hot water high-pressure cleaners.	☐

■ Included in the scope of supply. ☐ Available accessories.


ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0

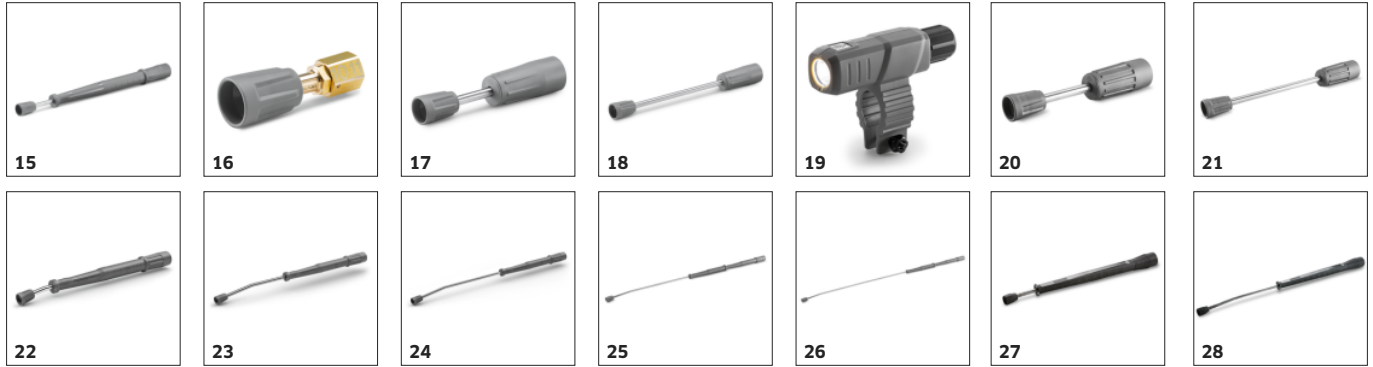

		Order no.	Description	
SPRAY LANCES				
Rotating spray lances				
Jet pipe TR 600mm with package, 600 mm	15	4.119-009.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe Classic TR 100mm, 100 mm	16	4.119-013.0		☐
Jet pipe Classic TR 200mm, 200 mm	17	4.119-014.0		☐
Jet pipe Classic TR 400mm, 400 mm	18	4.119-015.0		☐
LED nozzle light	19	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	☐
Spray lance, 250 mm, rotatable	20	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	☐
Spray lance, 400 mm, rotatable	21	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	☐
Spray lance, 600 mm, rotatable	22	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	23	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1050 mm, rotatable	24	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1550 mm, rotatable	25	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	26	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 600 mm, rotatable	27	4.760-664.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	28	4.760-663.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0

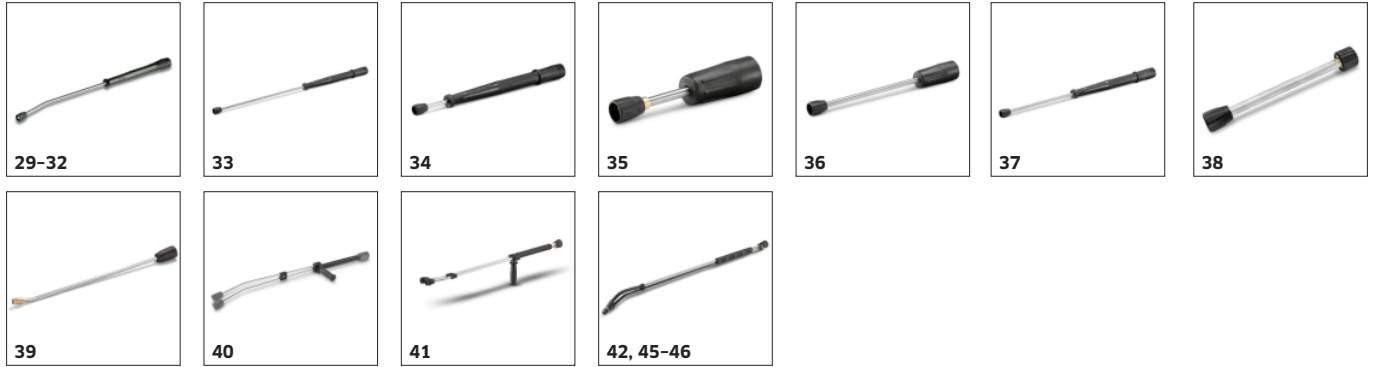

		Order no.	Description	
SPRAY LANCES				
Rotating spray lances				
Spray lance, 1050 mm, rotatable	29	4.760-660.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1550 mm, rotatable	30	4.760-661.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	31	4.760-662.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance food, 1050 mm, rotatable	32	4.760-655.0	1050 mm grey, rotatable food-grade lance for use in the food industry. All parts coming into contact with water are food safe.	☐
Spray lance				
Spray lance Classic 1,050 mm	33	4.760-855.0	High-pressure spray lance with M 22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Jet pipe 600mm with package	34	4.760-856.0		☐
Jet pipe Classic M 200mm	35	4.760-887.0		☐
Jet pipe Classic M 400mm	36	4.760-888.0		☐
Jet pipe Classic M 840mm	37	4.760-895.0		☐
250 mm lance, non-rotatable	38	4.760-667.0	250 mm stainless steel lance. With manual coupling. Non-rotatable.	☐
550 mm lance, non-rotatable	39	4.760-665.0	550 mm stainless steel lance. With manual coupling. Non-rotatable.	☐
Double lance				
Double lance, 960 mm	40	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	☐
	41	6.394-665.0		☐
Flexible spray lance				
Flexible lance, 1050 mm	42	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0



		Order no.	Description	
SPRAY LANCES				
Flexible spray lance				
High pressure articulated joint	43	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	☐
	44	4.481-039.0	High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer.	☐
Jet pipe flexible 0,85m, 850 mm	45	6.394-655.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	☐
Flexible lance, 1050 mm	46	6.394-654.0		☐
Undercarriage spray lance				
Underbody lance	47	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	☐
	48	4.760-245.0		☐
Additional handle				
Additional handle for EASY!Lock spray lances	49	4.321-380.0	Comfortable in every situation - the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task. Regularly changing your posture relieves the strain on your body, making work more relaxed. Thanks to the 360°-rotatable spray lance, the additional handle can simply be fully rotated whilst working for greater flexibility.	☐
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt blaster, large				
Dirt blaster, 100	50	4.764-208.0	Dirt blaster - rotating point jet - 10 times the cleaning performance. Maximum working time thanks to ceramic nozzle/bearing ring. Max. 300 bar / 30 MPa, 85 °C.	☐
Dirt blaster, large, 100	51	4.114-048.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	☐
Dirt blaster, 120	52	4.763-930.0		☐
Dirt blaster, large, 120	53	4.114-044.0		☐
NOZZLE UNION / SPACER				
Nozzle union				
Nozzle screws	54	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	☐
Nozzle connector	55	5.401-210.0	For protecting and connecting Kärcher power nozzles to spray lances (M 18 × 1.5 IG).	☐
Nozzle union food industry	56	5.401-318.0	Made of special brass alloy for use in the food industry.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0



57



58, 72, 74, 76



59-61



62, 64, 70



63, 65, 67, 69



66, 68, 71

		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard				
High-pressure hose, 20 m, ID 8, 315 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	57	6.110-011.0	High-pressure hose with AVS hose reel connection and EASY!Lock hand screw connection.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	58	6.110-019.0	High-pressure hose (DN 8) with EASY!Lock manual screw fitting on both sides. Suitable for pressures up to 315 bar. Length: 10 m.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	59	6.390-025.0	10 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	60	6.390-185.0	15 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	61	6.390-171.0	20 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
Standard with unions on both sides				
High-pressure hose, 10 m, ID 10, 220 bar, 2 × EASY!Lock	62	6.110-041.0	Impressive values and basic equipment: 10 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	63	6.110-031.0	High-pressure hose (DN 8) suitable up to 315 bar pressure. With innovative EASY!Lock manual screw fitting on both sides, ANTI!Twist and 10 m long.	☐
High-pressure hose, 15 m, ID 8, 315 bar	64	6.110-033.0	15 m high-pressure hose, DN 8, fitted with EASY!Lock manual screw connections at both ends.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 2 × EASY!Lock	65	6.110-030.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose, 15 m, ID 10, 220 bar, 2 × M22 × 1.5	66	6.390-023.0	Connectors at both ends, M 22 × 1.5, with kink protection.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 2 × EASY!Lock	67	6.110-032.0	High-pressure hose (DN 8) with a length of 20 m and EASY!Lock manual screw fitting on both sides. Approved for max. 315 bar pressure.	☐
High-pressure hose, 20 m, ID 10, 220 bar, 2 × M22 × 1.5	68	6.390-726.0	with union on both sides, M 22 × 1.5 with anti-kink protection. NW 10/155°C/220 bar	☐
High-pressure hose, 30 m, ID 8, 315 bar, 2 × EASY!Lock	69	6.110-014.0	Comfortable length (30 m) and innovative EASY!Lock manual screw fitting: High-pressure hose (DN 8) with ANTI!Twist for pressures up to 315 bar.	☐
High-pressure hose, 15 m, ID 10, 220 bar, 2 × EASY!Lock	70	6.110-042.0	Equipped with innovative EASY!Lock manual screw fitting and suitable for pressures up to 220 bar: 15 m long high-pressure hose (DN 10).	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST

1.524-965.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
High-pressure hose, 20 m, ID 10, 220 bar, 2 × EASY!Lock	71	6.110-043.0	20 m in length and the extremely time-saving and comfortable EASY!Lock manual screw fitting on both sides are some of the main features of this high-pressure hose (DN 10).	☐
High-pressure hose, 25 m, ID 10, 220 bar, 2 × EASY!Lock	72	6.110-044.0	Impressive values and basic equipment: 25 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.	☐
High-pressure hose, 40 m, ID 12, 210 bar, 2 × M22 × 1.5	73	6.391-865.0	High-pressure hose for water volumes greater than 1,800 l / h. With union on both sides. 2x M 22 × 1.5 with anti-kink protection.	☐
High-pressure hose, 40 m, ID 10, 220 bar, 2 × EASY!Lock	74	6.110-045.0	40 m long high-pressure hose with EASY!Lock system for the time-saving manual screw connection (both sides). Nominal size (DN) 10, working pressure up to 220 bar.	☐
High-pressure hose, 15 m, ID 12, 210 bar, 2 × EASY!Lock	75	6.110-059.0	Designed for working pressures up to 250 bar: High-pressure hose (DN 12) with a length of 15 m. Has the comfortable EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose, 40 m, ID 12, 210 bar, 2 × EASY!Lock	76	6.110-060.0	With EASY!Lock manual screw fitting and lots of room for manoeuvre thanks to 40 m in length: High-pressure hose (DN 12) with EASY!Lock manual screw fitting on both sides. Suitable for working pressures up to 250 bar.	☐
Longlife 400				
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	77	6.110-028.0	20 m high-pressure hose (ID 8), for up to 400 bar pressure. With AVS hose reel connection and double steel reinforcement. EASY!Lock hand screw connection at other end of the hose.	☐
High-pressure hose Longlife, 40 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	78	6.110-076.0	High-pressure hose with 2-compartment steel insert, AVS hose reel connection, as well as EASY!Lock manual screw connection.	☐
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × EASY!Lock	79	6.110-024.0	1.5 m high-pressure hose (DN 8) with EASY!Lock manual screw fitting on both sides. Designed for max. 400 bar pressure.	☐
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	80	6.110-069.0	1.5 m long high-pressure hose (DN 8) suitable for up to 400 bar pressure with double steel core. Connections: M 22 × 1.5, as well as the comfortable and quick EASY!Lock manual screw fitting.	☐
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × M22 × 1.5	81	6.390-178.0	1.5 m high-pressure hose (DN 8, M 22 × 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 × 1.5).	☐
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	82	6.110-038.0	10 m long high-pressure hose (DN 8) with double steel core, EASY!Lock manual screw fitting on both sides, and ANTI!Twist. Approved for max. 400 bar pressure.	☐
High-pressure hose Longlife, 30 m, ID 8, 400 bar, 2 × EASY!Lock	83	6.110-023.0	High-pressure hose with double steel core, ANTI!Twist and EASY!Lock manual screw fitting on both sides. Nominal size DN 8, 30 m long, approved for max. 400 bar pressure.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	84	6.110-027.0	High-pressure hose with ANTI!Twist, EASY!Lock manual screw fittings and double steel core. 20 m long, nominal size DN 8, EASY!Lock manual screw fitting on both sides.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST


1.524-965.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 15 m, ID 8, 400 bar, 2 × EASY!Lock	85	6.110-029.0	The double steel core ensures a particularly long life of this 15 m long high-pressure hose (DN 8), which is approved for pressures up to 400 bar.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × M22 × 1.5	86	6.390-027.0	with rotary coupling, 2 × M 22 × 1.5	☐
Food industry version				
High-pressure hose food grade, 15 m, ID 6, 250 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	87	6.110-074.0	15 m long high-pressure hose (ID 6), food grade, with AVS hose reel connection, EASY!Lock hand screw connection and grey, non-marking outer covering.	☐
High-pressure hose food grade, 15 m, ID 6, 250 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	88	6.391-654.0	15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.	☐
Food industry version with unions on both sides				
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × EASY!Lock	89	6.110-051.0	High-pressure hose (ID 6), 10 m long, with grey, non-marking outer covering. Approved for use in the food industry. With EASY!Lock hand screw connection at both ends.	☐
High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × EASY!Lock	90	6.110-052.0	Suitable for use in food industry: 20 m long high-pressure hose (ID 8) with grey, non-marking outer covering, ANTI!Twist and EASY!Lock hand screw connections.	☐
Longlife food design				
High-pressure hose food grade, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	91	6.110-075.0		☐
Longlife food design with screw connections at both ends				
High-pressure hose food grade Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	92	6.110-053.0	With blue, non-marking and animal fat-resistant outer covering: High-pressure hose (ID 8), 10 m long, with ANTI!Twist and EASY!Lock hand screw connection at both ends.	☐
High-pressure hose food grade Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	93	6.110-054.0	High-pressure hose with double steel reinforcement and blue, non-marking and animal fat-resistant outer covering. 20 m long with EASY!Lock hand screw connections.	☐
Special hoses				
High-pressure hose Ex, 10 m, ID 8, 400 bar, 2 × EASY!Lock	94	6.110-064.0	Electrically conductive, 10 m long high-pressure hose for use in hazardous areas. 10 m long high-pressure hose with EASY!Lock hand screw connections at both ends.	☐
High-pressure hose curved, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	95	6.110-068.0	For connection to hose reels: high-pressure hose, with M 22 × 1.5 connection and curved EASY!Lock hand screw connection. 1.5 m long, suitable for up to 400 bar working pressure.	☐
Classic				
High-pressure hose Classic, 10 m, ID 10, 250 bar × , EASY!Lock	96	4.119-004.0	High pressure hose with convenient EASY!Lock manual fitting from the Classic series by Kärcher. Also suitable for hot water high-pressure cleaners.	☐
High-pressure hose Classic, 10 m, ID 8, 315 bar × , EASY!Lock	97	4.119-005.0		☐
Hose TR DN8 31,5MPa 20m with package, 20 m, ID 8, 315 bar × , EASY!Lock	98	4.119-006.0		☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0

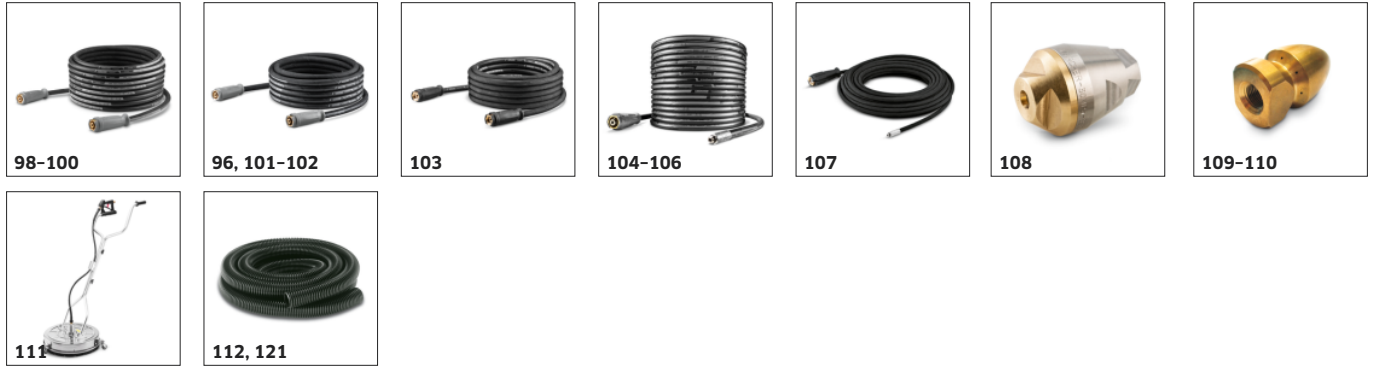

		Order no.	Description	
HIGH-PRESSURE HOSES				
Classic				
Hose TR DN8 31,5MPa 30m with package, 30 m, ID 8, 315 bar × , EASY!Lock	99	4.119-007.0	High pressure hose with convenient EASY!Lock manual fitting from the Classic series by Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Hose assembly with package TR DN8 max31,, 15 m, ID 8, 315 bar × , EASY!Lock	100	4.119-017.0		☐
Hose assembly with package TR DN10 25MPa, 20 m, ID 10, 250 bar × , EASY!Lock	101	4.119-019.0		☐
Hose assembly with package TR DN10 25MPa, 40 m, ID 10, 250 bar × , EASY!Lock	102	4.119-020.0		☐
Hose assembly with package M22 DN10 25MPa, 20 m, ID 10, 250 bar × , M22 × 1.5	103	4.760-892.0	High-pressure hose with M22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
PIPE CLEANING				
Pipe cleaning hose, ID 6				
Pipe cleaning hose, ID 6, 10 m, max. 250 bar	104	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, ID 6, 20 m, max. 250 bar	105	6.110-008.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, ID 6, 30 m, max. 250 bar	106	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 20 m, max. 250 bar	107	6.390-030.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning nozzle				
Pipe cleaning dirt blaster D30/090	108	4.765-010.0	The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	☐
Pipe cleaning nozzle 100	109	5.763-088.0	Pipe cleaning nozzle with 24 mm diameter. With 4 nozzles tilted back at a 30° angle.	☐
Pipe cleaning nozzle 120	110	5.763-089.0	Pipe cleaning nozzle with 24 mm diameter. With 8 nozzles tilted back at a 30° angle.	☐
FLOOR AND HARD SURFACE CLEANER				
FR Classic surface cleaner				
Surface cleaner medium M with package	111	4.760-876.0	Designed for hot water applications up to max. 100 °C: Classic surface cleaner made of metal with HP trigger gun, 500 mm diameter, and nozzle kit (2 × nozzle size 025; others can be ordered separately).	☐
Hard Surface Cleaner FRV 30				
Extension hose 5 m	112	4.440-939.0	5m extension hose for FRV 30. Connection sleeve included.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0



		Order no.	Description	
FLOOR AND HARD SURFACE CLEANER				
FR 30 Me surface cleaner				
Hard surface cleaner FR 30 Me	113	2.640-355.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	☐
Hard Surface Cleaner FR 50				
Surface Cleaner FR 50 Me	114	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	☐
Hard surface cleaner FR 50	115	2.640-679.0		☐
Machine-specific nozzle kits for FR				
Nozzle kit for FR, 1300 l/h – 1800 l/h	116	2.640-781.0	Machine-specific nozzle kit Kärcher power nozzle for hard surface cleaners	☐
Machine-specific nozzle kits for FRV				
Nozzle kit for FRV, 100	117	2.643-769.0	Machine-specific nozzle kit Kärcher power nozzles and jet nozzle for FRV 30 and FRV 50.	☐
Nozzle kit for FRV, 125	118	2.643-768.0		☐
FRV 30 Me surface cleaner				
FRV 30 Me Surface Cleaner	119	2.111-012.0	The stainless steel FRV 30 Me Surface Cleaner is designed for hot water cleaning up to 85 °C in inside and outside areas. Integrated automatic suction removes dirty water directly during operation.	☐
FRV 30 Me	120	2.642-911.0		☐
Extension hose FRV 30 Me and FRV 50 Me	121	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	☐
Surface Cleaner FR 50 Me				
FRV 50 Me surface cleaner	122	2.111-024.0	Surface cleaning with automatic suction of the dirty water for very large surfaces – this means the FRV 50 Me. Hot water cleaning up to 85°C. The FRV 50 Me features a temperature-resistant 10 m polyurethane suction hose. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 2000 l/h / 85°C.	☐
FRV 50 ME	123	2.643-598.0	The stainless steel FRV 50 Me surface cleaner is designed for hot water cleaning up to 85 °C in inside and outside areas. Integrated automatic suction removes waste water directly during operation. The FRV 50 Me features a temperature-resistant 7.5 m polyurethane suction hose, non-marking steering rollers, and a double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1,300 l/h / 85 °C.	☐
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Advanced 3, 900 l/h – 2500 l/h	124	4.112-065.0	Specially designed for use with aggressive cleaning agents: High-quality cup foam lance Advanced 3 with spray angle adjustment and Ecobrass for high-pressure cleaners from Kärcher.	☐
Two-litre cleaning agent container for DUO Advanced foam lance	125	4.112-066.0	The additional two-litre container enables detergent to be changed quickly with the Kärcher Basic, Advanced and DUO Advanced cup foam lance.	☐
Cup foam lance DUO Advanced 3, 900 l/h – 2500 l/h	126	4.112-069.0	DUO Advanced 3 cup foam lance, designed for use with aggressive detergents. With instant switching to high-pressure cleaning, spraying angle adjustment and two-litre tank.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0



		Order no.	Description	
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Basic 3, 900 l/h - 2500 l/h	127	4.112-055.0	Basic 3 cup foam lance for high-pressure cleaners with a flow rate of 900-2500 l/h: Reduces cleaning agent consumption by 50% compared to cup foam lances without a dosing facility.	☐
Cup foam lance Advanced	128	6.394-968.0	Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	☐
1-litre cleaning agent container for cup foam lance basic	129	5.071-414.0	For the quick change of the cleaning agent: Additional 1 litre cleaning agent container for basic foam lance (2.112-053.0, 2.112-054.0 and 2.112-055.0).	☐
1-litre cleaning agent container for cup foam lance advanced	130	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	☐
Inno Foam Kit				
Inno Foam Set with detergent injector	131	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	☐
Inno Foam Set	132	2.112-008.0		☐
Inno Foam Set with detergent injector	133	2.640-151.0		☐
Easy Foam Set				
Easy Foam Set with RM injector	134	2.112-010.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	☐
Easy Foam Set	135	2.112-011.0		☐
Easy Foam Set with RM injector	136	2.640-691.0		☐
Nozzle kits for Inno/Easy Foam Set				
Nozzle kit 110 for Inno / Easy Set 1,000-1,300 l/h	137	2.111-020.0	Nozzle kit 110 contains Kärcher power nozzles and nozzle inserts. For Inn/Easy-Foam set 1000-1300 l/h. For optimal foam system performance.	☐
MIXERS AND INJECTORS				
Cleaning agent injector				
Cleaning agent injector for high and low pressure (without nozzles)	138	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	☐
	139	3.637-001.0		☐
Nozzle insert with order no. 4.637-032.0				
Nozzle insert from 1,100 l/h - HD	140	4.769-002.0	For high pressure with machines above 1.100 l/h	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0



		Order no.	Description	
MIXERS AND INJECTORS				
Nozzle insert with order no. 4.637-032.0				
Nozzle insert from 1,100 l/h - ND	141	4.769-006.0	For low pressure with machines above 1.100 l/h	☐
QUICK CONNECT				
Quick coupling	142	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	☐
Male coupling	143	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread.	☐
Quick coupling	144	6.401-458.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	☐
Male coupling	145	6.401-459.0	Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 × 1.5 external thread.	☐
TAKE-OFF POINT EQUIPMENT				
Hose and spray lance holder VA	146	2.042-003.0	Hose and spray lance wall holder for practical and safe storage of high-pressure hoses or spray lances. Stainless steel wall holder.	☐
REMOTE CONTROL				
Add-on kit remote control 1 for HD-HDS-Stationary	147	2.744-017.0	Preparation for connecting rotary switch remote controls and emergency stop buttons to stationary cold and hot water high-pressure cleaners from Kärcher.	☐
Add-on kit remote control 2 for HD-HDS-Stationary	148	2.744-018.0	Preparation for connecting push-button remote controls and emergency stop buttons to stationary cold and hot water high-pressure cleaners from Kärcher.	☐
Emergency stop switch - for installation in remote control 2.744-015	149	6.635-434.0		☐
	150	6.651-485.0		☐
Remote control I/O, RM 1/2	151	2.744-014.0	Remote control for controlling a stationary cold water high-pressure cleaner. Functions: on/off and dosing of up to two detergents (RM1/RM2).	☐
Multi-key remote control, I/O, RM 1/2	152	2.744-015.0	Multi-key remote control for switching on and off and dosing up to two detergents (RM1/RM2). In conjunction with E-box 2.744-018.0.	☐
CONTROL CABLE				
Control cable 3 × 1.5 mm²	153	6.641-059.0	Connecting cable 3 × 1.5 mm². Available by the meter.	☐
Control cable 5 × 1.5 m	154	6.641-061.0	Control cable 5 × 1.5	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0



		Order no.	Description	
CONTROL CABLE				
Control cable 7 × 1.5 m	155	6.641-064.0	Control cable 7 × 1.5	☐
Control cable 10 × 1.5 m	156	6.641-082.0	Control cable 10 × 1.5	☐
Conduit	157	2.420-008.0	Conduit for control cable installation. Consisting of 3 m conduit, 5x conduit clips, 5x dowels, 5x screws.	☐
HIGH-PRESSURE PIPEWORK				
High-pressure pipe kit	158	2.420-006.0	High-pressure pipe kit with 3 m stainless pipe Ø 16 × 2 mm, ID 12 and mounting accessories: compression fitting, 4 pipe clamps, 4 hanger bolts and 4 plastic dowels.	☐
Connection piece, pipe/HP hose, stainless steel (Ermeto)	159	2.638-181.0	Stainless steel	☐
Connection piece, pipe/stop cock, stainless steel (Ermeto)	160	2.638-183.0	For stationary HD/HDS machines: Stainless steel transition piece comprising double nipple, union nut and cutting ring. For connecting the pipe to the shut-off valve.	☐
Stop cock, stainless steel (Ermeto)	161	4.580-163.0	Stainless steel shut-off valve with M 22 × 1.5 thread suitable for connecting pipeline and high-pressure hose for stationary high-pressure systems from Kärcher.	☐
Union nut, stainless steel (Ermeto)	162	6.386-428.0	(VA)	☐
T-screw connection, stainless steel (Ermeto)	163	6.386-465.0	Stainless steel	☐
Stainless steel elbow union 90°	164	6.386-466.0	Stainless steel elbow union 90° with compression fitting (Ermeto) at both ends for 16 mm pipes.	☐
Quick coupling, loose part, M 22 × 1.5	165	6.463-023.0	loose part	☐
Connector, galvanised steel	166	2.638-180.0	Alternativ : stainless steel 2.638-181	☐
Shut-off valve, galvanised steel	167	4.580-144.0	Shut-off valve made from zinc-coated steel for stationary high-pressure systems from Kärcher. For connecting the pipeline to the high-pressure hose.	☐
Pipe kit, galvanised steel, 3 m	168	2.420-004.0	High-pressure pipe kit with 3 m galvanised steel pipe Ø 16 × 2.5 mm, DN 11 and fixing accessories: Compression fitting, 4 pipe clamps, 4 hanger bolts and 4 plastic dowels.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0



		Order no.	Description	
HIGH-PRESSURE PIPEWORK				
Tee, galvanised steel	169	6.386-269.0	Tee (90°), galvanised steel with compression fitting for 16 mm pipes. Fixing material (Ermeto) included.	☐
Elbow union, galvanised steel	170	6.386-356.0	Elbow union, galvanised steel. With 90° angle piece with compression fitting (Ermeto) at both ends for 16 mm pipes.	☐
Pipe insulation, per running meter	171	6.286-147.0	For thermal insulation of pipes. Pipe cladding. Wall thickness 9 mm. PE foam with moisture barrier. Available per running meter.	☐
Adapter piece, galvanised steel	172	2.638-182.0	Alternative: stainless steel 2.638-183	☐
Quick-release coupling, fixed part	173	6.463-025.0	fixed part	☐
Union nut, galvanised steel	174	6.386-423.0	Union nut, galvanised steel. For 16 mm compression fitting.	☐
Cutting ring	175	6.386-357.0	Galvanised steel cutting ring. For 16 mm compression fitting.	☐
PLANT INSTALLATION				
Fine-mesh water filter	176	2.209-806.0	Fine-mesh water filter	☐
Emergency Stop switch	177	2.744-002.0	Emergency Stop switch with ISO housing for wall mounting. With 0.4 m power cord and fixing material.	☐
HOSE TRACK SYSTEM HIGH-PRESSURE CLEANERS				
C-rail holder	178	6.541-027.0	Wall-mounted C-rail holding clamp for hose guide of Kärcher high-pressure cleaners.	☐
C-rail, per running metre	179	6.233-017.0	C-rail profile as a guide track. 30x32 mm, 2 mm wall thickness 1.56 kg/m. Available per running metre.	☐
Rail connector	180	6.541-011.0	Rail connector	☐
End stop	181	6.541-025.0	End stop	☐
Cable trolley	182	6.541-026.0	Cable trolley for C-rail profile. 20 kg capacity. Weight 0.11 kg. Galvanised steel ball bearing.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0



		Order no.	Description	
HOSE TRACK SYSTEM HIGH-PRESSURE CLEANERS				
End bracket	183	6.541-028.0	End bracket	☐
Handle	184	6.541-029.0	C-rail profile clamp. Galvanised steel. Plastic clamping parts. Weight 0.06 kg.	☐
Wall bracket	185	6.541-039.0	Wall holder for galvanised steel C-rail profile.	☐
Rail holder wall	186	6.541-012.0	Galvanised steel rail bracket for C-rail profile. Weight 0.235 kg.	☐
Spray lance runner, movable	187	4.042-610.0	moveable	☐
SEALS FOR TRAPEZOIDAL THREAD				
Gasket set with 9x O-rings for TR thread	188	2.880-001.0		☐
COUPLING PARTS				
Rotary coupling				
Rotary coupling	189	4.111-021.0	Reliably prevents twisting of HP hoses. Connection Easy!Lock. Handle protection	☐
	190	4.401-091.0	Reliably prevents twisting of HP hoses. Connection M 22 × 1.5 m. Handle protection	☐
Coupling				
Coupler -2 × M22 × 1,5	191	4.403-002.0	For connecting and extending high-pressure hoses. Connection 2 × M 22 × 1.5.	☐
Connector				
Screw socket for surface cleaners and Servo Control controllers	192	4.111-022.0	For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) - 1 × M 22 × 1.5/1 × M 18 × 1.5.	☐
Y distributor	193	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐
Short spray unit	194	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	☐
Y distributor	195	4.405-048.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐
EASY!Lock adapter				
Adapter 1 M22AG-TR22AG	196	4.111-029.0	Adapter 1 to connect the old hose with the new hose	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0



		Order no.	Description	
COUPLING PARTS				
EASY!Lock adapter				
Adapter 2 M22IG-TR22AG	197	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	☐
Adapter 3 M22IG-TR22AG	198	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	☐
Adapter 4 TR22IG-D11	199	4.111-032.0	Adapter 4 to connect the new gun with the old swivel hose	☐
Adapter 5 TR22IG-M22AG	200	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	☐
Adapter 6 TR22IG-M22AG	201	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	☐
Adapter 7 M18IG-TR20AG	202	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	☐
Adapter 8 TR20IG-M18AG	203	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	☐
Adapter hose extension 9 TR	204	4.111-037.0	Adapter 9 to connect the new hose with the new hose	☐
Adapter 12 rotary coupling EASY!Lock 22 IG - M22 x 1.8 AG	205	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	☐
HOSE REELS				
Automatic, self-winding hose reels for wall mounting				
Automatic hose reel, powder-coated steel / plastic, 20 m	206	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	☐
Automatic stainless steel / synthetic material hose drum, 20 m	207	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	☐
Automatic hose reel, coated, 20 m	208	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	☐
Automatic hose reel, stainless steel, includes swivel holder, 20 m	209	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	☐
WATER CONNECTION				
Geka coupling				
Geka connector with hose barb, R 1/2"	210	6.388-461.0	with hose liner	☐

☐ Available accessories.


ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0



			Order no.	Description	
WATER CONNECTION					
Geka coupling					
Geka connector with hose barb, R 3/4"	211	6.388-455.0	with hose liner		☐
Geka connector with hose barb, R 1"	212	6.388-465.0	with hose barb		☐
Geka connector with inner thread, R 3/4"	213	6.388-473.0	with female thread		☐
Geka connector with internal thread, R 1"	214	6.388-458.0			☐
STATIONARY HIGH-PRESSURE CLEANING SYSTEMS					
Add-on kit cleaning agents double	215	2.209-006.0	The attachment kit makes it easy to dose a second detergent by remote control.		☐
Add-on kit pressure discharge	216	2.209-007.0	Attachment kit for automatic pressure relief for stationary cold and hot water high-pressure cleaners. For effective protection of the high-pressure system.		☐
Attachment kit with hour counter and pressure gauge	217	2.209-008.0	Attachment kit with hour counter and pressure gauge for stationary cold and hot water high-pressure cleaners. For easy control of the machine's operating time and operating pressure.		☐
Water inlet solenoid valve attachment kit	218	2.209-010.0	Water inlet solenoid valve attachment kit for stationary cold and hot water high-pressure cleaners. The solenoid valve automatically closes the water supply to the high-pressure cleaner when the machine is at a standstill.		☐
Steel floor structure	219	2.210-001.0	Steel floor structure for the installation of stationary high pressure cold water machines. Dimensions W x H x D: 800 x 740 x 540 mm.		☐
Stainless steel floor structure	220	2.210-002.0	Stainless steel floor structure for the installation of stationary high pressure cold water machines. Dimensions W x H x D: 800 x 740 x 540 mm.		☐
Attachment kit stand, 200 mm	221	2.638-276.0	The attachment kit enables stationary high-pressure cleaners from Kärcher to be installed on the ground in a versatile and stable manner. The machine is securely positioned 200 mm from the floor.		☐
Double connecting	222	5.402-001.0			☐
High-pressure ball valve	223	6.412-066.0			☐
Quick release coupling	224	6.463-022.0			☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0

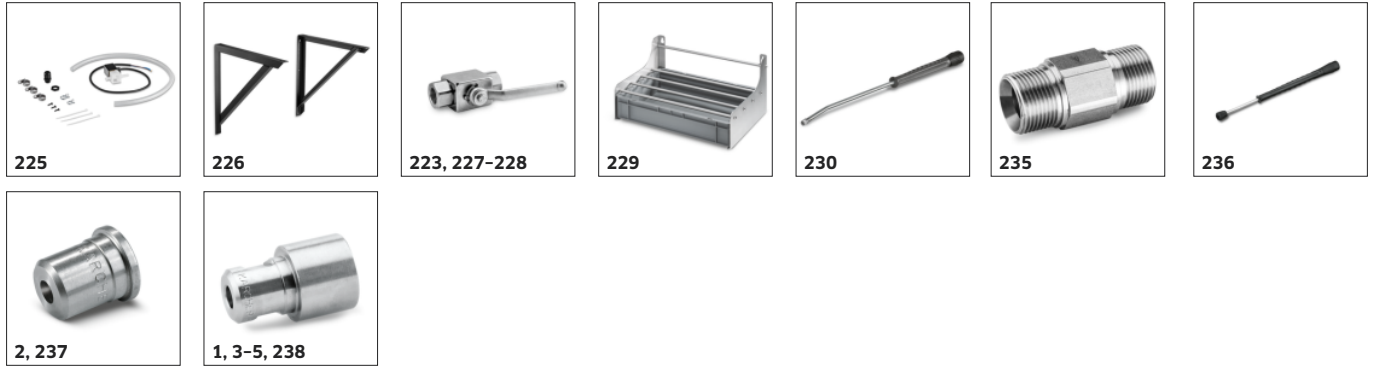

		Order no.	Description	
STATIONARY HIGH-PRESSURE CLEANING SYSTEMS				
RM 1 dosing attachment kit via remote control	225	2.209-005.0	The attachment kit makes it easy to dose the detergent via remote control.	☐
Steel wall bracket, complete	226	2.209-009.0	The wall bracket enables easy and safe installation of a stationary high-pressure cleaner (cold or hot water) on the wall.	☐
STATIONARY HIGH-PRESSURE CLEANERS				
High-pressure ball valve	227	6.412-067.0		☐
High-pressure ball valve, stainless steel, G1/2"	228	6.413-500.0	High-pressure ball valve made of stainless steel. Nominal size DN 13, nominal pressure PN 400 for a temperature range up to 100 °C. Connection G1/2" internal thread.	☐
Wall bracket for 2 × cleaning agent cans, stainless steel	229	2.641-703.0	Wall bracket for two cans.	☐
Spray lance, rotatable, grey	230	4.760-625.0	Spray lance, rotatable, grey, 600 mm.	☐
	231	4.760-626.0	Spray lance, rotatable, grey, 1,050 mm.	☐
	232	4.760-627.0	Spray lance, rotatable, grey, 1,550 mm.	☐
	233	4.760-628.0	Spray lance, rotatable, grey, 2,050 mm.	☐
High-pressure hose	234	4.440-172.0		☐
ULTRA-HIGH-PRESSURE CLEANERS				
Couplings and connectors				
Coupling	235	4.403-004.0	For joining and extending HD hoses. Connection 2 × M 22 × 1.5. Material: Stainless steel.	☐
Spray lances				
Spray lance	236	4.760-653.0	With nozzle holder.	☐
NOZZLES				
Power nozzles				
Flat jet nozzle, 15120	237	2.113-077.0	15° flat jet nozzle 15120 for high-pressure cleaner HD 18/50. Reduces the water pressure from 500 to 150 bar while retaining flow rate of 1,800 l/h.	☐
Point jet nozzle, 120	238	2.113-078.0	Point jet nozzle 120 for high-pressure cleaner HD 18/50. Reduces the water pressure from 500 to 150 bar while retaining flow rate of 1800 l/h.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/15-4 ST 1.524-965.0



		Order no.	Description	
SELF-SERVICE WASHING SYSTEMS AND EQUIPMENT				
Wash bay equipment				
360° swivelling boom for high-pressure hose	239	4.058-106.0	Swivelling boom for HP-working hose (360° turning circle). Mounted above the washing bay.	☐
Miscellaneous				
Swinging boom 180°, wall-mounted	240	2.637-120.0	Ideal for stationary HD/HDS machines from Kärcher, e.g. in washing bays: wall-mounted swivelling boom with 180° outreach for holding the high-pressure hose.	☐
DRUM AND TANK CLEANING				
Barrel and tank cleaning				
Spray head HKF 30/14-E	241	6.751-061.0	Compact interior cleaning head made of stainless steel for cleaning the interiors of drums and containers with openings of 65 mm or more. Offers an impressively low weight and constant rotation speed by means of an electric motor.	☐

☐ Available accessories.