

Nilfisk VP25

Daily use – Quick start with Magic tag



1. Inspect and clean all the optical sensors with a microfiber cloth (3D Lidar on top only if available).



2. Place the key and turn on the machine.



3. Enter the PIN code.



4. Press break release to use the machine manually.



5. Check that the dust bag is not full, replace if needed.



6. Verify that the battery is charged.



7. Move the machine to a Magic tag.



8. Scan at 20-30 cm from the tag.



9. Select the plan on the right list and press clean – the machine will automatically come back to the Magic tag when finished.

Daily maintenance – When the cleaning is finished



1. Press break release to use the machine manually.



2. Ensure the machine is turned off during the daily maintenance operations.



3. Clean and inspect the deck and cylindrical brushes, replace them if damaged or worn.



4. Clean and inspect the side brushes (brooms), replace them if damaged or worn.



5. Plug in the external charger and recharge batteries for up to 4 hours for a full charge.

Nilfisk VP25

Daily use – Quick start with Docking station (no scheduled cleaning) – only charging









1. Inspect and clean all the optical sensors with a microfiber cloth (3D Lidar on top only if available).

2. Verify that the machine is fully charge.

3. Enter the PIN code.

4. Press the undock command.








5. Check that the dust bag is not full, replace if needed.

6. Select the plan on the right list and press clean – the machine will automatically come back to the Docking station when finished.

7. The Docking station will automatically recharge the battery.

Daily use – Schedule a cleaning mission with the Docking station



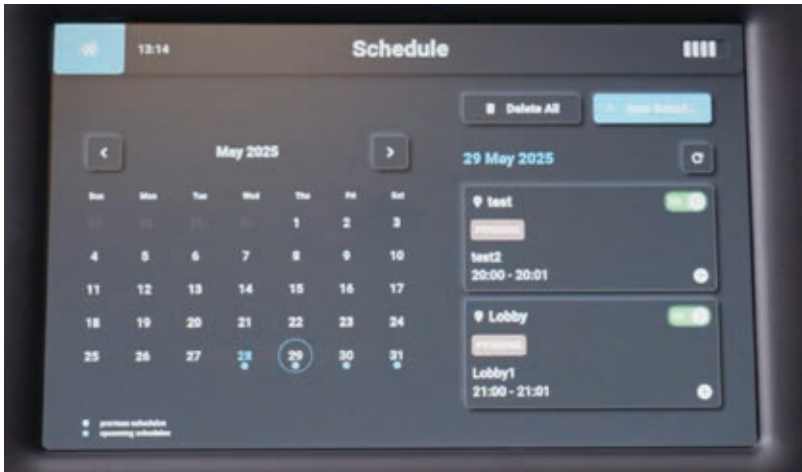



1. Select "Schedule cleaning" under the options menu.

2. Select "New schedule" on the top right of the screen.

3. Select map, section, return point, start time, frequency and then press "Save".

Daily maintenance – When the cleaning is finished









1. Enter the PIN code.

2. Press the undock command.

3. Press break release to use the machine manually.

4. Ensure the machine is turned off during the daily maintenance operations.









5. Clean and inspect the cylindrical brushes, replace them if damaged or worn.

6. Check that the dust bag is not full, replace if needed.

7. Check for blockage in the vacuum hose, as needed or weekly.

8. Re-dock the unit when the daily maintenance is completed.