

SB MB

Technically sophisticated, high-performance and economical SB multi-station washing system for up to four washing stations.



Order no. 1.070-001.0

- For two to four wash bays
- For installation in a cabinet or plant room

Technical data

EAN code		4039784563209
Hot water temperature	°C	max. 60
Working pressure	bar	100 / 120
Number of current phases	Ph	3
Voltage	V	400
Frequency	Hz	50
Flow rate per pump	l/h	500
Software updates available until		2031-01-01

This machine requires instruction.

Equipment

Washing programs: 11 Piece(s)

2-key system

Pneumatic dosing pumps



Reliable dosing

- Pneumatic dosing pumps ensure process reliability, and therefore satisfied customers, at every wash bay during peak periods.



Sophisticated construction


- The large front doors with a removable middle bar allow easy access to the assemblies – this saves maintenance time and your system is soon ready to use again.



Protection against theft

- Two-key system: one key each for the equipment section and the coin cassette

ACCESSORIES FOR SB MB
1.070-001.0

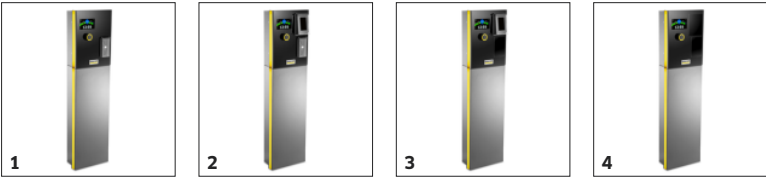

		Order no.	Description	
PAYMENT SYSTEMS				
K!Control SB with coin acceptor	1	2.644-540.0	K!Control is a start and payment system with coin acceptor that allows wash programmes to be conveniently started using coins.	☐
K!Control SB with credit card terminal and coin acceptor	2	2.644-541.0	K!Control is a start and payment system with coin acceptor and credit card terminal that enables payments with coins as well as contactless payment.	☐
K!Control SB with credit card terminal	3	2.644-567.0	K!Control is a start and payment system with an integrated credit card terminal for contactless payment.	☐
K!Control SB with external payment system	4	2.644-568.0	K!Control enables wash programmes to be started via an external payment system and ensures easy operation at self-service wash systems.	☐

☐ Available accessories.