

HDC 60/16 VA

The HDC 60/16 VA, housed in a stainless steel frame, delivers 160 bar and 6000 l/h for up to six users at the same time. The modern PLC control unit ensures intelligent monitoring and optimal operation.



Order no.

1.509-923.0

Technical data

EAN code		4066529196101
Pressure	bar	80 - 160
Max. pressure	bar	200
Flow rate	l/h	6000
Inlet temperature	°C	85
Connected load	kW	34
Protection	A	80
Motor start-up		Soft start
Number of pumps	Piece(s)	3
Back-up fuse	A	80
Number of current phases	Ph	3
Voltage	V	400
Frequency	Hz	50
Weight incl. packaging	kg	429.1
Dimensions (L × W × H)	mm	1168 × 800 × 1469

This machine requires instruction.

Equipment

Oil dipstick
Sight glass for oil level
4-pole motor (low-speed machine)
Air-cooled motor
Crankshaft pump with ceramic pistons
Dry-running protection
Storage tank with float valve
Elapsed time counter
Large water fine filter
Pressure gauge
Frame and cover: Stainless steel
Servo Control
Pressure cut-off



Simultaneous use by up to 6 users possible

- Increased productivity and time savings through parallel completion of cleaning tasks by several employees.
- No set-up times thanks to immediate cleaning start at the extraction points.
- Savings in investment and maintenance costs thanks to a centralised, high-performance machine for multiple operations instead of several high-pressure cleaners.



Powerful and reliable

- 15 kW Kärcher crankshaft pump
- 4-pole low-speed electric motors with soft-starter guarantee long service life.
- Low-speed industrial pump




With PLC control unit that monitors and regulates all parameters

- The intelligent control unit ensures continuous, safe and trouble-free operation of the plant by automatically monitoring all operating conditions.
- The built-in display makes it easy to monitor operating parameters and, thanks to clear error messages, reduces response times when maintenance is required.
- By switching pumps on as needed, the system adjusts its output directly to actual water consumption, avoiding unnecessary energy use and reducing mechanical stress on components during partial operation.

ACCESSORIES FOR HDC 60/16 VA

1.509-923.0

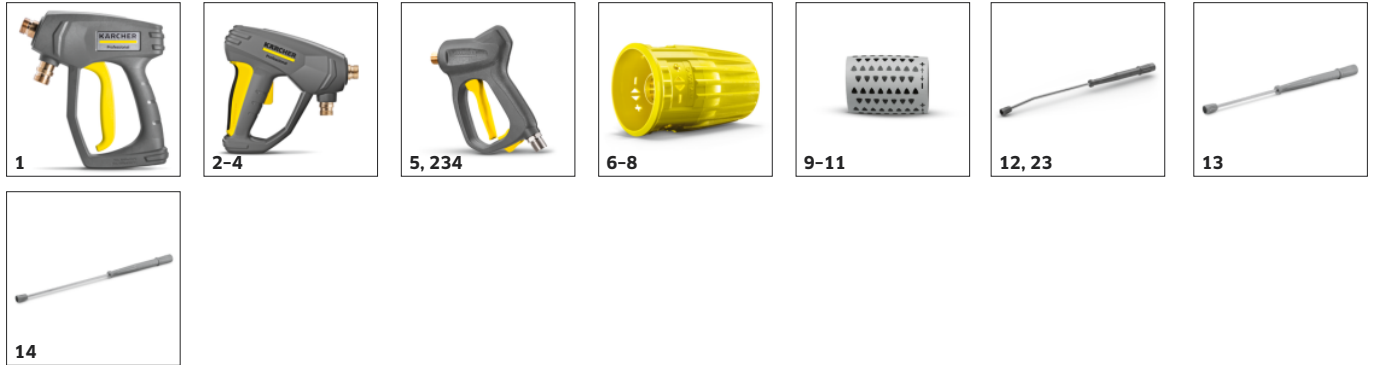


		Order no.	Description	
TRIGGER GUNS				
Spray guns				
Pistol TR 155°C with package	1	4.119-002.0	Classic spray gun with valve. Also suitable for Kärcher hot water high-pressure cleaners.	☐
EASY!Force Advanced	2	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	☐
EASY!Force Food	3	4.118-015.0	Perfect for the food industry: the EASY!Force high-pressure gun with full ceramic valve enables fatigueless working due to virtually zero holding force for the operator.	☐
EASY!Force Ex	4	4.118-020.0	The EASY!Force trigger gun is suitable for use in explosion-proof areas. It utilizes the recoil force of the high-pressure jet to reduce holding force for the user	☐
High-End HD Trigger Gun	5	4.118-011.0	Trigger gun for professional use in the food industry and general industrial applications. Designed for water flow rates of up to 2500 l/h.	☐
Servo control				
Servo Control, 750 l/h – 1100 l/h	6	4.118-008.0	Water quantity and pressure regulated directly from the hand spray gun.	☐
Servo Control, 1100 l/h –	7	4.118-009.0		☐
Servo Control, food, 750 l/h – 1100 l/h	8	4.118-016.0	Water flow and pressure control on the trigger gun. Food-grade, parts in contact with water are stainless steel.	☐
Servo Control, 750 l/h – 1100 l/h	9	4.775-470.0	Water flow and pressure control on the trigger gun.	☐
Servo Control, 1100 l/h –	10	4.775-471.0	Water quantity and pressure regulated directly from the hand spray gun.	☐
Servo Control, stainless steel version, 750 l/h – 1100 l/h	11	4.775-800.0	Water volume and pressure regulation directly from the spray gun. Version for the food industry, water-carrying components made from stainless steel.	☐
SPRAY LANCES				
Rotating spray lances				
Jet pipe explosion protected only for re, 1050 mm, rotatable	12	4.112-034.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Jet pipe with transport packaging, 840 mm	13	4.119-003.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Spray lance Classic EASY!Lock, 1050 mm	14	4.119-008.0	High-pressure spray lance with EASY!Lock screw connections from the Classic series from Kärcher. Also suitable for Kärcher hot water high-pressure cleaners.	☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA

1.509-923.0

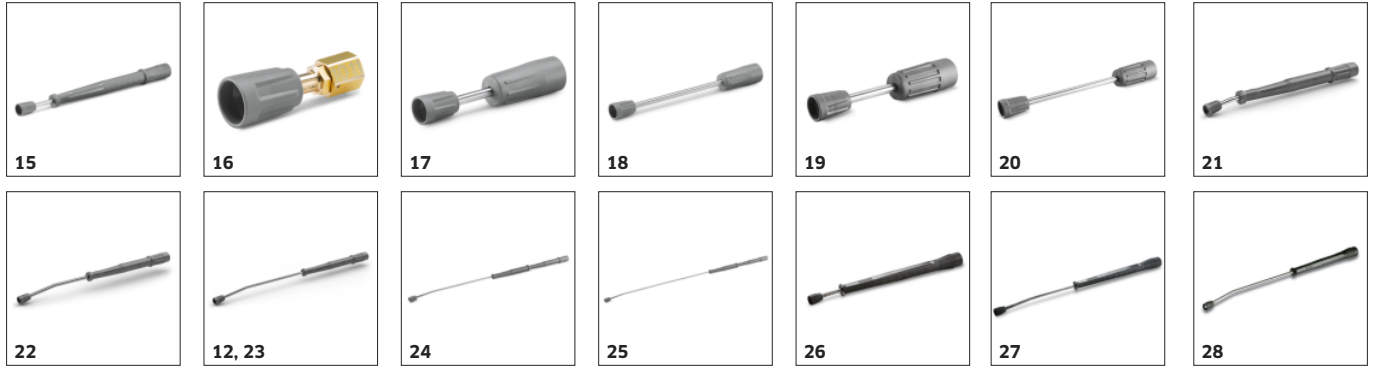

		Order no.	Description	
SPRAY LANCES				
Rotating spray lances				
Jet pipe TR 600mm with package, 600 mm	15	4.119-009.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe Classic TR 100mm, 100 mm	16	4.119-013.0		☐
Jet pipe Classic TR 200mm, 200 mm	17	4.119-014.0		☐
Jet pipe Classic TR 400mm, 400 mm	18	4.119-015.0		☐
Spray lance, 250 mm, rotatable	19	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	☐
Spray lance, 400 mm, rotatable	20	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	☐
Spray lance, 600 mm, rotatable	21	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	22	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1050 mm, rotatable	23	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1550 mm, rotatable	24	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	25	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 600 mm, rotatable	26	4.760-664.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	27	4.760-663.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1050 mm, rotatable	28	4.760-660.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA

1.509-923.0



		Order no.	Description	
SPRAY LANCES				
Rotating spray lances				
Spray lance, 1550 mm, rotatable	29	4.760-661.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	30	4.760-662.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance				
Spray lance Classic 1,050 mm	31	4.760-855.0	High-pressure spray lance with M 22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Jet pipe 600mm with package	32	4.760-856.0		☐
Jet pipe Classic M 200mm	33	4.760-887.0		☐
Jet pipe Classic M 400mm	34	4.760-888.0		☐
Jet pipe Classic M 840mm	35	4.760-895.0		☐
250 mm lance, non-rotatable	36	4.760-667.0	250 mm stainless steel lance. With manual coupling. Non-rotatable.	☐
550 mm lance, non-rotatable	37	4.760-665.0	550 mm stainless steel lance. With manual coupling. Non-rotatable.	☐
Double lance				
Double lance, 960 mm	38	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	☐
	39	6.394-665.0		☐
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt blaster, large				
Dirt blaster Vibrasoft, 080	40	4.114-068.0	Vibrasoft rotary nozzle with rotating pencil jet.	☐
Dirt blaster, large, 055/060	41	4.114-036.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	☐
Dirt blaster, 055/060	42	4.763-250.0		☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA 1.509-923.0



41, 43, 46, 48, 50



42, 44-45, 47, 49



51-52



53-54



55, 57, 60



56, 58, 61-64, 66,
70-74, 76-78, 81

		Order no.	Description	
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt blaster, large				
Dirt blaster, large, 070/080	43	4.114-030.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	☐
Dirt blaster, 070/080	44	4.763-254.0		☐
Dirt blaster, 100	45	4.764-208.0	Dirt blaster - rotating point jet - 10 times the cleaning performance. Maximum working time thanks to ceramic nozzle/bearing ring. Max. 300 bar / 30 MPa, 85 °C.	☐
Dirt blaster, large, 100	46	4.114-048.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	☐
Dirt blaster, 120	47	4.763-930.0		☐
Dirt blaster, large, 120	48	4.114-044.0		☐
Dirt blaster, 130	49	4.764-209.0	Dirt blaster - rotating point jet - 10 times the cleaning performance. Maximum working time thanks to ceramic nozzle/bearing ring. Max. 300 bar / 30 MPa, 85 °C.	☐
Dirt blaster, large, 130	50	4.114-049.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	☐
Classic rotary nozzle				
Rotor nozzle TR 060	51	4.119-025.0	The powerful rotating point jet of the Classic rotary nozzle from Kärcher ensures the best possible cleaning results and is suitable for water temperatures of up to 60 °C.	☐
Rotor nozzle TR 080	52	4.119-026.0		☐
Rotary nozzle M 060 with package	53	4.760-871.0		☐
Rotary nozzle M 080 with package	54	4.760-872.0		☐
KÄRCHER POWER NOZZLE				
HP nozzle spray angle 0°				
Power nozzle 0°, 055	55	2.884-536.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	☐
Power nozzle 0°, 075	56	2.113-037.0		☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA

1.509-923.0



55, 57, 60



56, 58, 61-64, 66,
70-74, 76-78, 81



59, 65, 68-69,
79-80



67, 82

		Order no.	Description	
KÄRCHER POWER NOZZLE				
HP nozzle spray angle 0°				
Power nozzle 0°, 075	57	2.884-540.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	☐
Power nozzle 0°, 080	58	2.113-038.0		☐
	59	2.884-541.0		☐
Power nozzle 0°, 110	60	2.884-544.0	Solid jet for very stubborn dirt and stains.	☐
Power nozzle spray angle 15°				
Power nozzle 15°, 055	61	2.113-047.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	☐
Power nozzle 15°, 070	62	2.113-049.0		☐
Power nozzle 15°, 075	63	2.113-050.0		☐
Power nozzle 15°, 080	64	2.113-051.0		☐
Power nozzle spray angle 25°				
Power nozzle , 055	65	2.883-401.0	Fan jet nozzle for large area coverage and stubborn dirt and stains.	☐
	66	2.113-025.0	Flat jet nozzle for large area performance and stubborn dirt.	☐
Power nozzle 25°, 070	67	2.883-404.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	☐
Power nozzle 25°, 075	68	2.883-405.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains	☐
Power nozzle , 080	69	2.883-406.0	Fan jet nozzle for large area coverage and tackling stubborn dirt and stains.	☐
Power nozzle , 070	70	2.113-028.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains.	☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA 1.509-923.0



		Order no.	Description	
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 25°				
Power nozzle 25°, 075	71	2.113-014.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains	☐
Power nozzle , 080	72	2.113-015.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains.	☐
Power nozzle 25°, 090	73	2.113-016.0		☐
Power nozzle 25°, 100	74	2.113-017.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	☐
Power nozzle 25°, 155	75	2.885-157.0		☐
Power nozzle 25°, 110	76	2.113-018.0		☐
Power nozzle 25°, 155	77	2.113-030.0	Flat jet nozzle for large area performance and stubborn dirt.	☐
Power nozzle spray angle 40°				
Power nozzle 40°, 055	78	2.113-055.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	☐
	79	2.884-525.0		☐
Power nozzle 40°, 075	80	2.884-526.0		☐
Power nozzle , 090	81	2.113-069.0		☐
Power nozzle 40°, 080	82	2.884-527.0		☐
Power nozzle , 130	83	2.113-067.0		☐
Power nozzle , 200	84	2.113-065.0		☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA

1.509-923.0



		Order no.	Description	
ECO!BOOSTER				
eco!Booster TR 080	85	2.113-089.0	eco!Booster with 50% higher area performance than the Kärcher power nozzle; ideal for delicate surfaces. For cold and hot water high-pressure cleaners (nozzle size 080).	☐
Eco!Booster TR 060	86	2.113-090.0	eco!Booster with 50% higher area performance compared to the Kärcher power nozzle; ideal for delicate surfaces. Suitable for cold and hot water high-pressure cleaners with a nozzle size of 060.	☐
Eco!Booster MAX TR 060	87	2.113-098.0	eco!Booster MAX: 100 percent higher area performance compared to the Kärcher standard flat jet nozzle.	☐
Eco!Booster MAX TR 080	88	2.113-099.0		☐
QUICK CONNECT				
Quick coupling	89	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	☐
Male coupling	90	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread.	☐
Quick coupling	91	6.401-458.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	☐
Male coupling	92	6.401-459.0	Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 × 1.5 external thread.	☐
TAKE-OFF POINT EQUIPMENT				
Hose and spray lance holder VA	93	2.042-003.0	Hose and spray lance wall holder for practical and safe storage of high-pressure hoses or spray lances. Stainless steel wall holder.	☐
CONTROL CABLE				
Control cable 5 × 1.5 m	94	6.641-061.0	Control cable 5 × 1.5	☐
Conduit	95	2.420-008.0	Conduit for control cable installation. Consisting of 3 m conduit, 5x conduit clips, 5x dowels, 5x screws.	☐
HIGH-PRESSURE PIPEWORK				
Quick coupling, loose part, M 22 × 1.5	96	6.463-023.0	loose part	☐
Quick-release coupling, fixed part	97	6.463-025.0	fixed part	☐
HOSE TRACK SYSTEM HIGH-PRESSURE CLEANERS				
C-rail holder	98	6.541-027.0	Wall-mounted C-rail holding clamp for hose guide of Kärcher high-pressure cleaners.	☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA

1.509-923.0



		Order no.	Description	
HOSE TRACK SYSTEM HIGH-PRESSURE CLEANERS				
C-rail, per running metre	99	6.233-017.0	C-rail profile as a guide track. 30x32 mm, 2 mm wall thickness 1.56 kg/m. Available per running metre.	☐
Rail connector	100	6.541-011.0	Rail connector	☐
End stop	101	6.541-025.0	End stop	☐
Cable trolley	102	6.541-026.0	Cable trolley for C-rail profile. 20 kg capacity. Weight 0.11 kg. Galvanised steel ball bearing.	☐
End bracket	103	6.541-028.0	End bracket	☐
Handle	104	6.541-029.0	C-rail profile clamp. Galvanised steel. Plastic clamping parts. Weight 0.06 kg.	☐
Wall bracket	105	6.541-039.0	Wall holder for galvanised steel C-rail profile.	☐
Spray lance runner, movable	106	4.042-610.0	moveable	☐
NOZZLE UNION / SPACER				
Nozzle union				
Nozzle screws	107	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	☐
HIGH-PRESSURE HOSES				
Standard				
High-pressure hose, 10 m, ID 8, 315 bar, 1 x M22 x 1.5 / 1 x AVS-hose reel connection	108	6.390-025.0	10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 1 x M22 x 1.5 / 1 x AVS-hose reel connection	109	6.390-185.0	15 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 1 x M22 x 1.5 / 1 x AVS-hose reel connection	110	6.390-171.0	20 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
Standard with unions on both sides				
High-pressure hose, 10 m, ID 10, 220 bar, 2 x EASY!Lock	111	6.110-041.0	Impressive values and basic equipment: 10 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 x M22 x 1.5	112	6.391-342.0	To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA

1.509-923.0



113



114, 118, 120, 124



115, 117, 119



111, 116, 122



121



123, 127



125, 129



126, 128

		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
High-pressure hose, 15 m, ID 8, 315 bar, 2 x M22 x 1.5	113	6.390-010.0	With screw connections on both sides, M 22 x 1.5 with bend protection.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 2 x M22 x 1.5	114	6.390-031.0	Screw connections at both ends, M 22 x 1.5, with kink protection.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 x EASY!Lock	115	6.110-031.0	High-pressure hose (DN 8) suitable up to 315 bar pressure. With innovative EASY!Lock manual screw fitting on both sides, ANTI!Twist and 10 m long.	☐
High-pressure hose, 15 m, ID 8, 315 bar	116	6.110-033.0	15 m high-pressure hose, DN 8, fitted with EASY!Lock manual screw connections at both ends.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 2 x EASY!Lock	117	6.110-030.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose, 15 m, ID 10, 220 bar, 2 x M22 x 1.5	118	6.390-023.0	Connectors at both ends, M 22 x 1.5, with kink protection.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 2 x EASY!Lock	119	6.110-032.0	High-pressure hose (DN 8) with a length of 20 m and EASY!Lock manual screw fitting on both sides. Approved for max. 315 bar pressure.	☐
High-pressure hose, 20 m, ID 10, 220 bar, 2 x M22 x 1.5	120	6.390-726.0	with union on both sides, M 22 x 1.5 with anti-kink protection. NW 10/155°C/220 bar	☐
High-pressure hose, 25 m, ID 10, 220 bar, 2 x M22 x 1.5	121	6.391-513.0		☐
High-pressure hose, 15 m, ID 10, 220 bar, 2 x EASY!Lock	122	6.110-042.0	Equipped with innovative EASY!Lock manual screw fitting and suitable for pressures up to 220 bar: 15 m long high-pressure hose (DN 10).	☐
High-pressure hose, 40 m, ID 10, 220 bar, 2 x M22 x 1.5	123	6.391-510.0	with union on both sides, M 22 x 1.5 with anti-kink protection. NW 10/155°C/220 bar	☐
High-pressure hose, 20 m, ID 10, 220 bar, 2 x EASY!Lock	124	6.110-043.0	20 m in length and the extremely time-saving and comfortable EASY!Lock manual screw fitting on both sides are some of the main features of this high-pressure hose (DN 10).	☐
High-pressure hose, 15 m, ID 12, 210 bar, 2 x M22 x 1.5	125	6.391-849.0	High-pressure hose for water volumes greater than 1,800 l / h. With union on both sides. 2x M 22 x 1.5 with anti-kink protection.	☐
High-pressure hose, 25 m, ID 10, 220 bar, 2 x EASY!Lock	126	6.110-044.0	Impressive values and basic equipment: 25 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.	☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA

1.509-923.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
High-pressure hose, 40 m, ID 12, 210 bar, 2 × M22 × 1.5	127	6.391-865.0	High-pressure hose for water volumes greater than 1,800 l / h. With union on both sides. 2x M 22 × 1.5 with anti-kink protection.	☐
High-pressure hose, 40 m, ID 10, 220 bar, 2 × EASY!Lock	128	6.110-045.0	40 m long high-pressure hose with EASY!Lock system for the time-saving manual screw connection (both sides). Nominal size (DN) 10, working pressure up to 220 bar.	☐
High-pressure hose, 15 m, ID 12, 210 bar, 2 × EASY!Lock	129	6.110-059.0	Designed for working pressures up to 250 bar: High-pressure hose (DN 12) with a length of 15 m. Has the comfortable EASY!Lock manual screw fitting on both sides.	☐
Longlife 400				
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	130	6.110-028.0	20 m high-pressure hose (ID 8), for up to 400 bar pressure. With AVS hose reel connection and double steel reinforcement. EASY!Lock hand screw connection at other end of the hose.	☐
High-pressure hose Longlife, 40 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	131	6.110-076.0	High-pressure hose with 2-compartment steel insert, AVS hose reel connection, as well as EASY!Lock manual screw connection.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	132	6.390-208.0	20 m high-pressure hose Longlife 400 (DN 8) with patented (rotating) AVS trigger gun connector and manual coupling. Two layer high-strength steel wire reinforced.	☐
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × EASY!Lock	133	6.110-024.0	1.5 m high-pressure hose (DN 8) with EASY!Lock manual screw fitting on both sides. Designed for max. 400 bar pressure.	☐
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	134	6.110-069.0	1.5 m long high-pressure hose (DN 8) suitable for up to 400 bar pressure with double steel core. Connections: M 22 × 1.5, as well as the comfortable and quick EASY!Lock manual screw fitting.	☐
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	135	6.110-038.0	10 m long high-pressure hose (DN 8) with double steel core, EASY!Lock manual screw fitting on both sides, and ANTI!Twist. Approved for max. 400 bar pressure.	☐
High-pressure hose Longlife, 30 m, ID 8, 400 bar, 2 × EASY!Lock	136	6.110-023.0	High-pressure hose with double steel core, ANTI!Twist and EASY!Lock manual screw fitting on both sides. Nominal size DN 8, 30 m long, approved for max. 400 bar pressure.	☐
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × M22 × 1.5	137	6.391-354.0	To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 × 1.5.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	138	6.110-027.0	High-pressure hose with ANTI!Twist, EASY!Lock manual screw fittings and double steel core. 20 m long, nominal size DN 8, EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose Longlife, 15 m, ID 8, 400 bar, 2 × EASY!Lock	139	6.110-029.0	The double steel core ensures a particularly long life of this 15 m long high-pressure hose (DN 8), which is approved for pressures up to 400 bar.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × M22 × 1.5	140	6.390-027.0	with rotary coupling, 2 × M 22 × 1.5	☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA

1.509-923.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 30 m, ID 8, 400 bar, 2 × M22 × 1.5	141	6.390-294.0	With rotary coupling, 2 × M 22 × 1.5	☐
Food industry version with unions on both sides				
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × EASY!Lock	142	6.110-051.0	High-pressure hose (ID 6), 10 m long, with grey, non-marking outer covering. Approved for use in the food industry. With EASY!Lock hand screw connection at both ends.	☐
High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × EASY!Lock	143	6.110-052.0	Suitable for use in food industry: 20 m long high-pressure hose (ID 8) with grey, non-marking outer covering, ANTI!Twist and EASY!Lock hand screw connections.	☐
Longlife food design				
High-pressure hose food grade, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	144	6.110-075.0		☐
Longlife food design with screw connections at both ends				
High-pressure hose food grade Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	145	6.110-053.0	With blue, non-marking and animal fat-resistant outer covering: High-pressure hose (ID 8), 10 m long, with ANTI!Twist and EASY!Lock hand screw connection at both ends.	☐
High-pressure hose food grade Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	146	6.110-054.0	High-pressure hose with double steel reinforcement and blue, non-marking and animal fat-resistant outer covering. 20 m long with EASY!Lock hand screw connections.	☐
High-pressure hose food grade, 10 m, ID 8, 400 bar, 2 × M22 × 1.5	147	6.391-864.0	Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 × M 22 × 1,5	☐
Special hoses				
High-pressure hose Ex, 10 m, ID 8, 400 bar, 2 × EASY!Lock	148	6.110-064.0	Electrically conductive, 10 m long high-pressure hose for use in hazardous areas. 10 m long high-pressure hose with EASY!Lock hand screw connections at both ends.	☐
High-pressure hose curved, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	149	6.110-068.0	For connection to hose reels: high-pressure hose, with M 22 × 1.5 connection and curved EASY!Lock hand screw connection. 1.5 m long, suitable for up to 400 bar working pressure.	☐
Classic				
High-pressure hose Classic, 10 m, ID 8, 315 bar × , EASY!Lock	150	4.119-005.0	High pressure hose with convenient EASY!Lock manual fitting from the Classic series by Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Hose TR DN8 31,5MPa 20m with package, 20 m, ID 8, 315 bar × , EASY!Lock	151	4.119-006.0		☐
Hose assembly with package TR DN8 max31,, 15 m, ID 8, 315 bar × , EASY!Lock	152	4.119-017.0		☐
Hose assembly with package TR DN10 25MPa, 20 m, ID 10, 250 bar × , EASY!Lock	153	4.119-019.0		☐
Hose assembly with package TR DN10 25MPa, 40 m, ID 10, 250 bar × , EASY!Lock	154	4.119-020.0		☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA

1.509-923.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Classic				
Hose with transport packaging, 10 m, ID 8, 315 bar × , M22 × 1.5	155	4.760-834.0	High-pressure hose with M22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Hose with transport packaging, 10 m, ID 10, 250 bar × , M22 × 1.5	156	4.760-835.0		☐
Hose M DN8 31,5MPa 20m with package, 20 m, ID 8, 315 bar × , M22 × 1.5	157	4.760-857.0		☐
Hose assembly with package M22 DN10 25MP, 20 m, ID 10, 250 bar × , M22 × 1.5	158	4.760-892.0		☐
Hose assembly with package M22 DN10 25MP, 40 m, ID 10, 250 bar × , M22 × 1.5	159	4.760-893.0		☐
PIPE CLEANING				
Pipe cleaning hose, ID 6				
Pipe cleaning hose, ID 6, 10 m, max. 250 bar	160	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, ID 6, 20 m, max. 250 bar	161	6.110-008.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, ID 6, 30 m, max. 250 bar	162	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 20 m, max. 250 bar	163	6.390-030.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning nozzle				
Pipe cleaning nozzle 080	164	5.763-087.0	Pipe cleaning nozzle with 24 mm diameter. With 4 nozzles tilted back at a 30° angle.	☐
Pipe cleaning nozzle 100	165	5.763-088.0		☐
Pipe cleaning nozzle 120	166	5.763-089.0	Pipe cleaning nozzle with 24 mm diameter. With 8 nozzles tilted back at a 30° angle.	☐
Pipe cleaning nozzle	167	5.763-015.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for cleaning blocked drains and pipes.	☐
	168	5.763-019.0		☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA

1.509-923.0



		Order no.	Description	
PIPE CLEANING				
Pipe cleaning nozzle				
Pipe cleaning nozzle	169	5.763-021.0	30 mm pipe cleaning nozzle with internal thread. Various jet directions for cleaning blocked drains and pipes.	☐
FLOOR AND HARD SURFACE CLEANER				
FR Classic surface cleaner				
Surface cleaner medium M with package	170	4.760-876.0	Designed for hot water applications up to max. 100 °C: Classic surface cleaner made of metal with HP trigger gun, 500 mm diameter, and nozzle kit (2 × nozzle size 025; others can be ordered separately).	☐
Hard Surface Cleaner FRV 30				
FRV 30 Surface Cleaner	171	2.111-010.0	Integrated automatic suction removes dirty water through the supplied 5 m suction hose, eliminating the need to rinse the surface after cleaning and allowing use in inside and outside areas. Features include non-marking steering rollers and double ceramic bearings. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1000 l/h / 60 °C.	☐
FRV 30 surface cleaner	172	2.642-999.0	Integrated automatic suction removes dirty water through the supplied 5 m suction hose, eliminating the need to rinse the surface after cleaning. Features include non-marking steering rollers and double ceramic bearings. Machine-specific nozzle kit must be ordered separately.	☐
Hard surface cleaner FR 30				
FR 30 Surface Cleaner	173	2.111-011.0	Up to 10 times greater area performance compared with the conventional high-pressure jet. Plastic casing for optimal manoeuvrability, double ceramic bearing for long working times, flexible connection joint for optimal handling and integrated parking position. Machine-specific nozzle kit must be ordered separately. Max. 180 bar / 850 l/h / 60°C.	☐
Surface Cleaner FR 30	174	2.642-997.0	Up to 10 times greater area coverage compared with the conventional high pressure jet. Plastic casing for optimal manoeuvrability, double ceramic bearing for long working times, flexible connection joint for ergonomic handling and integrated parking position. Machine specific nozzle kit must be ordered separately.	☐
FR 30 Me surface cleaner				
Hard Surface Cleaner FR 30 Me	175	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	☐
Hard surface cleaner FR 30 Me	176	2.640-355.0		☐
Hard Surface Cleaner FR 50				
Surface Cleaner FR 50 Me	177	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	☐
Hard surface cleaner FR 50	178	2.640-679.0		☐
Machine-specific nozzle kits for FR				
Nozzle kit for FR, 850 l/h - 1100 l/h	179	2.640-442.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (850 to 1100 l/h).	☐
Nozzle kit for FR, 1100 l/h - 1300 l/h	180	2.639-188.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (1100 to 1300 l/h).	☐
Nozzle kit for FR, 1300 l/h - 1800 l/h	181	2.640-781.0	Machine-specific nozzle kit Kärcher power nozzle for hard surface cleaners	☐
Machine-specific nozzle kits for FRV				
Nozzle kit for FRV, 080	182	2.642-982.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA


1.509-923.0



		Order no.	Description	
FLOOR AND HARD SURFACE CLEANER				
Machine-specific nozzle kits for FRV				
Nozzle kit for FRV, 100	183	2.643-769.0	Machine-specific nozzle kit Kärcher power nozzles and jet nozzle for FRV 30 and FRV 50.	☐
Nozzle kit for FRV, 125	184	2.643-768.0		☐
FRV 30 Me surface cleaner				
FRV 30 Me Surface Cleaner	185	2.111-012.0	The stainless steel FRV 30 Me Surface Cleaner is designed for hot water cleaning up to 85 °C in inside and outside areas. Integrated automatic suction removes dirty water directly during operation.	☐
FRV 30 Me	186	2.642-911.0		☐
Surface Cleaner FR 50 Me				
FRV 50 Me surface cleaner	187	2.111-024.0	Surface cleaning with automatic suction of the dirty water for very large surfaces – this means the FRV 50 Me. Hot water cleaning up to 85°C. The FRV 50 Me features a temperature-resistant 10 m polyurethane suction hose. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 2000 l/h / 85°C.	☐
FRV 50 ME	188	2.643-598.0	The stainless steel FRV 50 Me surface cleaner is designed for hot water cleaning up to 85 °C in inside and outside areas. Integrated automatic suction removes waste water directly during operation. The FRV 50 Me features a temperature-resistant 7.5 m polyurethane suction hose, non-marking steering rollers, and a double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1,300 l/h / 85 °C.	☐
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Advanced 3, 900 l/h – 2500 l/h	189	4.112-065.0	Specially designed for use with aggressive cleaning agents: High-quality cup foam lance Advanced 3 with spray angle adjustment and Ecobrass for high-pressure cleaners from Kärcher.	☐
Cup foam lance DUO Advanced 3, 900 l/h – 2500 l/h	190	4.112-069.0	DUO Advanced 3 cup foam lance, designed for use with aggressive detergents. With instant switching to high-pressure cleaning, spraying angle adjustment and two-litre tank.	☐
Cup foam lance Basic 3, 900 l/h – 2500 l/h	191	4.112-055.0	Basic 3 cup foam lance for high-pressure cleaners with a flow rate of 900–2500 l/h: Reduces cleaning agent consumption by 50% compared to cup foam lances without a dosing facility.	☐
Inno Foam Kit				
Inno Foam Set with detergent injector	192	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	☐
Inno Foam Set	193	2.112-008.0		☐
Inno Foam Set with detergent injector	194	2.640-151.0		☐
Easy Foam Set				
Easy Foam Set with RM injector	195	2.112-010.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	☐
Easy Foam Set	196	2.112-011.0		☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA 1.509-923.0

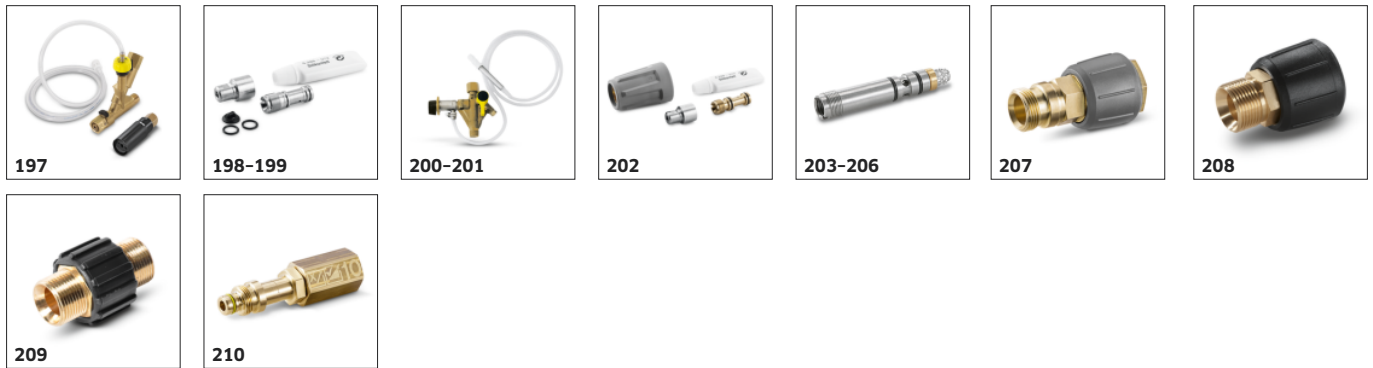

		Order no.	Description	
FOAM SYSTEMS				
Easy Foam Set				
Easy Foam Set with RM injector	197	2.640-691.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	☐
Nozzle kits for Inno/Easy Foam Set				
Nozzle kit 090 for Inno / Easy Set 700-1,000 l/h	198	2.111-019.0	Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	☐
Nozzle kit 110 for Inno / Easy Set 1,000-1,300 l/h	199	2.111-020.0	Nozzle kit 110 contains Kärcher power nozzles and nozzle inserts. For Inn/Easy-Foam set 1000-1300 l/h. For optimal foam system performance.	☐
MIXERS AND INJECTORS				
Cleaning agent injector				
Cleaning agent injector for high and low pressure (without nozzles)	200	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	☐
	201	3.637-001.0		☐
Machine-specific nozzle kit with order no. 4.637-033.0				
Nozzle kit HD 500-700 l/h	202	4.769-005.0	For HD 500 - 700 l/h. Consists of nozzle insert + HP power nozzle + union	☐
Nozzle insert with order no. 4.637-032.0				
Nozzle insert up to 1,100 l/h - high pressure	203	4.769-003.0	Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	☐
Nozzle insert from 1,100 l/h - HD	204	4.769-002.0	For high pressure with machines above 1.100 l/h	☐
Nozzle insert up to 1,100 l/h - low pressure	205	4.769-001.0	For low pressure with machines up to 1.100 l/h	☐
Nozzle insert from 1,100 l/h - ND	206	4.769-006.0	For low pressure with machines above 1.100 l/h	☐
COUPLING PARTS				
Rotary coupling				
Rotary coupling	207	4.111-021.0	Reliably prevents twisting of HP hoses. Connection Easy!Lock. Handle protection	☐
	208	4.401-091.0	Reliably prevents twisting of HP hoses. Connection M 22 × 1.5 m. Handle protection	☐
Coupling				
Coupler -2 × M22 × 1,5	209	4.403-002.0	For connecting and extending high-pressure hoses. Connection 2 × M 22 × 1.5.	☐
Connector				
Screw socket for surface cleaners and Servo Control controllers	210	4.111-022.0	For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) - 1 × M 22 × 1.5/1 × M 18 × 1.5.	☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA

1.509-923.0



		Order no.	Description	
COUPLING PARTS				
Connector				
Y distributor	211	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐
Short spray unit	212	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	☐
Y distributor	213	4.405-048.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐
EASY!Lock adapter				
Adapter 1 M22AG-TR22AG	214	4.111-029.0	Adapter 1 to connect the old hose with the new hose	☐
Adapter 2 M22IG-TR22AG	215	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	☐
Adapter 3 M22IG-TR22AG	216	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	☐
Adapter 4 TR22IG-D11	217	4.111-032.0	Adapter 4 to connect the new gun with the old swivel hose	☐
Adapter 5 TR22IG-M22AG	218	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	☐
Adapter 6 TR22IG-M22AG	219	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	☐
Adapter 7 M18IG-TR20AG	220	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	☐
Adapter 8 TR20IG-M18AG	221	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	☐
Adapter hose extension 9 TR	222	4.111-037.0	Adapter 9 to connect the new hose with the new hose	☐
Adapter 12 rotary coupling EASY!Lock 22 IG - M22 x 1.8 AG	223	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	☐
HOSE REELS				
Automatic, self-winding hose reels for wall mounting				
Automatic hose reel, powder-coated steel / plastic, 20 m	224	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA

1.509-923.0



		Order no.	Description	
HOSE REELS				
Automatic, self-winding hose reels for wall mounting				
Automatic stainless steel / synthetic material hose drum, 20 m	225	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	☐
Automatic hose reel, coated, 20 m	226	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	☐
Hose reel, automatic, basalt grey-coated, 20 m	227	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. For example: order no. 6.110-011.0 (ID 8, 20 m, 315 bar) or order no. 6.110-028.0 (ID 8, 20 m, 400 bar Longlife).	☐
Automatic hose reel, stainless steel, includes swivel holder, 20 m	228	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	☐
Automatic stainless steel hose reel, 40 m	229	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	☐
DRUM AND TANK CLEANING				
Barrel and tank cleaning				
Spray head HKF 30/14-E	230	6.751-061.0	Compact interior cleaning head made of stainless steel for cleaning the interiors of drums and containers with openings of 65 mm or more. Offers an impressively low weight and constant rotation speed by means of an electric motor.	☐
STATIONARY HIGH-PRESSURE CLEANING SYSTEMS				
ABS covering HDC/3 VA	231	3.641-036.0		☐
Hot water attachment kit for HDC 60 & HDC 80	232	4.640-811.0	The hot water attachment kit, which includes an advance pressure pump for the HDC 60/16 and HDC 80/16 high-pressure cleaners, enables the use of hot water with an inlet temperature of up to 85 °C.	☐
Nozzle	233	4.769-010.0		☐
Trigger gun	234	4.775-018.0		☐
Double connecting	235	5.402-001.0		☐
High-pressure ball valve	236	6.412-066.0		☐
Quick release coupling	237	6.463-022.0		☐
STATIONARY HIGH-PRESSURE CLEANERS				
Full-bore valve	238	6.412-022.0		☐

☐ Available accessories.

ACCESSORIES FOR HDC 60/16 VA 1.509-923.0



		Order no.	Description	
STATIONARY HIGH-PRESSURE CLEANERS				
High-pressure ball valve	239	6.412-068.0		☐
High-pressure ball valve, stainless steel, G1/2"	240	6.413-500.0	High-pressure ball valve made of stainless steel. Nominal size DN 13, nominal pressure PN 400 for a temperature range up to 100 °C. Connection G1/2" internal thread.	☐
Dual dosing unit, stainless steel	241	2.641-702.0	Dual dosing unit, stainless steel.	☐
Wall bracket for 2 × cleaning agent cans, stainless steel	242	2.641-703.0	Wall bracket for two cans.	☐
Mobile cleaning trolley with dual dosing unit and hose reel	243	2.641-704.0	Mobile cleaning trolley.	☐
COMMERCIAL VEHICLE CLEANING				
Under chassis wash				
Additional remote control with illuminated button	244	4.812-068.0		☐
SELF-SERVICE WASHING SYSTEMS AND EQUIPMENT				
Wash bay equipment				
360° swivelling boom for high-pressure hose	245	4.058-106.0	Swivelling boom for HP-working hose (360° turning circle). Mounted above the washing bay.	☐
Miscellaneous				
Swinging boom 180°, wall-mounted	246	2.637-120.0	Ideal for stationary HD/HDS machines from Kärcher, e.g. in washing bays: wall-mounted swivelling boom with 180° outreach for holding the high-pressure hose.	☐

☐ Available accessories.