

HD 10/19-4 ST H

Easy-to-operate, stationary high-pressure cleaner with a high flow volume of 1,000 l/h. Robust and high-quality equipment – ideal for agriculture or the food industry.



Order no. 1.524-967.0

- 4-pole air-cooled motor and robust crankshaft pump with ceramic piston
- Easy installation, operation and maintenance of the machine

Technical data

EAN code		4066529057181
Number of current phases	Ph	3
Voltage	V	400
Frequency	Hz	50
Flow rate	l/h	500 - 1000
Working pressure	bar / MPa	50 - 190 / 5 - 19
Max. pressure	bar / MPa	250 / 25
Inlet temperature	°C	85
Connected load	kW	7
Protection	A	16
Power cable	m	5
Water inlet		1"
Number of users		1
Portability		stationary
Weight (with accessories)	kg	89
Weight incl. packaging	kg	98.8
Dimensions (L × W × H)	mm	800 × 605 × 600

Scope of supply

Servo Control
Power nozzle
Frame and cover: Stainless steel
Prepared for Servo Control
Pre-equipped for a detergent inlet

Equipment


Crankshaft pump with ceramic pistons
Advance pressure pump
Calcification protection
Dry-running protection
Large water fine filter
Storage tank with float valve
Prepared for remote operation
RM1 dosage
Sight glass for oil level
Oil dipstick
Air-cooled motor

This machine requires instruction.



High-quality equipment

- Storage tank with valve, limescale protection and dry-running protection.
- Very robust stainless steel frame and cover.
- Ready for connection of remote controls.

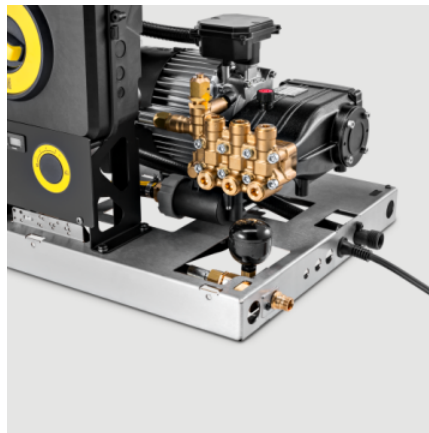

Durable and robust


- Very robust stainless steel frame and cover.
- 4-pole, slow-running electric motor guarantees a long working time.
- 15 kW Kärcher crankshaft pump



Electronic monitoring for greater operational safety.

- Switch off in the event of water shortage, LEDs: standby, service, error.
- Automatic switch-off in case of low voltage range or overvoltage.
- Switches off in case of leaks or phase failure.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0

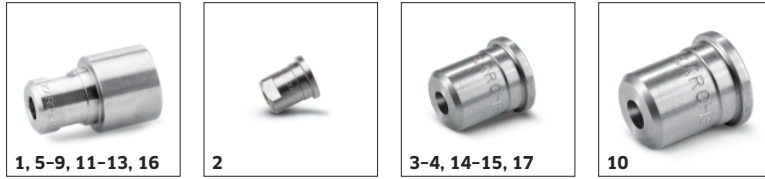

		Order no.	Description	
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 25°				
Power nozzle , 054	1	2.113-011.0	Flat jet nozzle for large area performance and stubborn dirt.	■
	2	2.883-927.0		□
Power nozzle , 055	3	2.883-401.0	Fan jet nozzle for large area coverage and stubborn dirt and stains.	□
Power nozzle , 060	4	2.883-402.0	Flat stream large area coverage and stubborn dirt and contaminations.	□
Power nozzle , 055	5	2.113-025.0	Flat jet nozzle for large area performance and stubborn dirt.	□
Power nozzle , 060	6	2.113-026.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains.	□
Power nozzle , 062	7	2.113-012.0		□
Power nozzle 25°, 065	8	2.113-061.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	□
HP nozzle spray angle 0°				
Power nozzle 0°, 055	9	2.113-035.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	□
	10	2.884-536.0		□
Power nozzle 0°, 060	11	2.113-036.0	Solid jet for very stubborn dirt and stains.	□
Power nozzle spray angle 15°				
Power nozzle 15°, 055	12	2.113-047.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	□
Power nozzle 15°, 060	13	2.113-048.0	Fan jet nozzle for stubborn dirt and stains.	□
Power nozzle 15°, 055	14	2.883-390.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	□

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 15°				
Power nozzle 15°, 060	15	2.883-391.0	Fan jet nozzle for stubborn dirt and stains.	☐
Power nozzle spray angle 40°				
Power nozzle 40°, 055	16	2.113-055.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	☐
	17	2.884-525.0		☐
TRIGGER GUNS				
Spray guns				
Pistol TR 155°C with package	18	4.119-002.0	Classic spray gun with valve. Also suitable for Kärcher hot water high-pressure cleaners.	☐
EASY!Force Advanced	19	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	☐
EASY!Force Food	20	4.118-015.0	Perfect for the food industry: the EASY!Force high-pressure gun with full ceramic valve enables fatigueless working due to virtually zero holding force for the operator.	☐
High-End HD Trigger Gun	21	4.118-011.0	Trigger gun for professional use in the food industry and general industrial applications. Designed for water flow rates of up to 2500 l/h.	☐
Servo control				
Servo Control, 750 l/h – 1100 l/h	22	4.118-008.0	Water quantity and pressure regulated directly from the hand spray gun.	☐
Servo Control, food, 750 l/h – 1100 l/h	23	4.118-016.0	Water flow and pressure control on the trigger gun. Food-grade, parts in contact with water are stainless steel.	☐
Servo Control, 750 l/h – 1100 l/h	24	4.775-470.0	Water flow and pressure control on the trigger gun.	☐
Servo Control, stainless steel version, 750 l/h – 1100 l/h	25	4.775-800.0	Water volume and pressure regulation directly from the spray gun. Version for the food industry, water-carrying components made from stainless steel.	☐
SPRAY LANCES				
Rotating spray lances				
Jet pipe with transport packaging, 840 mm	26	4.119-003.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Spray lance Classic EASY!Lock, 1050 mm	27	4.119-008.0	High-pressure spray lance with EASY!Lock screw connections from the Classic series from Kärcher. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe TR 600mm with package, 600 mm	28	4.119-009.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
SPRAY LANCES				
Rotating spray lances				
Jet pipe Classic TR 100mm, 100 mm	29	4.119-013.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe Classic TR 200mm, 200 mm	30	4.119-014.0		☐
Jet pipe Classic TR 400mm, 400 mm	31	4.119-015.0		☐
LED nozzle light	32	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	☐
Spray lance, 250 mm, rotatable	33	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	☐
Spray lance, 400 mm, rotatable	34	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	☐
Spray lance, 600 mm, rotatable	35	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	36	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1050 mm, rotatable	37	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1550 mm, rotatable	38	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	39	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 600 mm, rotatable	40	4.760-664.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	41	4.760-663.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1050 mm, rotatable	42	4.760-660.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
SPRAY LANCES				
Rotating spray lances				
Spray lance, 1550 mm, rotatable	43	4.760-661.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	44	4.760-662.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance				
Spray lance Classic 1,050 mm	45	4.760-855.0	High-pressure spray lance with M 22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Jet pipe 600mm with package	46	4.760-856.0		☐
Jet pipe Classic M 840mm	47	4.760-895.0		☐
Undercarriage spray lance				
Underbody lance	48	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	☐
Additional handle				
Additional handle for EASY!Lock spray lances	49	4.321-380.0	Comfortable in every situation – the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task. Regularly changing your posture relieves the strain on your body, making work more relaxed. Thanks to the 360°-rotatable spray lance, the additional handle can simply be fully rotated whilst working for greater flexibility.	☐
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt Blaster, small				
Dirt blaster, 050	50	4.767-233.0	Full power against stubborn dirt: the new performance dirt blaster with nozzle size 050 achieves up to 50% higher cleaning and area performance than its predecessor.	☐
Dirt blaster, large				
Dirt blaster Vibrasoft, 050	51	4.114-066.0	Vibrasoft rotary nozzle with rotating pencil jet.	☐
Dirt blaster, large, 050	52	4.114-027.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	☐
Dirt blaster, 050	53	4.763-253.0		☐
Dirt blaster, large, 055/060	54	4.114-036.0		☐
Dirt blaster, 055/060	55	4.763-250.0		☐
Classic rotary nozzle				
Rotor nozzle TR 060	56	4.119-025.0	The powerful rotating point jet of the Classic rotary nozzle from Kärcher ensures the best possible cleaning results and is suitable for water temperatures of up to 60 °C.	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H


1.524-967.0



		Order no.	Description	
ROTARY NOZZLES (DIRT BLASTERS)				
Classic rotary nozzle				
Rotary nozzle M 050 with package	57	4.760-870.0	The powerful rotating point jet of the Classic rotary nozzle from Kärcher ensures the best possible cleaning results and is suitable for water temperatures of up to 60 °C.	☐
Rotary nozzle M 060 with package	58	4.760-871.0		☐
ECO!BOOSTER				
eco!Booster TR 050	59	2.113-088.0	eco!Booster with 50% higher area performance than the Kärcher power nozzle; ideal for delicate surfaces. For cold and hot water high-pressure cleaners (nozzle size 050).	☐
Eco!Booster MAX TR 050	60	2.113-097.0	eco!Booster MAX: 100 percent higher area performance compared to the Kärcher standard flat jet nozzle.	☐
Eco!Booster TR 060	61	2.113-090.0	eco!Booster with 50% higher area performance compared to the Kärcher power nozzle; ideal for delicate surfaces. Suitable for cold and hot water high-pressure cleaners with a nozzle size of 060.	☐
Eco!Booster MAX TR 060	62	2.113-098.0	eco!Booster MAX: 100 percent higher area performance compared to the Kärcher standard flat jet nozzle.	☐
QUICK CONNECT				
Quick coupling	63	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	☐
Male coupling	64	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread.	☐
Quick coupling	65	6.401-458.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	☐
Male coupling	66	6.401-459.0	Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 × 1.5 external thread.	☐
TAKE-OFF POINT EQUIPMENT				
Hose and spray lance holder VA	67	2.042-003.0	Hose and spray lance wall holder for practical and safe storage of high-pressure hoses or spray lances. Stainless steel wall holder.	☐
REMOTE CONTROL				
Emergency stop switch - for installation in remote control 2.744-015	68	6.635-434.0		☐
	69	6.651-485.0		☐
Remote release button	70	2.637-491.0	Remote release button for stationary high-pressure cleaners from Kärcher: resets the switch-off after 30 minutes of continuous operation or continuous pause.	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0

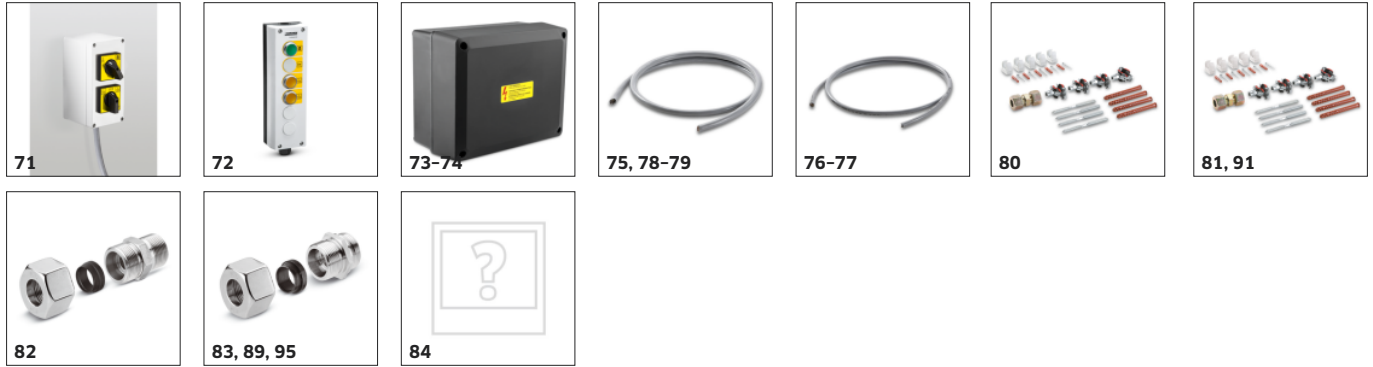

		Order no.	Description	
REMOTE CONTROL				
Remote control I/O, RM 1/2	71	2.744-014.0	Remote control for controlling a stationary cold water high-pressure cleaner. Functions: on/off and dosing of up to two detergents (RM1/RM2).	☐
Multi-key remote control, I/O, RM 1/2	72	2.744-015.0	Multi-key remote control for switching on and off and dosing up to two detergents (RM1/RM2). In conjunction with E-box 2.744-018.0.	☐
Add-on kit remote control 1 for HD-HDS-Stationary	73	2.744-017.0	Preparation for connecting rotary switch remote controls and emergency stop buttons to stationary cold and hot water high-pressure cleaners from Kärcher.	☐
Add-on kit remote control 2 for HD-HDS-Stationary	74	2.744-018.0	Preparation for connecting push-button remote controls and emergency stop buttons to stationary cold and hot water high-pressure cleaners from Kärcher.	☐
CONTROL CABLE				
Control cable	75	6.647-222.0	Connection cable available as bulk stock (12 × 1.0 mm ²) for use as control cable. For all stationary HD/HDS machines from Kärcher.	☐
Control cable 3 × 1.5 mm ²	76	6.641-059.0	Connecting cable 3 × 1.5 mm ² . Available by the meter.	☐
Control cable 5 × 1.5 m	77	6.641-061.0	Control cable 5 × 1.5	☐
Control cable 7 × 1.5 m	78	6.641-064.0	Control cable 7 × 1.5	☐
Control cable 10 × 1.5 m	79	6.641-082.0	Control cable 10 × 1.5	☐
Conduit	80	2.420-008.0	Conduit for control cable installation. Consisting of 3 m conduit, 5x conduit clips, 5x dowels, 5x screws.	☐
HIGH-PRESSURE PIPEWORK				
High-pressure pipe kit	81	2.420-006.0	High-pressure pipe kit with 3 m stainless pipe Ø 16 × 2 mm, ID 12 and mounting accessories: compression fitting, 4 pipe clamps, 4 hanger bolts and 4 plastic dowels.	☐
Connection piece, pipe/HP hose, stainless steel (Ermeto)	82	2.638-181.0	Stainless steel	☐
Connection piece, pipe/stop cock, stainless steel (Ermeto)	83	2.638-183.0	For stationary HD/HDS machines: Stainless steel transition piece comprising double nipple, union nut and cutting ring. For connecting the pipe to the shut-off valve.	☐
Stop cock, stainless steel (Ermeto)	84	4.580-163.0	Stainless steel shut-off valve with M 22 × 1.5 thread suitable for connecting pipeline and high-pressure hose for stationary high-pressure systems from Kärcher.	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
HIGH-PRESSURE PIPEWORK				
Union nut, stainless steel (Ermeto)	85	6.386-428.0	(VA)	☐
T-screw connection, stainless steel (Ermeto)	86	6.386-465.0	Stainless steel	☐
Stainless steel elbow union 90°	87	6.386-466.0	Stainless steel elbow union 90° with compression fitting (Ermeto) at both ends for 16 mm pipes.	☐
Quick coupling, loose part, M 22 × 1.5	88	6.463-023.0	loose part	☐
Connector, galvanised steel	89	2.638-180.0	Alternativ : stainless steel 2.638-181	☐
Shut-off valve, galvanised steel	90	4.580-144.0	Shut-off valve made from zinc-coated steel for stationary high-pressure systems from Kärcher. For connecting the pipeline to the high-pressure hose.	☐
Pipe kit, galvanised steel, 3 m	91	2.420-004.0	High-pressure pipe kit with 3 m galvanised steel pipe Ø 16 × 2.5 mm, DN 11 and fixing accessories: Compression fitting, 4 pipe clamps, 4 hanger bolts and 4 plastic dowels.	☐
Tee, galvanised steel	92	6.386-269.0	Tee (90°), galvanised steel with compression fitting for 16 mm pipes. Fixing material (Ermeto) included.	☐
Elbow union, galvanised steel	93	6.386-356.0	Elbow union, galvanised steel. With 90° angle piece with compression fitting (Ermeto) at both ends for 16 mm pipes.	☐
Pipe insulation, per running meter	94	6.286-147.0	For thermal insulation of pipes. Pipe cladding. Wall thickness 9 mm. PE foam with moisture barrier. Available per running meter.	☐
Adapter piece, galvanised steel	95	2.638-182.0	Alternative: stainless steel 2.638-183	☐
Quick-release coupling, fixed part	96	6.463-025.0	fixed part	☐
Union nut, galvanised steel	97	6.386-423.0	Union nut, galvanised steel. For 16 mm compression fitting.	☐
Cutting ring	98	6.386-357.0	Galvanised steel cutting ring. For 16 mm compression fitting.	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
PLANT INSTALLATION				
Fine-mesh water filter	99	2.209-806.0	Fine-mesh water filter	☐
Emergency Stop switch	100	2.744-002.0	Emergency Stop switch with ISO housing for wall mounting. With 0.4 m power cord and fixing material.	☐
HOSE TRACK SYSTEM HIGH-PRESSURE CLEANERS				
C-rail holder	101	6.541-027.0	Wall-mounted C-rail holding clamp for hose guide of Kärcher high-pressure cleaners.	☐
C-rail, per running metre	102	6.233-017.0	C-rail profile as a guide track. 30x32 mm, 2 mm wall thickness 1.56 kg/m. Available per running metre.	☐
Rail connector	103	6.541-011.0	Rail connector	☐
End stop	104	6.541-025.0	End stop	☐
Cable trolley	105	6.541-026.0	Cable trolley for C-rail profile. 20 kg capacity. Weight 0.11 kg. Galvanised steel ball bearing.	☐
End bracket	106	6.541-028.0	End bracket	☐
Handle	107	6.541-029.0	C-rail profile clamp. Galvanised steel. Plastic clamping parts. Weight 0.06 kg.	☐
Wall bracket	108	6.541-039.0	Wall holder for galvanised steel C-rail profile.	☐
Rail holder wall	109	6.541-012.0	Galvanised steel rail bracket for C-rail profile. Weight 0.235 kg.	☐
Spray lance runner, movable	110	4.042-610.0	moveable	☐
SEALS FOR TRAPEZOIDAL THREAD				
Gasket set with 9x O-rings for TR thread	111	2.880-001.0		☐
NOZZLE UNION / SPACER				
Nozzle union				
Nozzle screws	112	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
NOZZLE UNION / SPACER				
Nozzle union				
Nozzle connector	113	5.401-210.0	For protecting and connecting Kärcher power nozzles to spray lances (M 18 × 1.5 IG).	☐
Nozzle union food industry	114	5.401-318.0	Made of special brass alloy for use in the food industry.	☐
HIGH-PRESSURE HOSES				
Standard				
High-pressure hose, 20 m, ID 8, 315 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	115	6.110-011.0	High-pressure hose with AVS hose reel connection and EASY!Lock hand screw connection.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	116	6.110-019.0	High-pressure hose (DN 8) with EASY!Lock manual screw fitting on both sides. Suitable for pressures up to 315 bar. Length: 10 m.	☐
High-pressure hose, 15 m, ID 6, 300 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	117	6.110-026.0	For up to 300 bar working pressure: 15 m long high-pressure hose (ID 6) with AVS connection for hose reels and EASY!Lock hand screw connection.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	118	6.390-025.0	10 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	119	6.390-185.0	15 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	120	6.390-171.0	20 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
Standard with unions on both sides				
High-pressure hose, 15 m, ID 8, 315 bar, 2 × M22 × 1.5	121	6.390-010.0	With screw connections on both sides, M 22 × 1.5 with bend protection.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 2 × M22 × 1.5	122	6.390-031.0	Screw connections at both ends, M 22 × 1.5, with kink protection.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	123	6.110-031.0	High-pressure hose (DN 8) suitable up to 315 bar pressure. With innovative EASY!Lock manual screw fitting on both sides, ANTI!Twist and 10 m long.	☐
High-pressure hose, 15 m, ID 8, 315 bar	124	6.110-033.0	15 m high-pressure hose, DN 8, fitted with EASY!Lock manual screw connections at both ends.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 2 × EASY!Lock	125	6.110-030.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 2 × EASY!Lock	126	6.110-032.0	High-pressure hose (DN 8) with a length of 20 m and EASY!Lock manual screw fitting on both sides. Approved for max. 315 bar pressure.	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
High-pressure hose, 30 m, ID 8, 315 bar, 2 × EASY!Lock	127	6.110-014.0	Comfortable length (30 m) and innovative EASY!Lock manual screw fitting: High-pressure hose (DN 8) with ANTI!Twist for pressures up to 315 bar.	☐
Longlife 400				
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	128	6.110-028.0	20 m high-pressure hose (ID 8), for up to 400 bar pressure. With AVS hose reel connection and double steel reinforcement. EASY!Lock hand screw connection at other end of the hose.	☐
High-pressure hose Longlife, 40 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	129	6.110-076.0	High-pressure hose with 2-compartment steel insert, AVS hose reel connection, as well as EASY!Lock manual screw connection.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	130	6.390-208.0	20 m high-pressure hose Longlife 400 (DN 8) with patented (rotating) AVS trigger gun connector and manual coupling. Two layer high-strength steel wire reinforced.	☐
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × EASY!Lock	131	6.110-024.0	1.5 m high-pressure hose (DN 8) with EASY!Lock manual screw fitting on both sides. Designed for max. 400 bar pressure.	☐
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	132	6.110-069.0	1.5 m long high-pressure hose (DN 8) suitable for up to 400 bar pressure with double steel core. Connections: M 22 × 1.5, as well as the comfortable and quick EASY!Lock manual screw fitting.	☐
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × M22 × 1.5	133	6.390-178.0	1.5 m high-pressure hose (DN 8, M 22 × 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 × 1.5).	☐
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	134	6.110-038.0	10 m long high-pressure hose (DN 8) with double steel core, EASY!Lock manual screw fitting on both sides, and ANTI!Twist. Approved for max. 400 bar pressure.	☐
High-pressure hose Longlife, 30 m, ID 8, 400 bar, 2 × EASY!Lock	135	6.110-023.0	High-pressure hose with double steel core, ANTI!Twist and EASY!Lock manual screw fitting on both sides. Nominal size DN 8, 30 m long, approved for max. 400 bar pressure.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	136	6.110-027.0	High-pressure hose with ANTI!Twist, EASY!Lock manual screw fittings and double steel core. 20 m long, nominal size DN 8, EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose Longlife, 15 m, ID 8, 400 bar, 2 × EASY!Lock	137	6.110-029.0	The double steel core ensures a particularly long life of this 15 m long high-pressure hose (DN 8), which is approved for pressures up to 400 bar.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × M22 × 1.5	138	6.390-027.0	with rotary coupling, 2 × M 22 × 1.5	☐
Food industry version				
High-pressure hose food grade, 15 m, ID 6, 250 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	139	6.110-074.0	15 m long high-pressure hose (ID 6), food grade, with AVS hose reel connection, EASY!Lock hand screw connection and grey, non-marking outer covering.	☐
High-pressure hose food grade, 15 m, ID 6, 250 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	140	6.391-654.0	15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Food industry version with unions on both sides				
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × EASY!Lock	141	6.110-051.0	High-pressure hose (ID 6), 10 m long, with grey, non-marking outer covering. Approved for use in the food industry. With EASY!Lock hand screw connection at both ends.	☐
High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × EASY!Lock	142	6.110-052.0	Suitable for use in food industry: 20 m long high-pressure hose (ID 8) with grey, non-marking outer covering, ANTI!Twist and EASY!Lock hand screw connections.	☐
Longlife food design				
High-pressure hose food grade, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	143	6.110-075.0		☐
Longlife food design with screw connections at both ends				
High-pressure hose food grade Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	144	6.110-053.0	With blue, non-marking and animal fat-resistant outer covering: High-pressure hose (ID 8), 10 m long, with ANTI!Twist and EASY!Lock hand screw connection at both ends.	☐
High-pressure hose food grade Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	145	6.110-054.0	High-pressure hose with double steel reinforcement and blue, non-marking and animal fat-resistant outer covering. 20 m long with EASY!Lock hand screw connections.	☐
Special hoses				
High-pressure hose Ex, 10 m, ID 8, 400 bar, 2 × EASY!Lock	146	6.110-064.0	Electrically conductive, 10 m long high-pressure hose for use in hazardous areas. 10 m long high-pressure hose with EASY!Lock hand screw connections at both ends.	☐
High-pressure hose curved, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	147	6.110-068.0	For connection to hose reels: high-pressure hose, with M 22 × 1.5 connection and curved EASY!Lock hand screw connection. 1.5 m long, suitable for up to 400 bar working pressure.	☐
High-pressure hose curved, 1.5 m, ID 8, 400 bar, 2 × M22 × 1.5	148	6.388-886.0	Connection hose in longlife quality with 2x M22 × 1.5, with angled connection on one side.	☐
Ultra Guard				
High-pressure hose Ultra Guard, 20 m, ID 8, max. 315 bar	149	6.110-083.0	Ultra Guard high-pressure hose with smooth, abrasion-resistant coating. Hose line designed for demanding cleaning operations.	☐
Classic				
High-pressure hose Classic, 10 m, ID 10, 250 bar × , EASY!Lock	150	4.119-004.0	High pressure hose with convenient EASY!Lock manual fitting from the Classic series by Kärcher. Also suitable for hot water high-pressure cleaners.	☐
High-pressure hose Classic, 10 m, ID 8, 315 bar × , EASY!Lock	151	4.119-005.0		☐
Hose TR DN8 31,5MPa 20m with package, 20 m, ID 8, 315 bar × , EASY!Lock	152	4.119-006.0		☐
Hose TR DN8 31,5MPa 30m with package, 30 m, ID 8, 315 bar × , EASY!Lock	153	4.119-007.0		☐
Hose assembly with package TR DN8 max31,, 15 m, ID 8, 315 bar × , EASY!Lock	154	4.119-017.0		☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H

1.524-967.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Classic				
Hose M DN8 31,5MPa 20m with package, 20 m, ID 8, 315 bar × , M22 × 1.5	155	4.760-857.0	High-pressure hose with M22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
PIPE CLEANING				
Pipe cleaning hose, ID 6				
Pipe cleaning hose, ID 6, 10 m, max. 250 bar	156	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, ID 6, 20 m, max. 250 bar	157	6.110-008.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, ID 6, 30 m, max. 250 bar	158	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 20 m, max. 250 bar	159	6.390-030.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning nozzle				
Pipe cleaning dirt blaster D21/060	160	4.765-002.0	The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	☐
Pipe cleaning dirt blaster D30/060	161	4.765-005.0		☐
Pipe cleaning nozzle	162	5.763-015.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for cleaning blocked drains and pipes.	☐
	163	5.763-016.0		☐
Rotating pipe cleaning nozzle	164	6.415-428.0	Pipe cleaning nozzle with four rotating jets and inner thread. Different spray directions. The hose moves freely through the pipe. With R 1/8" connection.	☐
	165	6.415-440.0	Rotating pipe cleaning nozzle with internal thread and four rotating jets for cleaning blocked drains and pipes.	☐
FLOOR AND HARD SURFACE CLEANER				
FR Classic surface cleaner				
Surface cleaner medium M with package	166	4.760-876.0	Designed for hot water applications up to max. 100 °C: Classic surface cleaner made of metal with HP trigger gun, 500 mm diameter, and nozzle kit (2 × nozzle size 025; others can be ordered separately).	☐
Hard Surface Cleaner FRV 30				
FRV 30 Surface Cleaner	167	2.111-010.0	Integrated automatic suction removes dirty water through the supplied 5 m suction hose, eliminating the need to rinse the surface after cleaning and allowing use in inside and outside areas. Features include non-marking steering rollers and double ceramic bearings. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1000 l/h / 60 °C.	☐
FRV 30 surface cleaner	168	2.642-999.0	Integrated automatic suction removes dirty water through the supplied 5 m suction hose, eliminating the need to rinse the surface after cleaning. Features include non-marking steering rollers and double ceramic bearings. Machine-specific nozzle kit must be ordered separately.	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
FLOOR AND HARD SURFACE CLEANER				
Hard Surface Cleaner FRV 30				
Extension hose 5 m	169	4.440-939.0	5m extension hose for FRV 30. Connection sleeve included.	☐
Hard surface cleaner FR 30				
FR 30 Surface Cleaner	170	2.111-011.0	Up to 10 times greater area performance compared with the conventional high-pressure jet. Plastic casing for optimal manoeuvrability, double ceramic bearing for long working times, flexible connection joint for optimal handling and integrated parking position. Machine-specific nozzle kit must be ordered separately. Max. 180 bar / 850 l/h / 60°C.	☐
Surface Cleaner FR 30	171	2.642-997.0	Up to 10 times greater area coverage compared with the conventional high pressure jet. Plastic casing for optimal manoeuvrability, double ceramic bearing for long working times, flexible connection joint for ergonomic handling and integrated parking position. Machine specific nozzle kit must be ordered separately.	☐
FR 30 Me surface cleaner				
Hard Surface Cleaner FR 30 Me	172	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	☐
Hard surface cleaner FR 30 Me	173	2.640-355.0		☐
Hard Surface Cleaner FR 50				
Surface Cleaner FR 50 Me	174	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	☐
Hard surface cleaner FR 50	175	2.640-679.0		☐
Machine-specific nozzle kits for FR				
Nozzle kit for FR, 850 l/h - 1100 l/h	176	2.640-442.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (850 to 1100 l/h).	☐
Machine-specific nozzle kits for FRV				
Nozzle kit for FRV, 050	177	2.642-433.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	☐
FRV 30 Me surface cleaner				
FRV 30 Me Surface Cleaner	178	2.111-012.0	The stainless steel FRV 30 Me Surface Cleaner is designed for hot water cleaning up to 85 °C in inside and outside areas. Integrated automatic suction removes dirty water directly during operation.	☐
FRV 30 Me	179	2.642-911.0		☐
Extension hose FRV 30 Me and FRV 50 Me	180	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	☐
Surface Cleaner FR 50 Me				
FRV 50 Me surface cleaner	181	2.111-024.0	Surface cleaning with automatic suction of the dirty water for very large surfaces - this means the FRV 50 Me. Hot water cleaning up to 85°C. The FRV 50 Me features a temperature-resistant 10 m polyurethane suction hose. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 2000 l/h / 85°C.	☐
FRV 50 ME	182	2.643-598.0	The stainless steel FRV 50 Me surface cleaner is designed for hot water cleaning up to 85 °C in inside and outside areas. Integrated automatic suction removes waste water directly during operation. The FRV 50 Me features a temperature-resistant 7.5 m polyurethane suction hose, non-marking steering rollers, and a double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1,300 l/h / 85 °C.	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Advanced 3, 900 l/h – 2500 l/h	183	4.112-065.0	Specially designed for use with aggressive cleaning agents: High-quality cup foam lance Advanced 3 with spray angle adjustment and Eco brass for high-pressure cleaners from Kärcher.	☐
Two-litre cleaning agent container for DUO Advanced foam lance	184	4.112-066.0	The additional two-litre container enables detergent to be changed quickly with the Kärcher Basic, Advanced and DUO Advanced cup foam lance.	☐
Cup foam lance DUO Advanced 3, 900 l/h – 2500 l/h	185	4.112-069.0	DUO Advanced 3 cup foam lance, designed for use with aggressive detergents. With instant switching to high-pressure cleaning, spraying angle adjustment and two-litre tank.	☐
Cup foam lance Basic 3, 900 l/h – 2500 l/h	186	4.112-055.0	Basic 3 cup foam lance for high-pressure cleaners with a flow rate of 900-2500 l/h: Reduces cleaning agent consumption by 50% compared to cup foam lances without a dosing facility.	☐
Cup foam lance Advanced	187	6.394-968.0	Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	☐
1-litre cleaning agent container for cup foam lance basic	188	5.071-414.0	For the quick change of the cleaning agent: Additional 1 litre cleaning agent container for basic foam lance (2.112-053.0, 2.112-054.0 and 2.112-055.0).	☐
1-litre cleaning agent container for cup foam lance advanced	189	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	☐
Inno Foam Kit				
Inno Foam Set with detergent injector	190	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	☐
	191	2.640-151.0		☐
Inno Foam Set	192	2.640-692.0		☐
Easy Foam Set				
Easy Foam Set with RM injector	193	2.112-010.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	☐
	194	2.640-691.0		☐
Easy Foam Set	195	2.640-693.0		☐
Nozzle kits for Inno/Easy Foam Set				
Nozzle kit 090 for Inno / Easy Set 700-1,000 l/h	196	2.111-019.0	Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
FOAM SYSTEMS				
Nozzle kits for Inno/Easy Foam Set				
Nozzle kit 110 for Inno / Easy Set 1,000-1,300 l/h	197	2.111-020.0	Nozzle kit 110 contains Kärcher power nozzles and nozzle inserts. For Inn/Easy-Foam set 1000-1300 l/h. For optimal foam system performance.	☐
Nozzle kit 090 for Inno / Easy Set 700-1,000 l/h	198	2.640-688.0	Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	☐
Nozzle kit 110 for Inno / Easy Set 1,000-1,300 l/h	199	2.640-689.0	Nozzle kit 110 contains Kärcher power nozzles and nozzle inserts. For Inn/Easy-Foam set 1000-1300 l/h. For optimal foam system performance.	☐
MIXERS AND INJECTORS				
Cleaning agent injector				
Cleaning agent injector for high and low pressure (without nozzles)	200	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	☐
	201	3.637-001.0		☐
Nozzle insert with order no. 4.637-032.0				
Nozzle insert up to 1,100 l/h - high pressure	202	4.769-003.0	Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	☐
Nozzle insert up to 1,100 l/h - low pressure	203	4.769-001.0	For low pressure with machines up to 1.100 l/h	☐
COUPLING PARTS				
Rotary coupling				
Rotary coupling	204	4.111-021.0	Reliably prevents twisting of HP hoses. Connection Easy!Lock. Handle protection	☐
	205	4.401-091.0	Reliably prevents twisting of HP hoses. Connection M 22 × 1.5 m. Handle protection	☐
Coupling				
Coupler - 2 × M22 × 1,5	206	4.403-002.0	For connecting and extending high-pressure hoses. Connection 2 × M 22 × 1.5.	☐
Connector				
Screw socket for surface cleaners and Servo Control controllers	207	4.111-022.0	For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) - 1 × M 22 × 1.5/1 × M 18 × 1.5.	☐
Y distributor	208	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐
Short spray unit	209	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	☐
Y distributor	210	4.405-048.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
COUPLING PARTS				
EASY!Lock adapter				
Adapter 1 M22AG-TR22AG	211	4.111-029.0	Adapter 1 to connect the old hose with the new hose	☐
Adapter 2 M22IG-TR22AG	212	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	☐
Adapter 3 M22IG-TR22AG	213	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	☐
Adapter 4 TR22IG-D11	214	4.111-032.0	Adapter 4 to connect the new gun with the old swivel hose	☐
Adapter 5 TR22IG-M22AG	215	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	☐
Adapter 6 TR22IG-M22AG	216	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	☐
Adapter 7 M18IG-TR20AG	217	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	☐
Adapter 8 TR20IG-M18AG	218	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	☐
Adapter hose extension 9 TR	219	4.111-037.0	Adapter 9 to connect the new hose with the new hose	☐
Adapter 12 rotary coupling EASY!Lock 22 IG - M22 x 1.8 AG	220	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	☐
HOSE REELS				
Automatic, self-winding hose reels for wall mounting				
Automatic hose reel, powder-coated steel / plastic, 20 m	221	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	☐
Automatic stainless steel / synthetic material hose drum, 20 m	222	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	☐
Automatic hose reel, coated, 20 m	223	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	☐
Hose reel, automatic, basalt grey-coated, 20 m	224	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. For example: order no. 6.110-011.0 (ID 8, 20 m, 315 bar) or order no. 6.110-028.0 (ID 8, 20 m, 400 bar Longlife).	☐

☐ Available accessories.


ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
HOSE REELS				
Automatic, self-winding hose reels for wall mounting				
Automatic hose reel, stainless steel, includes swivel holder, 20 m	225	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	☐
Automatic stainless steel hose reel, 40 m	226	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	☐
WATER CONNECTION				
Geka coupling				
Geka connector with hose barb, R 1/2"	227	6.388-461.0	with hose liner	☐
Geka connector with hose barb, R 3/4"	228	6.388-455.0		☐
Geka connector with hose barb, R 1"	229	6.388-465.0	with hose barb	☐
Geka connector with inner thread, R 3/4"	230	6.388-473.0	with female thread	☐
Geka connector with internal thread, R 1"	231	6.388-458.0		☐
STATIONARY HIGH-PRESSURE CLEANING SYSTEMS				
Add-on kit cleaning agents double	232	2.209-006.0	The attachment kit makes it easy to dose a second detergent by remote control.	☐
Add-on kit pressure discharge	233	2.209-007.0	Attachment kit for automatic pressure relief for stationary cold and hot water high-pressure cleaners. For effective protection of the high-pressure system.	☐
Attachment kit with hour counter and pressure gauge	234	2.209-008.0	Attachment kit with hour counter and pressure gauge for stationary cold and hot water high-pressure cleaners. For easy control of the machine's operating time and operating pressure.	☐
Steel wall bracket, complete	235	2.209-009.0	The wall bracket enables easy and safe installation of a stationary high-pressure cleaner (cold or hot water) on the wall.	☐
Water inlet solenoid valve attachment kit	236	2.209-010.0	Water inlet solenoid valve attachment kit for stationary cold and hot water high-pressure cleaners. The solenoid valve automatically closes the water supply to the high-pressure cleaner when the machine is at a standstill.	☐
Attachment kit stand, 200 mm	237	2.638-276.0	The attachment kit enables stationary high-pressure cleaners from Kärcher to be installed on the ground in a versatile and stable manner. The machine is securely positioned 200 mm from the floor.	☐
Double connecting	238	5.402-001.0		☐

☐ Available accessories.


ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0

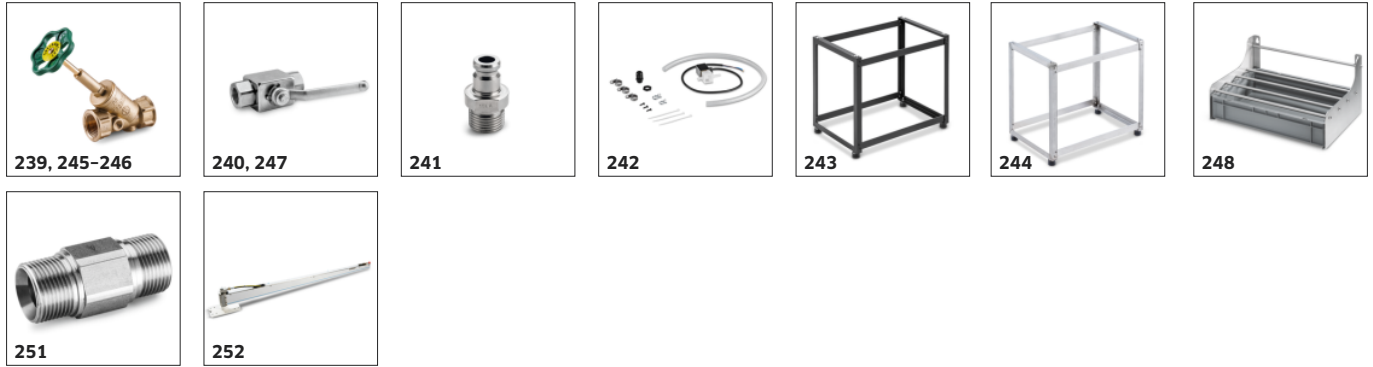

		Order no.	Description	
STATIONARY HIGH-PRESSURE CLEANING SYSTEMS				
Full-bore valve	239	6.412-021.0		☐
High-pressure ball valve	240	6.412-066.0		☐
Quick release coupling	241	6.463-022.0		☐
RM 1 dosing attachment kit via remote control	242	2.209-005.0	The attachment kit makes it easy to dose the detergent via remote control.	☐
Steel floor structure	243	2.210-001.0	Steel floor structure for the installation of stationary high pressure cold water machines. Dimensions W × H × D : 800 × 740 × 540 mm.	☐
Stainless steel floor structure	244	2.210-002.0	Stainless steel floor structure for the installation of stationary high pressure cold water machines. Dimensions W × H × D : 800 × 740 × 540 mm.	☐
STATIONARY HIGH-PRESSURE CLEANERS				
Full-bore valve	245	6.412-022.0		☐
	246	6.412-027.0		☐
High-pressure ball valve, stainless steel, G1/2"	247	6.413-500.0	High-pressure ball valve made of stainless steel. Nominal size DN 13, nominal pressure PN 400 for a temperature range up to 100 °C. Connection G1/2" internal thread.	☐
Wall bracket for 2 × cleaning agent cans, stainless steel	248	2.641-703.0	Wall bracket for two cans.	☐
High-pressure hose	249	4.440-172.0		☐
Spray lance, rotatable, grey	250	4.760-628.0	Spray lance, rotatable, grey, 2,050 mm.	☐
ULTRA-HIGH-PRESSURE CLEANERS				
Couplings and connectors				
Coupling	251	4.403-004.0	For joining and extending HD hoses. Connection 2 × M 22 × 1.5. Material: Stainless steel.	☐
SELF-SERVICE WASHING SYSTEMS AND EQUIPMENT				
Wash bay equipment				
360° swivelling boom for high-pressure hose	252	4.058-106.0	Swivelling boom for HP-working hose (360° turning circle). Mounted above the washing bay.	☐

☐ Available accessories.

ACCESSORIES FOR HD 10/19-4 ST H 1.524-967.0



		Order no.	Description	
SELF-SERVICE WASHING SYSTEMS AND EQUIPMENT				
Miscellaneous				
Swinging boom 180°, wall-mounted	253	2.637-120.0	Ideal for stationary HD/HDS machines from Kärcher, e.g. in washing bays: wall-mounted swivelling boom with 180° outreach for holding the high-pressure hose.	☐
STATIONARY HIGH-PRESSURE CLEANERS				
Hot water generators				
HWE 860	254	3.070-030.0	The electrical hot water generator is used in combination with a pressure washer and can heat water up to 85 °C.	☐
HWE 13/21-42kW	255	3.070-035.0	The Kärcher water heater is an electric hot water generator with a powerful 42 kW heating output that can be flexibly installed on the high-pressure side of a high-pressure cleaner.	☐
DRUM AND TANK CLEANING				
Barrel and tank cleaning				
Spray head HKF 30/14-E	256	6.751-061.0	Compact interior cleaning head made of stainless steel for cleaning the interiors of drums and containers with openings of 65 mm or more. Offers an impressively low weight and constant rotation speed by means of an electric motor.	☐

☐ Available accessories.