HD 8/18-4 ST H

Stationary cold water high-pressure cleaner with a robust frame and a stainless steel cover. Powerful with 800 l/h and 180 bar, high-quality equipment and high operational safety.

WORLD'S NO. 1 PRESSURE WASHER BRAND

Made in Germany

4-6 h

SERVO CONTROL

1 × 360°
EASY!Lock

Order no.	1.524-966.0

- Hard-wearing stainless steel housing and frame
- Easy installation, operation and maintenance of the machine

Technical data

EAN code		4066529057174
Number of current phases	Ph	3
Voltage	V	400
Frequency	Hz	50
Flow rate	l/h	500 – 800
Working pressure	bar / MPa	50 – 180 / 5 – 18
Max. pressure	bar / MPa	240 / 24
Inlet temperature	°C	85
Connected load	kW	5.5
Protection	A	16
Power cable	m	5
Water inlet		1"
Number of users		1
Portability		stationary
Weight (with accessories)	kg	75
Weight incl. packaging	kg	84.8
Dimensions (L × W × H)	mm	800 × 605 × 600

Scope of supply

- Servo Control
- Power nozzle
- Frame and cover: Stainless steel
- Prepared for Servo Control
- Pre-equipped for a detergent inlet

Equipment

- Crankshaft pump with ceramic pistons
- Advance pressure pump
- Calcification protection
- Dry-running protection
- Large water fine filter
- Storage tank with float valve
- Prepared for remote operation
- RM1 dosage
- Sight glass for oil level
- Oil dipstick
- Air-cooled motor

This machine requires instruction.

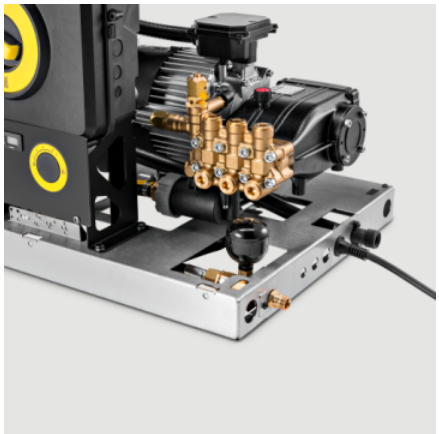

High-quality equipment

- Storage tank with valve, limescale protection and dry-running protection.
- Very robust stainless steel frame and cover.
- The machine can alternatively be controlled with a remote control.

Durable and robust

- Robust crankshaft pump with brass cylinder head and high-quality materials ensure a long service life.
- 15 kW Kärcher crankshaft pump
- Four-pole, low-speed air-cooled electric motor.

Easy to use

- Just one rotary switch for all functions guarantees simple operation without long training times.
- Particularly user-friendly thanks to self-explanatory symbols. No need for time-consuming induction.
- LEDs indicate readiness for use, water shortage and service interval.

HD 8/18-4 St H, 1.524-966.0, 2026-09-18

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

1, 3, 5, 7, 9–13, 15–18, 22–23, 25

2, 4, 6, 8, 19–21, 24, 26–27

14

		Order no.	Description	
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 25°				
Power nozzle 25°, 043	1	2.113-008.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	■
Power nozzle 25°, 045	2	2.883-398.0		☐
	3	2.113-022.0		☐
Power nozzle 25°, 050	4	2.883-399.0		☐
Power nozzle 25°, 047	5	2.113-009.0		☐
Power nozzle 25°, 052	6	2.883-400.0		☐
Power nozzle , 048	7	2.113-010.0	Fan jet nozzle for large-area coverage and stubborn dirt and stains.	☐
Power nozzle , 055	8	2.883-401.0	Fan jet nozzle for large area coverage and stubborn dirt and stains.	☐
Power nozzle 25°, 052	9	2.113-024.0	Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	☐
Power nozzle , 054	10	2.113-011.0	Flat jet nozzle for large area performance and stubborn dirt.	☐
Power nozzle , 055	11	2.113-025.0		☐
HP nozzle spray angle 0°				
Power nozzle 0°, 045	12	2.113-033.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	☐
Power nozzle 0°, 050	13	2.113-034.0		☐
	14	2.884-535.0		☐

■ Included in the scope of supply. ☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

1, 3, 5, 7, 9–13, 15–18, 22–23, 25

2, 4, 6, 8, 19–21, 24, 26–27

28

		Order no.	Description	
KÄRCHER POWER NOZZLE				
HP nozzle spray angle 0°				
Power nozzle 0°, 055	15	2.113-035.0	High-pressure nozzle with powerful jet for extremely stubborn dirt.	☐
Power nozzle spray angle 15°				
Power nozzle 15°, 045	16	2.113-046.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	☐
Power nozzle 15°, 055	17	2.113-047.0		☐
Power nozzle 15°, 060	18	2.113-048.0	Fan jet nozzle for stubborn dirt and stains.	☐
Power nozzle 15°, 045	19	2.883-389.0	Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	☐
Power nozzle 15°, 055	20	2.883-390.0		☐
Power nozzle 15°, 060	21	2.883-391.0	Fan jet nozzle for stubborn dirt and stains.	☐
Power nozzle spray angle 40°				
Power nozzle 40°, 045	22	2.113-053.0	Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	☐
Power nozzle 40°, 050	23	2.113-054.0		☐
Power nozzle 40°, 045	24	2.884-523.0		☐
Power nozzle 40°, 055	25	2.113-055.0		☐
Power nozzle 40°, 050	26	2.884-524.0		☐
Power nozzle 40°, 055	27	2.884-525.0		☐
STATIONARY HIGH-PRESSURE CLEANERS				
Hot water generators				
HWE 13/21-42kW	28	3.070-035.0	The Kärcher water heater is an electric hot water generator with a powerful 42 kW heating output that can be flexibly installed on the high-pressure side of a high-pressure cleaner.	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

29

30

31

32–33

34, 278

35

36–37

38–39

40

41

42

		Order no.	Description	
STATIONARY HIGH-PRESSURE CLEANERS				
Hot water generators				
HWE 860	29	3.070-030.0	The electrical hot water generator is used in combination with a pressure washer and can heat water up to 85 °C.	☐
TRIGGER GUNS				
Spray guns				
Pistol TR 155°C with package	30	4.119-002.0	Classic spray gun with valve. Also suitable for Kärcher hot water high-pressure cleaners.	☐
M22 Classic spray gun	31	4.760-843.0		☐
EASY!Force Advanced	32	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	☐
EASY!Force Food	33	4.118-015.0	Perfect for the food industry: the EASY!Force high-pressure gun with full ceramic valve enables fatigueless working due to virtually zero holding force for the operator.	☐
High-End HD Trigger Gun	34	4.118-011.0	Trigger gun for professional use in the food industry and general industrial applications. Designed for water flow rates of up to 2500 l/h.	☐
High-end HP Food trigger gun	35	4.775-825.0	High-end spray gun with optimised flow. Low pressure losses, even with water flows of up to 2,500 l/h. Robustness and durability for professional use. Food-safe and saltwater-resistant materials offer the best prerequisites for use in the food industry and for commercial use. Connector for HD hoses M 22 × 1.5.	☐
Servo control				
Servo Control, 750 l/h – 1100 l/h	36	4.118-008.0	Water quantity and pressure regulated directly from the hand spray gun.	☐
Servo Control, food, 750 l/h – 1100 l/h	37	4.118-016.0	Water flow and pressure control on the trigger gun. Food-grade, parts in contact with water are stainless steel.	☐
Servo Control, 750 l/h – 1100 l/h	38	4.775-470.0	Water flow and pressure control on the trigger gun.	☐
Servo Control, stainless steel version, 750 l/h – 1100 l/h	39	4.775-800.0	Water volume and pressure regulation directly from the spray gun. Version for the food industry, water-carrying components made from stainless steel.	☐
SPRAY LANCES				
Rotating spray lances				
Jet pipe with transport packaging, 840 mm	40	4.119-003.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Spray lance Classic EASY!Lock, 1050 mm	41	4.119-008.0	High-pressure spray lance with EASY!Lock screw connections from the Classic series from Kärcher. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe TR 600mm with package, 600 mm	42	4.119-009.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

43

44

45

46

47

48

49

50

51

52


53

54

55

56

		Order no.	Description	
SPRAY LANCES				
Rotating spray lances				
Jet pipe Classic TR 100mm, 100 mm	43	4.119-013.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe Classic TR 200mm, 200 mm	44	4.119-014.0		☐
Jet pipe Classic TR 400mm, 400 mm	45	4.119-015.0		☐
LED nozzle light	46	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	☐
Spray lance, 250 mm, rotatable	47	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	☐
Spray lance, 400 mm, rotatable	48	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	☐
Spray lance, 600 mm, rotatable	49	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	50	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1050 mm, rotatable	51	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1550 mm, rotatable	52	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	53	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 600 mm, rotatable	54	4.760-664.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	55	4.760-663.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1050 mm, rotatable	56	4.760-660.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

59

60

61

62

63

64

65

66

67

68, 71–72

69

70

		Order no.	Description	
SPRAY LANCES				
Rotating spray lances				
Spray lance, 1550 mm, rotatable	57	4.760-661.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	58	4.760-662.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance				
Spray lance Classic 1,050 mm	59	4.760-855.0	High-pressure spray lance with M 22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Jet pipe 600mm with package	60	4.760-856.0		☐
Jet pipe Classic M 200mm	61	4.760-887.0		☐
Jet pipe Classic M 400mm	62	4.760-888.0		☐
Jet pipe Classic M 840mm	63	4.760-895.0		☐
250 mm lance, non-rotatable	64	4.760-667.0	250 mm stainless steel lance. With manual coupling. Non-rotatable.	☐
550 mm lance, non-rotatable	65	4.760-665.0	550 mm stainless steel lance. With manual coupling. Non-rotatable.	☐
Double lance				
Double lance, 960 mm	66	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	☐
	67	6.394-665.0		☐
Flexible spray lance				
Flexible lance, 1050 mm	68	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	☐
High pressure articulated joint	69	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	☐
	70	4.481-039.0	High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer.	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

68, 71–72

73

74

75

76

77–78

79

80

81

82

83–84

		Order no.	Description	
SPRAY LANCES				
Flexible spray lance				
Jet pipe flexible 0,85m, 850 mm	71	6.394-655.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	☐
Flexible lance, 1050 mm	72	6.394-654.0		☐
Undercarriage spray lance				
Underbody lance	73	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	☐
	74	4.760-245.0		☐
Additional handle				
Additional handle for EASY!Lock spray lances	75	4.321-380.0	Comfortable in every situation – the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task. Regularly changing your posture relieves the strain on your body, making work more relaxed. Thanks to the 360°-rotatable spray lance, the additional handle can simply be fully rotated whilst working for greater flexibility.	☐
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt Blaster, small				
Dirt blaster, small, 045	76	4.114-021.0	Up to 50% higher cleaning and area performance than its predecessor: with the new performance dirt blaster (nozzle size 045), power losses have been minimised and the spray quality maximised.	☐
Dirt blaster, 045	77	4.767-232.0		☐
Dirt blaster, 050	78	4.767-233.0	Full power against stubborn dirt: the new performance dirt blaster with nozzle size 050 achieves up to 50% higher cleaning and area performance than its predecessor.	☐
Dirt blaster, large				
Dirt blaster Vibrasoft, 050	79	4.114-066.0	Vibrasoft rotary nozzle with rotating pencil jet.	☐
Dirt blaster, large, 045	80	4.114-042.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	☐
Dirt blaster, 050	81	4.763-253.0		☐
Classic rotary nozzle				
Rotary nozzle M 050 with package	82	4.760-870.0	The powerful rotating point jet of the Classic rotary nozzle from Kärcher ensures the best possible cleaning results and is suitable for water temperatures of up to 60 °C.	☐
ECO!BOOSTER				
eco!Booster TR 045	83	2.113-087.0	eco!Booster with 50% more area performance than the Kärcher power nozzle; suitable for delicate surfaces. For cold and hot water high-pressure cleaners (nozzle size 045).	☐
eco!Booster TR 050	84	2.113-088.0	eco!Booster with 50% higher area performance than the Kärcher power nozzle; ideal for delicate surfaces. For cold and hot water high-pressure cleaners (nozzle size 050).	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

85–86

87

88

89

90

91


92

93

94

95

96

97–98

		Order no.	Description	
ECO!BOOSTER				
Eco!Booster MAX TR 045	85	2.113-096.0	eco!Booster MAX: 100 percent higher area performance compared to the Kärcher standard flat jet nozzle.	☐
Eco!Booster MAX TR 050	86	2.113-097.0		☐
QUICK CONNECT				
Quick coupling	87	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	☐
Male coupling	88	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread.	☐
Quick coupling	89	6.401-458.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	☐
Male coupling	90	6.401-459.0	Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 × 1.5 external thread.	☐
TAKE-OFF POINT EQUIPMENT				
Hose and spray lance holder VA	91	2.042-003.0	Hose and spray lance wall holder for practical and safe storage of high-pressure hoses or spray lances. Stainless steel wall holder.	☐
REMOTE CONTROL				
Emergency stop switch – for installation in remote control 2.744-015	92	6.635-434.0		☐
	93	6.651-485.0		☐
Remote release button	94	2.637-491.0	Remote release button for stationary high-pressure cleaners from Kärcher: resets the switch-off after 30 minutes of continuous operation or continuous pause.	☐
Remote control I/O, RM 1/2	95	2.744-014.0	Remote control for controlling a stationary cold water high-pressure cleaner. Functions: on/off and dosing of up to two detergents (RM1/RM2).	☐
Multi-key remote control, I/O, RM 1/2	96	2.744-015.0	Multi-key remote control for switching on and off and dosing up to two detergents (RM1/RM2). In conjunction with E-box 2.744-018.0.	☐
Add-on kit remote control 1 for HD-HDS-Stationary	97	2.744-017.0	Preparation for connecting rotary switch remote controls and emergency stop buttons to stationary cold and hot water high-pressure cleaners from Kärcher.	☐
Add-on kit remote control 2 for HD-HDS-Stationary	98	2.744-018.0	Preparation for connecting push-button remote controls and emergency stop buttons to stationary cold and hot water high-pressure cleaners from Kärcher.	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

99, 102–103


100–101

104

105, 115

106

107, 113, 119

108

109

110

111

112

		Order no.	Description	
CONTROL CABLE				
Control cable	99	6.647-222.0	Connection cable available as bulk stock (12 × 1.0 mm²) for use as control cable. For all stationary HD/HDS machines from Kärcher.	☐
Control cable 3 × 1.5 mm²	100	6.641-059.0	Connecting cable 3 × 1.5 mm². Available by the meter.	☐
Control cable 5 × 1.5 m	101	6.641-061.0	Control cable 5 × 1.5	☐
Control cable 7 × 1.5 m	102	6.641-064.0	Control cable 7 × 1.5	☐
Control cable 10 × 1.5 m	103	6.641-082.0	Control cable 10 × 1.5	☐
Conduit	104	2.420-008.0	Conduit for control cable installation. Consisting of 3 m conduit, 5x conduit clips, 5x dowels, 5x screws.	☐
HIGH-PRESSURE PIPEWORK				
High-pressure pipe kit	105	2.420-006.0	High-pressure pipe kit with 3 m stainless pipe Ø 16 × 2 mm, ID 12 and mounting accessories: compression fitting, 4 pipe clamps, 4 hanger bolts and 4 plastic dowels.	☐
Connection piece, pipe/HP hose, stainless steel (Ermeto)	106	2.638-181.0	Stainless steel	☐
Connection piece, pipe/stop cock, stainless steel (Ermeto)	107	2.638-183.0	For stationary HD/HDS machines: Stainless steel transition piece comprising double nipple, union nut and cutting ring. For connecting the pipe to the shut-off valve.	☐
Stop cock, stainless steel (Ermeto)	108	4.580-163.0	Stainless steel shut-off valve with M 22 × 1.5 thread suitable for connecting pipeline and high-pressure hose for stationary high-pressure systems from Kärcher.	☐
Union nut, stainless steel (Ermeto)	109	6.386-428.0	(VA)	☐
T-screw connection, stainless steel (Ermeto)	110	6.386-465.0	Stainless steel	☐
Stainless steel elbow union 90°	111	6.386-466.0	Stainless steel elbow union 90° with compression fitting (Ermeto) at both ends for 16 mm pipes.	☐
Quick coupling, loose part, M 22 × 1.5	112	6.463-023.0	loose part	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

107, 113, 119

114

105, 115

116

117

118

120

121

122

124

125

126

		Order no.	Description	
HIGH-PRESSURE PIPEWORK				
Connector, galvanised steel	113	2.638-180.0	Alternativ : stainless steel 2.638-181	☐
Shut-off valve, galvanised steel	114	4.580-144.0	Shut-off valve made from zinc-coated steel for stationary high-pressure systems from Kärcher. For connecting the pipeline to the high-pressure hose.	☐
Pipe kit, galvanised steel, 3 m	115	2.420-004.0	High-pressure pipe kit with 3 m galvanised steel pipe Ø 16 × 2.5 mm, DN 11 and fixing accessories: Compression fitting, 4 pipe clamps, 4 hanger bolts and 4 plastic dowels.	☐
Tee, galvanised steel	116	6.386-269.0	Tee (90°), galvanised steel with compression fitting for 16 mm pipes. Fixing material (Ermeto) included.	☐
Elbow union, galvanised steel	117	6.386-356.0	Elbow union, galvanised steel. With 90° angle piece with compression fitting (Ermeto) at both ends for 16 mm pipes.	☐
Pipe insulation, per running meter	118	6.286-147.0	For thermal insulation of pipes. Pipe cladding. Wall thickness 9 mm. PE foam with moisture barrier. Available per running meter.	☐
Adapter piece, galvanised steel	119	2.638-182.0	Alternative: stainless steel 2.638-183	☐
Quick-release coupling, fixed part	120	6.463-025.0	fixed part	☐
Union nut, galvanised steel	121	6.386-423.0	Union nut, galvanised steel. For 16 mm compression fitting.	☐
Cutting ring	122	6.386-357.0	Galvanised steel cutting ring. For 16 mm compression fitting.	☐
PLANT INSTALLATION				
Fine-mesh water filter	123	2.209-806.0	Fine-mesh water filter	☐
Emergency Stop switch	124	2.744-002.0	Emergency Stop switch with ISO housing for wall mounting. With 0.4 m power cord and fixing material.	☐
HOSE TRACK SYSTEM HIGH-PRESSURE CLEANERS				
C-rail holder	125	6.541-027.0	Wall-mounted C-rail holding clamp for hose guide of Kärcher high-pressure cleaners.	☐
C-rail, per running metre	126	6.233-017.0	C-rail profile as a guide track. 30x32 mm, 2 mm wall thickness 1.56 kg/m. Available per running metre.	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

127

128

129

130

131

132

134

136

137–138

139–140

		Order no.	Description	
HOSE TRACK SYSTEM HIGH-PRESSURE CLEANERS				
Rail connector	127	6.541-011.0	Rail connector	☐
End stop	128	6.541-025.0	End stop	☐
Cable trolley	129	6.541-026.0	Cable trolley for C-rail profile. 20 kg capacity. Weight 0.11 kg. Galvanised steel ball bearing.	☐
End bracket	130	6.541-028.0	End bracket	☐
Handle	131	6.541-029.0	C-rail profile clamp. Galvanised steel. Plastic clamping parts. Weight 0.06 kg.	☐
Wall bracket	132	6.541-039.0	Wall holder for galvanised steel C-rail profile.	☐
Rail holder wall	133	6.541-012.0	Galvanised steel rail bracket for C-rail profile. Weight 0.235 kg.	☐
Spray lance runner, movable	134	4.042-610.0	moveable	☐
SEALS FOR TRAPEZOIDAL THREAD				
Gasket set with 9x O-rings for TR thread	135	2.880-001.0		☐
NOZZLE UNION / SPACER				
Nozzle union				
Nozzle screws	136	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	☐
Nozzle connector	137	5.401-210.0	For protecting and connecting Kärcher power nozzles to spray lances (M 18 × 1.5 IG).	☐
Nozzle union food industry	138	5.401-318.0	Made of special brass alloy for use in the food industry.	☐
HIGH-PRESSURE HOSES				
Standard				
High-pressure hose, 20 m, ID 8, 315 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	139	6.110-011.0	High-pressure hose with AVS hose reel connection and EASY!Lock hand screw connection.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	140	6.110-018.0		☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

141, 157–158, 160

142–144

145, 151

146

147

148

149, 153, 156

150, 152, 154–155

		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard				
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	141	6.110-019.0	High-pressure hose (DN 8) with EASY!Lock manual screw fitting on both sides. Suitable for pressures up to 315 bar. Length: 10 m.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	142	6.390-025.0	10 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	143	6.390-185.0	15 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	144	6.390-171.0	20 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
Standard with unions on both sides				
High-pressure hose, 10 m, ID 10, 220 bar, 2 × EASY!Lock	145	6.110-041.0	Impressive values and basic equipment: 10 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 × M22 × 1.5	146	6.391-342.0	To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 × 1.5.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 2 × M22 × 1.5	147	6.390-010.0	With screw connections on both sides, M 22 × 1.5 with bend protection.	☐
High-pressure hose, 10 m, ID 6, 300 bar, 2 × EASY!Lock	148	6.110-056.0	High-pressure hose (DN 6) equipped with ANTI!Twist and the new EASY!Lock manual screw fitting on both sides. For pressures up to 300 bar. 10 m long.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 2 × M22 × 1.5	149	6.390-031.0	Screw connections at both ends, M 22 × 1.5, with kink protection.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	150	6.110-031.0	High-pressure hose (DN 8) suitable up to 315 bar pressure. With innovative EASY!Lock manual screw fitting on both sides, ANTI!Twist and 10 m long.	☐
High-pressure hose, 15 m, ID 8, 315 bar	151	6.110-033.0	15 m high-pressure hose, DN 8, fitted with EASY!Lock manual screw connections at both ends.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 2 × EASY!Lock	152	6.110-030.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose, 15 m, ID 10, 220 bar, 2 × M22 × 1.5	153	6.390-023.0	Connectors at both ends, M 22 × 1.5, with kink protection.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 2 × EASY!Lock	154	6.110-032.0	High-pressure hose (DN 8) with a length of 20 m and EASY!Lock manual screw fitting on both sides. Approved for max. 315 bar pressure.	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

150, 152, 154–155

149, 153, 156

141, 157–158, 160

159

161

162

163

164

165

166

167

168, 170–171, 181

		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
High-pressure hose, 30 m, ID 8, 315 bar, 2 × EASY!Lock	155	6.110-014.0	Comfortable length (30 m) and innovative EASY!Lock manual screw fitting: High-pressure hose (DN 8) with ANTI!Twist for pressures up to 315 bar.	☐
High-pressure hose, 20 m, ID 10, 220 bar, 2 × EASY!Lock	156	6.110-043.0	20 m in length and the extremely time-saving and comfortable EASY!Lock manual screw fitting on both sides are some of the main features of this high-pressure hose (DN 10).	☐
High-pressure hose, 25 m, ID 10, 220 bar, 2 × EASY!Lock	157	6.110-044.0	Impressive values and basic equipment: 25 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.	☐
High-pressure hose, 40 m, ID 10, 220 bar, 2 × EASY!Lock	158	6.110-045.0	40 m long high-pressure hose with EASY!Lock system for the time-saving manual screw connection (both sides). Nominal size (DN) 10, working pressure up to 220 bar.	☐
High-pressure hose, 15 m, ID 12, 210 bar, 2 × EASY!Lock	159	6.110-059.0	Designed for working pressures up to 250 bar: High-pressure hose (DN 12) with a length of 15 m. Has the comfortable EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose, 40 m, ID 12, 210 bar, 2 × EASY!Lock	160	6.110-060.0	With EASY!Lock manual screw fitting and lots of room for manoeuvre thanks to 40 m in length: High-pressure hose (DN 12) with EASY!Lock manual screw fitting on both sides. Suitable for working pressures up to 250 bar.	☐
Longlife 400				
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	161	6.110-028.0	20 m high-pressure hose (ID 8), for up to 400 bar pressure. With AVS hose reel connection and double steel reinforcement. EASY!Lock hand screw connection at other end of the hose.	☐
High-pressure hose Longlife, 40 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	162	6.110-076.0	High-pressure hose with 2-compartment steel insert, AVS hose reel connection, as well as EASY!Lock manual screw connection.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	163	6.390-208.0	20 m high-pressure hose Longlife 400 (DN 8) with patented (rotating) AVS trigger gun connector and manual coupling. Two layer high-strength steel wire reinforced.	☐
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 1,5 m, ID 8, 400 bar, 2 × EASY!Lock	164	6.110-024.0	1.5 m high-pressure hose (DN 8) with EASY!Lock manual screw fitting on both sides. Designed for max. 400 bar pressure.	☐
High-pressure hose Longlife, 1,5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	165	6.110-069.0	1.5 m long high-pressure hose (DN 8) suitable for up to 400 bar pressure with double steel core. Connections: M 22 × 1.5, as well as the comfortable and quick EASY!Lock manual screw fitting.	☐
High-pressure hose Longlife, 1,5 m, ID 8, 400 bar, 2 × M22 × 1.5	166	6.390-178.0	1.5 m high-pressure hose (DN 8, M 22 × 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 × 1.5).	☐
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	167	6.110-038.0	10 m long high-pressure hose (DN 8) with double steel core, EASY!Lock manual screw fitting on both sides, and ANTI!Twist. Approved for max. 400 bar pressure.	☐
High-pressure hose Longlife, 30 m, ID 8, 400 bar, 2 × EASY!Lock	168	6.110-023.0	High-pressure hose with double steel core, ANTI!Twist and EASY!Lock manual screw fitting on both sides. Nominal size DN 8, 30 m long, approved for max. 400 bar pressure.	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

169

168, 170–171, 181

172

173

174

175

176–177

178

179

180

182

		Order no.	Description	
HIGH-PRESSURE HOSES				
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × M22 × 1.5	169	6.391-354.0	To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 × 1.5.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	170	6.110-027.0	High-pressure hose with ANTI!Twist, EASY!Lock manual screw fittings and double steel core. 20 m long, nominal size DN 8, EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose Longlife, 15 m, ID 8, 400 bar, 2 × EASY!Lock	171	6.110-029.0	The double steel core ensures a particularly long life of this 15 m long high-pressure hose (DN 8), which is approved for pressures up to 400 bar.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × M22 × 1.5	172	6.390-027.0	with rotary coupling, 2 × M 22 × 1.5	☐
Food industry version				
High-pressure hose food grade, 15 m, ID 6, 250 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	173	6.391-654.0	15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.	☐
Food industry version with unions on both sides				
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × EASY!Lock	174	6.110-051.0	High-pressure hose (ID 6), 10 m long, with grey, non-marking outer covering. Approved for use in the food industry. With EASY!Lock hand screw connection at both ends.	☐
High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × EASY!Lock	175	6.110-052.0	Suitable for use in food industry: 20 m long high-pressure hose (ID 8) with grey, non-marking outer covering, ANTI!Twist and EASY!Lock hand screw connections.	☐
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × M22 × 1.5	176	6.389-479.0	10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 × 1.5 with anti-kink sleeve.	☐
High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × M22 × 1.5	177	6.389-581.0	20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 × 1.5, with kink protection. NW 8/155°C/250 bar.	☐
Longlife food design				
High-pressure hose food grade, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	178	6.110-075.0		☐
Longlife food design with screw connections at both ends				
High-pressure hose food grade Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	179	6.110-053.0	With blue, non-marking and animal fat-resistant outer covering: High-pressure hose (ID 8), 10 m long, with ANTI!Twist and EASY!Lock hand screw connection at both ends.	☐
High-pressure hose food grade Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	180	6.110-054.0	High-pressure hose with double steel reinforcement and blue, non-marking and animal fat-resistant outer covering. 20 m long with EASY!Lock hand screw connections.	☐
Special hoses				
High-pressure hose Ex, 10 m, ID 8, 400 bar, 2 × EASY!Lock	181	6.110-064.0	Electrically conductive, 10 m long high-pressure hose for use in hazardous areas. 10 m long high-pressure hose with EASY!Lock hand screw connections at both ends.	☐
High-pressure hose curved, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	182	6.110-068.0	For connection to hose reels: high-pressure hose, with M 22 × 1.5 connection and curved EASY!Lock hand screw connection. 1.5 m long, suitable for up to 400 bar working pressure.	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

183

184

185

186–188

189–190

191–192

193–195

196

		Order no.	Description	
HIGH-PRESSURE HOSES				
Special hoses				
High-pressure hose curved, 1.5 m, ID 8, 400 bar, 2 × M22 × 1.5	183	6.388-886.0	Connection hose in longlife quality with 2x M22 × 1.5, with angled connection on one side.	☐
Ultra Guard				
High-pressure hose Ultra Guard, 20 m, ID 8, max. 315 bar	184	6.110-083.0	Ultra Guard high-pressure hose with smooth, abrasion-resistant coating. Hose line designed for demanding cleaning operations.	☐
Classic				
High-pressure hose Classic, 10 m, ID 8, 315 bar × , EASY!Lock	185	4.119-005.0	High pressure hose with convenient EASY!Lock manual fitting from the Classic series by Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Hose TR DN8 31,5MPa 20m with package, 20 m, ID 8, 315 bar × , EASY!Lock	186	4.119-006.0		☐
Hose TR DN8 31,5MPa 30m with package, 30 m, ID 8, 315 bar × , EASY!Lock	187	4.119-007.0		☐
Hose assembly with package TR DN8 max31,, 15 m, ID 8, 315 bar × , EASY!Lock	188	4.119-017.0		☐
Hose assembly with package TR DN10 25MPa, 20 m, ID 10, 250 bar × , EASY!Lock	189	4.119-019.0		☐
Hose assembly with package TR DN10 25MPa, 40 m, ID 10, 250 bar × , EASY!Lock	190	4.119-020.0		☐
Hose with transport packaging, 10 m, ID 8, 315 bar × , M22 × 1.5	191	4.760-834.0	High-pressure hose with M22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Hose M DN8 31,5MPa 20m with package, 20 m, ID 8, 315 bar × , M22 × 1.5	192	4.760-857.0		☐
PIPE CLEANING				
Pipe cleaning hose, ID 6				
Pipe cleaning hose, ID 6, 10 m, max. 250 bar	193	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, ID 6, 20 m, max. 250 bar	194	6.110-008.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, ID 6, 30 m, max. 250 bar	195	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 20 m, max. 250 bar	196	6.390-030.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

197

198

199

200–201

202

203–204

205

206

207

208, 220

209

210

		Order no.	Description	
PIPE CLEANING				
Pipe cleaning hose, ID 6				
Pipe cleaning hose, ID 6, 10 m, max. 140 bar	197	6.110-048.0	10 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
Pipe cleaning nozzle				
Pipe cleaning dirt blaster D21/040	198	4.765-001.0	The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	☐
Pipe cleaning dirt blaster D30/040	199	4.765-004.0		☐
Pipe cleaning nozzle	200	5.763-015.0	16 mm pipe cleaning nozzle with internal thread. Various jet directions for cleaning blocked drains and pipes.	☐
	201	5.763-016.0		☐
	202	5.763-017.0	Pipe cleaning nozzle with inner thread. Different spray directions. The hose moves freely through the pipe. (R 1/8" connection, 3 × 30° backwards, diameter 30 mm.)	☐
Rotating pipe cleaning nozzle	203	6.415-428.0	Pipe cleaning nozzle with four rotating jets and inner thread. Different spray directions. The hose moves freely through the pipe. With R 1/8" connection.	☐
	204	6.415-440.0	Rotating pipe cleaning nozzle with internal thread and four rotating jets for cleaning blocked drains and pipes.	☐
FLOOR AND HARD SURFACE CLEANER				
FR Classic surface cleaner				
Surface cleaner medium M with package	205	4.760-876.0	Designed for hot water applications up to max. 100 °C: Classic surface cleaner made of metal with HP trigger gun, 500 mm diameter, and nozzle kit (2 × nozzle size 025; others can be ordered separately).	☐
Hard Surface Cleaner FRV 30				
FRV 30 Surface Cleaner	206	2.111-010.0	Integrated automatic suction removes dirty water through the supplied 5 m suction hose, eliminating the need to rinse the surface after cleaning and allowing use in inside and outside areas. Features include non-marking steering rollers and double ceramic bearings. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1000 l/h / 60 °C.	☐
FRV 30 surface cleaner	207	2.642-999.0	Integrated automatic suction removes dirty water through the supplied 5 m suction hose, eliminating the need to rinse the surface after cleaning. Features include non-marking steering rollers and double ceramic bearings. Machine-specific nozzle kit must be ordered separately.	☐
Extension hose 5 m	208	4.440-939.0	5m extension hose for FRV 30. Connection sleeve included.	☐
Hard surface cleaner FR 30				
FR 30 Surface Cleaner	209	2.111-011.0	Up to 10 times greater area performance compared with the conventional high-pressure jet. Plastic casing for optimal manoeuvrability, double ceramic bearing for long working times, flexible connection joint for optimal handling and integrated parking position. Machine-specific nozzle kit must be ordered separately. Max. 180 bar / 850 l/h / 60°C.	☐
Surface Cleaner FR 30	210	2.642-997.0	Up to 10 times greater area coverage compared with the conventional high pressure jet. Plastic casing for optimal manoeuvrability, double ceramic bearing for long working times, flexible connection joint for ergonomic handling and integrated parking position. Machine specific nozzle kit must be ordered separately.	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

211

212

213

214


215

216–217

218

219

208, 220

221

222

223

224

		Order no.	Description	
FLOOR AND HARD SURFACE CLEANER				
FR 30 Me surface cleaner				
Hard Surface Cleaner FR 30 Me	211	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	☐
Hard surface cleaner FR 30 Me	212	2.640-355.0		☐
Hard Surface Cleaner FR 50				
Surface Cleaner FR 50 Me	213	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas.With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	☐
Hard surface cleaner FR 50	214	2.640-679.0		☐
Machine-specific nozzle kits for FR				
Nozzle kit for FR, 650 l/h – 850 l/h	215	2.639-187.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (650 to 850 l/h).	☐
Machine-specific nozzle kits for FRV				
Nozzle kit for FRV, 045	216	2.642-432.0	Machine-specific nozzle kit with Kärcher power nozzles and jet nozzle for FRV 30.	☐
Nozzle kit for FRV, 050	217	2.642-433.0		☐
FRV 30 Me surface cleaner				
FRV 30 Me Surface Cleaner	218	2.111-012.0	The stainless steel FRV 30 Me Surface Cleaner is designed for hot water cleaning up to 85 °C in inside and outside areas. Integrated automatic suction removes dirty water directly during operation.	☐
FRV 30 Me	219	2.642-911.0		☐
Extension hose FRV 30 Me and FRV 50 Me	220	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	☐
Surface Cleaner FR 50 Me				
FRV 50 Me surface cleaner	221	2.111-024.0	Surface cleaning with automatic suction of the dirty water for very large surfaces – this means the FRV 50 Me. Hot water cleaning up to 85°C. The FRV 50 Me features a temperature-resistant 10 m polyurethane suction hose. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 2000 l/h / 85°C.	☐
FRV 50 ME	222	2.643-598.0	The stainless steel FRV 50 Me surface cleaner is designed for hot water cleaning up to 85 °C in inside and outside areas. Integrated automatic suction removes waste water directly during operation. The FRV 50 Me features a temperature-resistant 7.5 m polyurethane suction hose, non-marking steering rollers, and a double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1,300 l/h / 85 °C.	☐
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Advanced 2, 700 l/h – 800 l/h	223	4.112-064.0	Developed for Kärcher high-pressure cleaners without servo control: The cup foam lance Advanced 2 impresses with a main body made of Ecobrass for use with aggressive cleaning agents.	☐
Two-litre cleaning agent container for DUO Advanced foam lance	224	4.112-066.0	The additional two-litre container enables detergent to be changed quickly with the Kärcher Basic, Advanced and DUO Advanced cup foam lance.	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

225

226

227

228

229

230

231

232

233

234

235

236

237

238

		Order no.	Description	
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance DUO Advanced 2, 700 l/h – 800 l/h	225	4.112-068.0	For pressure washers without Servo Control: The DUO Advanced 2 cup foam lance is impressive with its option for direct switching to high-pressure cleaning and two-litre detergent tank.	☐
Cup foam lance Basic 2, 700 l/h – 800 l/h	226	4.112-054.0	Basic 2 cup foam lance for high-pressure cleaners with a flow rate of 700–800 l/h: Reduces cleaning agent consumption by 50% compared to cup foam lances without a dosing facility.	☐
Cup foam lance Advanced	227	6.394-969.0	Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	☐
1-litre cleaning agent container for cup foam lance basic	228	5.071-414.0	For the quick change of the cleaning agent: Additional 1 litre cleaning agent container for basic foam lance (2.112-053.0, 2.112-054.0 and 2.112-055.0).	☐
Cup foam lance, 1200 l/h –	229	6.394-668.0	Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	☐
1-litre cleaning agent container for cup foam lance advanced	230	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	☐
Inno Foam Kit				
Inno Foam Set with detergent injector	231	2.112-000.0	High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	☐
Inno Foam Set	232	2.112-008.0		☐
Inno Foam Set with detergent injector	233	2.640-151.0		☐
Inno Foam Set	234	2.640-692.0		☐
Easy Foam Set				
Easy Foam Set with RM injector	235	2.112-010.0	HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	☐
	236	2.640-691.0		☐
Easy Foam Set	237	2.640-693.0		☐
Nozzle kits for Inno/Easy Foam Set				
Nozzle kit 090 for Inno / Easy Set 700–1,000 l/h	238	2.111-019.0	Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

239

240–241

242–243

244

245

246

247

248, 250

249

251

252

		Order no.	Description	
FOAM SYSTEMS				
Nozzle kits for Inno/Easy Foam Set				
Nozzle kit 090 for Inno / Easy Set 700–1,000 l/h	239	2.640-688.0	Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	☐
MIXERS AND INJECTORS				
Cleaning agent injector				
Cleaning agent injector for high and low pressure (without nozzles)	240	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	☐
	241	3.637-001.0		☐
Nozzle insert with order no. 4.637-032.0				
Nozzle insert up to 1,100 l/h – high pressure	242	4.769-003.0	Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	☐
Nozzle insert up to 1,100 l/h – low pressure	243	4.769-001.0	For low pressure with machines up to 1.100 l/h	☐
COUPLING PARTS				
Rotary coupling				
Rotary coupling	244	4.111-021.0	Reliably prevents twisting of HP hoses. Connection Easy!Lock. Handle protection	☐
	245	4.401-091.0	Reliably prevents twisting of HP hoses. Connection M 22 × 1.5 m. Handle protection	☐
Coupling				
Coupler -2 × M22 × 1,5	246	4.403-002.0	For connecting and extending high-pressure hoses. Connection 2 × M 22 × 1.5.	☐
Connector				
Screw socket for surface cleaners and Servo Control controllers	247	4.111-022.0	For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) – 1 × M 22 × 1.5/1 × M 18 × 1.5.	☐
Y distributor	248	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐
Short spray unit	249	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	☐
Y distributor	250	4.405-048.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐
EASY!Lock adapter				
Adapter 1 M22AG-TR22AG	251	4.111-029.0	Adapter 1 to connect the old hose with the new hose	☐
Adapter 2 M22IG-TR22AG	252	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	☐

☐ Available accessories.

ACCESSORIES FOR HD 8/18-4 ST H
1.524-966.0

253

254

255

256

257

258

259

260

261

262

263

264

266

		Order no.	Description	
COUPLING PARTS				
EASY!Lock adapter				
Adapter 3 M22IG-TR22AG	253	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	☐
Adapter 4 TR22IG-D11	254	4.111-032.0	Adapter 4 to connect the new gun with the old swivel hose	☐
Adapter 5 TR22IG-M22AG	255	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	☐
Adapter 6 TR22IG-M22AG	256	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	☐
Adapter 7 M18IG-TR20AG	257	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	☐
Adapter 8 TR20IG-M18AG	258	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	☐
Adapter hose extension 9 TR	259	4.111-037.0	Adapter 9 to connect the new hose with the new hose	☐
Adapter 12 rotary coupling EASY!Lock 22 IG – M22 × 1.8 AG	260	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	☐
HOSE REELS				
Automatic, self-winding hose reels for wall mounting				
Automatic hose reel, powder-coated steel / plastic, 20 m	261	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	☐
Automatic stainless steel / synthetic material hose drum, 20 m	262	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	☐
Automatic hose reel, coated, 20 m	263	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	☐
Hose reel, automatic, basalt grey-coated, 20 m	264	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. For example: order no. 6.110-011.0 (ID 8, 20 m, 315 bar) or order no. 6.110-028.0 (ID 8, 20 m, 400 bar Longlife).	☐
Automatic hose reel, stainless steel, includes swivel holder, 20 m	265	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	☐
Automatic stainless steel hose reel, 40 m	266	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	☐

☐ Available accessories.