

HD 17/12-4 ST H

This robust, stationary high-pressure cleaner combines high performance (1,700 l/h) with simple operation and maintenance, as well as comprehensive equipment. Ideal for agriculture and industry.



Order no. 1.524-969.0

- 4-pole air-cooled motor and robust crankshaft pump with ceramic piston
- Easy installation, operation and maintenance of the machine

Technical data

EAN code		4066529057204
Number of current phases	Ph	3
Voltage	V	400
Frequency	Hz	50
Flow rate	l/h	900 - 1700
Working pressure	bar / MPa	50 - 120 / 5 - 12
Max. pressure	bar / MPa	180 / 18
Inlet temperature	°C	85
Connected load	kW	7
Protection	A	16
Power cable	m	5
Water inlet		1"
Number of users		2
Portability		stationary
Weight (with accessories)	kg	91
Weight incl. packaging	kg	100.8
Dimensions (L × W × H)	mm	800 × 605 × 600

Scope of supply

Servo Control
Power nozzle
Frame and cover: Stainless steel
Prepared for Servo Control
Pre-equipped for a detergent inlet

Equipment


Crankshaft pump with ceramic pistons
Advance pressure pump
Calcification protection
Dry-running protection
Large water fine filter
Storage tank with float valve
Prepared for remote operation
RM1 dosage
Sight glass for oil level
Oil dipstick
Air-cooled motor

This machine requires instruction.



High-quality equipment

- Storage tank with valve, limescale protection and dry-running protection.
- Very robust stainless steel frame and cover.
- Advance pressure pump for inlet temperatures of up to 85°C.

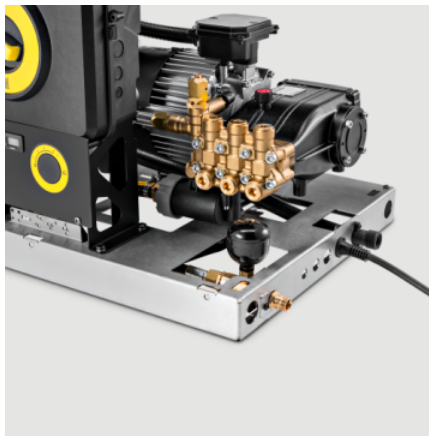

Durable and robust

- Robust crankshaft pump with brass cylinder head and high-quality materials ensure a long service life.
- 4-pole, slow-running electric motor guarantees a long working time.
- Prevention of limescale.



Electronic monitoring for greater operational safety.

- Switch off in the event of water shortage, LEDs: standby, service, error.
- Switches off in case of leaks or phase failure.
- Automatic switch-off in case of low voltage range or overvoltage.

ACCESSORIES FOR HD 17/12-4 ST H

1.524-969.0




		Order no.	Description	
KÄRCHER POWER NOZZLE				
Power nozzle spray angle 25°				
Power nozzle , 125	1	2.113-029.0	Flat jet nozzle for large area performance and stubborn dirt.	■
TRIGGER GUNS				
Spray guns				
Pistol TR 155°C with package	2	4.119-002.0	Classic spray gun with valve. Also suitable for Kärcher hot water high-pressure cleaners.	☐
EASY!Force Advanced	3	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	☐
EASY!Force Food	4	4.118-015.0	Perfect for the food industry: the EASY!Force high-pressure gun with full ceramic valve enables fatigueless working due to virtually zero holding force for the operator.	☐
High-End HD Trigger Gun	5	4.118-011.0	Trigger gun for professional use in the food industry and general industrial applications. Designed for water flow rates of up to 2500 l/h.	☐
Servo control				
Servo Control, 1100 l/h -	6	4.118-009.0	Water quantity and pressure regulated directly from the hand spray gun.	☐
	7	4.775-471.0		☐
SPRAY LANCES				
Rotating spray lances				
Jet pipe with transport packaging, 840 mm	8	4.119-003.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Spray lance Classic EASY!Lock, 1050 mm	9	4.119-008.0	High-pressure spray lance with EASY!Lock screw connections from the Classic series from Kärcher. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe TR 600mm with package, 600 mm	10	4.119-009.0	Rotating Classic spray lance with handle bowls in a stainless steel design. Also suitable for Kärcher hot water high-pressure cleaners.	☐
Jet pipe Classic TR 100mm, 100 mm	11	4.119-013.0		☐
Jet pipe Classic TR 200mm, 200 mm	12	4.119-014.0		☐
Jet pipe Classic TR 400mm, 400 mm	13	4.119-015.0		☐
LED nozzle light	14	2.680-002.0	Bright, lightweight LED work light for direct mounting on spray lance of EASY!Force high-pressure gun. Better view in unfavourable lighting conditions for up to 5 working hours.	☐

■ Included in the scope of supply. ☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H

1.524-969.0

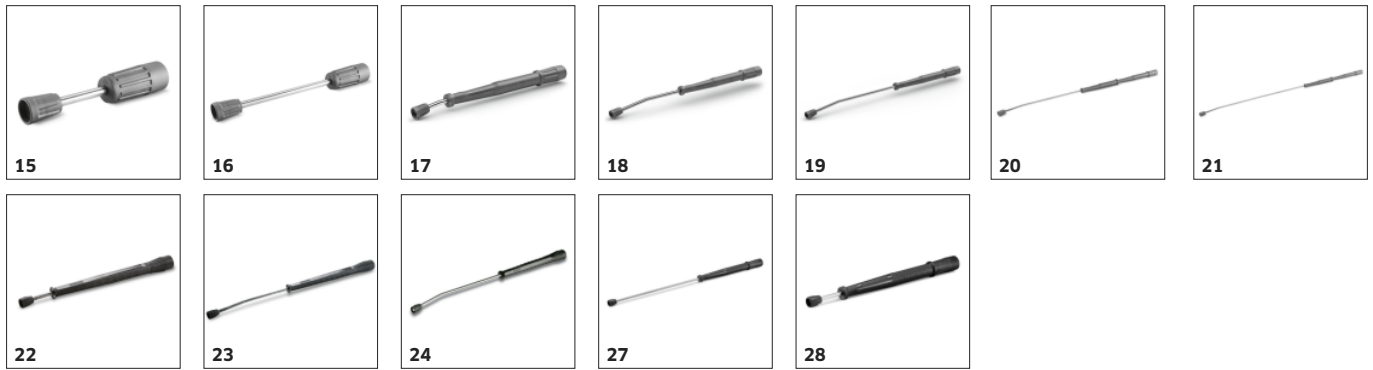

		Order no.	Description	
SPRAY LANCES				
Rotating spray lances				
Spray lance, 250 mm, rotatable	15	4.112-027.0	Spray lance, 250 mm, rotatable, ergonomic	☐
Spray lance, 400 mm, rotatable	16	4.112-024.0	Spray lance, 400 mm, rotatable, ergonomic	☐
Spray lance, 600 mm, rotatable	17	4.112-007.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	18	4.112-006.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1050 mm, rotatable	19	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1550 mm, rotatable	20	4.112-018.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	21	4.112-021.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 600 mm, rotatable	22	4.760-664.0	600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 840 mm, rotatable	23	4.760-663.0	850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1050 mm, rotatable	24	4.760-660.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 1550 mm, rotatable	25	4.760-661.0	1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance, 2050 mm, rotatable	26	4.760-662.0	2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	☐
Spray lance				
Spray lance Classic 1,050 mm	27	4.760-855.0	High-pressure spray lance with M 22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Jet pipe 600mm with package	28	4.760-856.0		☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H 1.524-969.0



		Order no.	Description	
SPRAY LANCES				
Spray lance				
Jet pipe Classic M 200mm	29	4.760-887.0	High-pressure spray lance with M 22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
Jet pipe Classic M 400mm	30	4.760-888.0		☐
Jet pipe Classic M 840mm	31	4.760-895.0		☐
250 mm lance, non-rotatable	32	4.760-667.0	250 mm stainless steel lance. With manual coupling. Non-rotatable.	☐
550 mm lance, non-rotatable	33	4.760-665.0	550 mm stainless steel lance. With manual coupling. Non-rotatable.	☐
Double lance				
Double lance, 960 mm	34	2.112-016.0	960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	☐
	35	6.394-665.0		☐
Flexible spray lance				
Flexible lance, 1050 mm	36	4.112-035.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	☐
High pressure articulated joint	37	4.112-057.0	For hard-to-reach areas: High-pressure articulated joint with infinite angle adjustment up to 120°. Simply attach directly to the spray lance of the pressure washer.	☐
	38	4.481-039.0	High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer.	☐
Jet pipe flexible 0,85m, 850 mm	39	6.394-655.0	1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	☐
Flexible lance, 1050 mm	40	6.394-654.0		☐
Undercarriage spray lance				
Underbody lance	41	4.112-032.0	Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	☐
	42	4.760-245.0		☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H


1.524-969.0




43



44, 46



45, 47-48



49



50-51



52-53



54, 69, 71, 73



55-57

		Order no.	Description	
SPRAY LANCES				
Additional handle				
Additional handle for EASY!Lock spray lances	43	4.321-380.0	Comfortable in every situation – the additional handle is easy to attach to the spray lance of our new EASY!Lock generation and makes work easier by allowing you to adjust your posture to suit the particular task. Regularly changing your posture relieves the strain on your body, making work more relaxed. Thanks to the 360°-rotatable spray lance, the additional handle can simply be fully rotated whilst working for greater flexibility.	☐
ROTARY NOZZLES (DIRT BLASTERS)				
Dirt blaster, large				
Dirt blaster, 100	44	4.764-208.0	Dirt blaster – rotating point jet – 10 times the cleaning performance. Maximum working time thanks to ceramic nozzle/bearing ring. Max. 300 bar / 30 MPa, 85 °C.	☐
Dirt blaster, large, 100	45	4.114-048.0	The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	☐
Dirt blaster, 120	46	4.763-930.0		☐
Dirt blaster, large, 120	47	4.114-044.0		☐
Dirt blaster, large, 130	48	4.114-049.0		☐
NOZZLE UNION / SPACER				
Nozzle union				
Nozzle screws	49	4.112-011.0	Nozzle screws with protectors for high-pressure and power nozzles	☐
Nozzle connector	50	5.401-210.0	For protecting and connecting Kärcher power nozzles to spray lances (M 18 × 1.5 IG).	☐
Nozzle union food industry	51	5.401-318.0	Made of special brass alloy for use in the food industry.	☐
HIGH-PRESSURE HOSES				
Standard				
High-pressure hose, 20 m, ID 8, 315 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	52	6.110-011.0	High-pressure hose with AVS hose reel connection and EASY!Lock hand screw connection.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	53	6.110-018.0		☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 × EASY!Lock	54	6.110-019.0	High-pressure hose (DN 8) with EASY!Lock manual screw fitting on both sides. Suitable for pressures up to 315 bar. Length: 10 m.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	55	6.390-025.0	10 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	56	6.390-185.0	15 m high-pressure hose (M 22 × 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H

1.524-969.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard				
High-pressure hose, 20 m, ID 8, 315 bar, 1 x M22 x 1.5 / 1 x AVS-hose reel connection	57	6.390-171.0	20 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	☐
Standard with unions on both sides				
High-pressure hose, 10 m, ID 10, 220 bar, 2 x EASY!Lock	58	6.110-041.0	Impressive values and basic equipment: 10 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 2 x M22 x 1.5	59	6.390-031.0	Screw connections at both ends, M 22 x 1.5, with kink protection.	☐
High-pressure hose, 10 m, ID 8, 315 bar, 2 x EASY!Lock	60	6.110-031.0	High-pressure hose (DN 8) suitable up to 315 bar pressure. With innovative EASY!Lock manual screw fitting on both sides, ANTI!Twist and 10 m long.	☐
High-pressure hose, 15 m, ID 8, 315 bar	61	6.110-033.0	15 m high-pressure hose, DN 8, fitted with EASY!Lock manual screw connections at both ends.	☐
High-pressure hose, 15 m, ID 8, 315 bar, 2 x EASY!Lock	62	6.110-030.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose, 15 m, ID 10, 220 bar, 2 x M22 x 1.5	63	6.390-023.0	Connectors at both ends, M 22 x 1.5, with kink protection.	☐
High-pressure hose, 20 m, ID 8, 315 bar, 2 x EASY!Lock	64	6.110-032.0	High-pressure hose (DN 8) with a length of 20 m and EASY!Lock manual screw fitting on both sides. Approved for max. 315 bar pressure.	☐
High-pressure hose, 20 m, ID 10, 220 bar, 2 x M22 x 1.5	65	6.390-726.0	with union on both sides, M 22 x 1.5 with anti-kink protection. NW 10/155°C/220 bar	☐
High-pressure hose, 30 m, ID 8, 315 bar, 2 x EASY!Lock	66	6.110-014.0	Comfortable length (30 m) and innovative EASY!Lock manual screw fitting: High-pressure hose (DN 8) with ANTI!Twist for pressures up to 315 bar.	☐
High-pressure hose, 15 m, ID 10, 220 bar, 2 x EASY!Lock	67	6.110-042.0	Equipped with innovative EASY!Lock manual screw fitting and suitable for pressures up to 220 bar: 15 m long high-pressure hose (DN 10).	☐
High-pressure hose, 20 m, ID 10, 220 bar, 2 x EASY!Lock	68	6.110-043.0	20 m in length and the extremely time-saving and comfortable EASY!Lock manual screw fitting on both sides are some of the main features of this high-pressure hose (DN 10).	☐
High-pressure hose, 25 m, ID 10, 220 bar, 2 x EASY!Lock	69	6.110-044.0	Impressive values and basic equipment: 25 m long high-pressure hose (DN 10) developed for pressures up to 220 bar.	☐
High-pressure hose, 40 m, ID 12, 210 bar, 2 x M22 x 1.5	70	6.391-865.0	High-pressure hose for water volumes greater than 1,800 l / h. With union on both sides. 2x M 22 x 1.5 with anti-kink protection.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H

1.524-969.0




		Order no.	Description	
HIGH-PRESSURE HOSES				
Standard with unions on both sides				
High-pressure hose, 40 m, ID 10, 220 bar, 2 × EASY!Lock	71	6.110-045.0	40 m long high-pressure hose with EASY!Lock system for the time-saving manual screw connection (both sides). Nominal size (DN) 10, working pressure up to 220 bar.	☐
High-pressure hose, 15 m, ID 12, 210 bar, 2 × EASY!Lock	72	6.110-059.0	Designed for working pressures up to 250 bar: High-pressure hose (DN 12) with a length of 15 m. Has the comfortable EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose, 40 m, ID 12, 210 bar, 2 × EASY!Lock	73	6.110-060.0	With EASY!Lock manual screw fitting and lots of room for manoeuvre thanks to 40 m in length: High-pressure hose (DN 12) with EASY!Lock manual screw fitting on both sides. Suitable for working pressures up to 250 bar.	☐
Longlife 400				
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	74	6.110-028.0	20 m high-pressure hose (ID 8), for up to 400 bar pressure. With AVS hose reel connection and double steel reinforcement. EASY!Lock hand screw connection at other end of the hose.	☐
High-pressure hose Longlife, 40 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	75	6.110-076.0	High-pressure hose with 2-compartment steel insert, AVS hose reel connection, as well as EASY!Lock manual screw connection.	☐
Longlife 400 with unions on both sides				
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × EASY!Lock	76	6.110-024.0	1.5 m high-pressure hose (DN 8) with EASY!Lock manual screw fitting on both sides. Designed for max. 400 bar pressure.	☐
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	77	6.110-069.0	1.5 m long high-pressure hose (DN 8) suitable for up to 400 bar pressure with double steel core. Connections: M 22 × 1.5, as well as the comfortable and quick EASY!Lock manual screw fitting.	☐
High-pressure hose Longlife, 1.5 m, ID 8, 400 bar, 2 × M22 × 1.5	78	6.390-178.0	1.5 m high-pressure hose (DN 8, M 22 × 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 × 1.5).	☐
High-pressure hose Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	79	6.110-038.0	10 m long high-pressure hose (DN 8) with double steel core, EASY!Lock manual screw fitting on both sides, and ANTI!Twist. Approved for max. 400 bar pressure.	☐
High-pressure hose Longlife, 30 m, ID 8, 400 bar, 2 × EASY!Lock	80	6.110-023.0	High-pressure hose with double steel core, ANTI!Twist and EASY!Lock manual screw fitting on both sides. Nominal size DN 8, 30 m long, approved for max. 400 bar pressure.	☐
High-pressure hose Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	81	6.110-027.0	High-pressure hose with ANTI!Twist, EASY!Lock manual screw fittings and double steel core. 20 m long, nominal size DN 8, EASY!Lock manual screw fitting on both sides.	☐
High-pressure hose Longlife, 15 m, ID 8, 400 bar, 2 × EASY!Lock	82	6.110-029.0	The double steel core ensures a particularly long life of this 15 m long high-pressure hose (DN 8), which is approved for pressures up to 400 bar.	☐
Food industry version				
High-pressure hose food grade, 15 m, ID 6, 250 bar, 1 × M22 × 1.5 / 1 × AVS-hose reel connection	83	6.391-654.0	15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.	☐
Food industry version with unions on both sides				
High-pressure hose food grade, 10 m, ID 8, 250 bar, 2 × EASY!Lock	84	6.110-051.0	High-pressure hose (ID 6), 10 m long, with grey, non-marking outer covering. Approved for use in the food industry. With EASY!Lock hand screw connection at both ends.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H

1.524-969.0

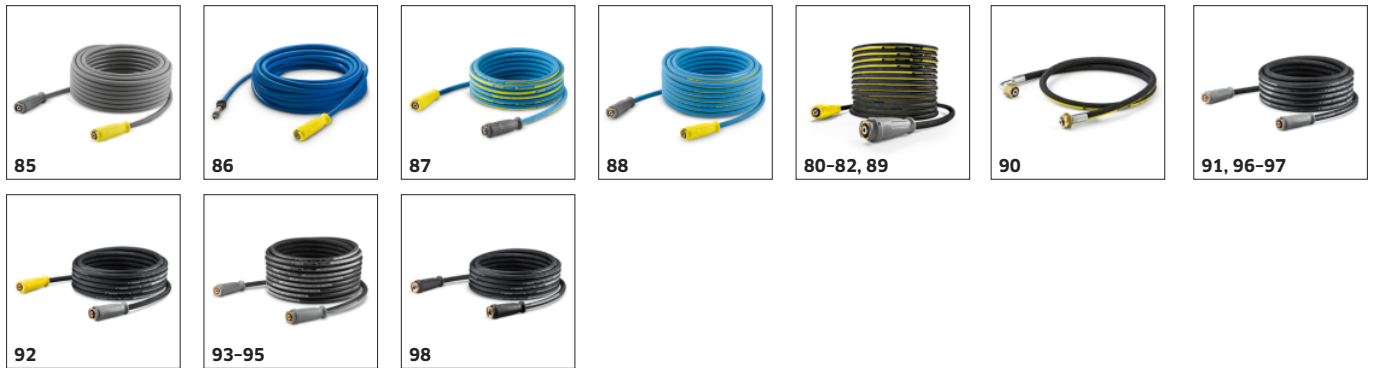

		Order no.	Description	
HIGH-PRESSURE HOSES				
Food industry version with unions on both sides				
High-pressure hose food grade, 20 m, ID 8, 250 bar, 2 × EASY!Lock	85	6.110-052.0	Suitable for use in food industry: 20 m long high-pressure hose (ID 8) with grey, non-marking outer covering, ANTI!Twist and EASY!Lock hand screw connections.	☐
Longlife food design				
High-pressure hose food grade, 20 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × AVS-hose reel connection	86	6.110-075.0		☐
Longlife food design with screw connections at both ends				
High-pressure hose food grade Longlife, 10 m, ID 8, 400 bar, 2 × EASY!Lock	87	6.110-053.0	With blue, non-marking and animal fat-resistant outer covering: High-pressure hose (ID 8), 10 m long, with ANTI!Twist and EASY!Lock hand screw connection at both ends.	☐
High-pressure hose food grade Longlife, 20 m, ID 8, 400 bar, 2 × EASY!Lock	88	6.110-054.0	High-pressure hose with double steel reinforcement and blue, non-marking and animal fat-resistant outer covering. 20 m long with EASY!Lock hand screw connections.	☐
Special hoses				
High-pressure hose Ex, 10 m, ID 8, 400 bar, 2 × EASY!Lock	89	6.110-064.0	Electrically conductive, 10 m long high-pressure hose for use in hazardous areas. 10 m long high-pressure hose with EASY!Lock hand screw connections at both ends.	☐
High-pressure hose curved, 1.5 m, ID 8, 400 bar, 1 × EASY!Lock / 1 × M22 × 1.5	90	6.110-068.0	For connection to hose reels: high-pressure hose, with M 22 × 1.5 connection and curved EASY!Lock hand screw connection. 1.5 m long, suitable for up to 400 bar working pressure.	☐
Classic				
High-pressure hose Classic, 10 m, ID 10, 250 bar ×, EASY!Lock	91	4.119-004.0	High pressure hose with convenient EASY!Lock manual fitting from the Classic series by Kärcher. Also suitable for hot water high-pressure cleaners.	☐
High-pressure hose Classic, 10 m, ID 8, 315 bar ×, EASY!Lock	92	4.119-005.0		☐
Hose TR DN8 31,5MPa 20m with package, 20 m, ID 8, 315 bar ×, EASY!Lock	93	4.119-006.0		☐
Hose TR DN8 31,5MPa 30m with package, 30 m, ID 8, 315 bar ×, EASY!Lock	94	4.119-007.0		☐
Hose assembly with package TR DN8 max31,, 15 m, ID 8, 315 bar ×, EASY!Lock	95	4.119-017.0		☐
Hose assembly with package TR DN10 25MPa, 20 m, ID 10, 250 bar ×, EASY!Lock	96	4.119-019.0		☐
Hose assembly with package TR DN10 25MPa, 40 m, ID 10, 250 bar ×, EASY!Lock	97	4.119-020.0		☐
Hose M DN8 31,5MPa 20m with package, 20 m, ID 8, 315 bar ×, M22 × 1.5	98	4.760-857.0	High-pressure hose with M22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H

1.524-969.0



		Order no.	Description	
HIGH-PRESSURE HOSES				
Classic				
Hose assembly with package M22 DN10 25MP, 20 m, ID 10, 250 bar × , M22 × 1.5	99	4.760-892.0	High-pressure hose with M22 screw connections from the Classic series from Kärcher. Also suitable for hot water high-pressure cleaners.	☐
PIPE CLEANING				
Pipe cleaning hose, ID 6				
Pipe cleaning hose, ID 6, 10 m, max. 250 bar	100	6.110-046.0	The 10 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 20 m, max. 120 bar	101	6.390-028.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 30 m, max. 120 bar	102	6.390-029.0	30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
Pipe cleaning hose, ID 6, 30 m, max. 250 bar	103	6.110-047.0	The 30 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, DN 6, 20 m, max. 250 bar	104	6.390-030.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning hose, ID 6, 10 m, max. 140 bar	105	6.110-048.0	10 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	☐
Pipe cleaning hose, ID 6, 20 m, max. 140 bar	106	6.110-049.0	The 20 m pipe cleaning hose is a highly flexible high pressure hose for pipe interior cleaning (threaded connection for nozzle R 1/8).	☐
Pipe cleaning nozzle				
Pipe cleaning dirt blaster D21/090	107	4.765-003.0	The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	☐
Pipe cleaning dirt blaster D30/090	108	4.765-010.0		☐
Pipe cleaning nozzle 120	109	5.763-089.0	Pipe cleaning nozzle with 24 mm diameter. With 8 nozzles tilted back at a 30° angle.	☐
FLOOR AND HARD SURFACE CLEANER				
FR Classic surface cleaner				
Surface cleaner medium M with package	110	4.760-876.0	Designed for hot water applications up to max. 100 °C: Classic surface cleaner made of metal with HP trigger gun, 500 mm diameter, and nozzle kit (2 × nozzle size 025; others can be ordered separately).	☐
Hard Surface Cleaner FR 50				
Hard surface cleaner FR 50	111	2.640-679.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	☐
Machine-specific nozzle kits for FRV				
Nozzle kit for FRV, 125	112	2.643-768.0	Machine-specific nozzle kit Kärcher power nozzles and jet nozzle for FRV 30 and FRV 50.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H

1.524-969.0



		Order no.	Description	
FLOOR AND HARD SURFACE CLEANER				
FRV 30 Me surface cleaner				
FRV 30 Me Surface Cleaner	113	2.111-012.0	The stainless steel FRV 30 Me Surface Cleaner is designed for hot water cleaning up to 85 °C in inside and outside areas. Integrated automatic suction removes dirty water directly during operation.	☐
FRV 30 Me	114	2.642-911.0		☐
Extension hose FRV 30 Me and FRV 50 Me	115	4.441-040.0	5 m extension hose for FRV 30 Me. Includes connecting adapter.	☐
Surface Cleaner FR 50 Me				
FRV 50 Me surface cleaner	116	2.111-024.0	Surface cleaning with automatic suction of the dirty water for very large surfaces - this means the FRV 50 Me. Hot water cleaning up to 85°C. The FRV 50 Me features a temperature-resistant 10 m polyurethane suction hose. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 2000 l/h / 85°C.	☐
FRV 50 ME	117	2.643-598.0	The stainless steel FRV 50 Me surface cleaner is designed for hot water cleaning up to 85 °C in inside and outside areas. Integrated automatic suction removes waste water directly during operation. The FRV 50 Me features a temperature-resistant 7.5 m polyurethane suction hose, non-marking steering rollers, and a double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1,300 l/h / 85 °C.	☐
FOAM SYSTEMS				
Cup foam lance				
Cup foam lance Advanced 3, 900 l/h - 2500 l/h	118	4.112-065.0	Specially designed for use with aggressive cleaning agents: High-quality cup foam lance Advanced 3 with spray angle adjustment and Ecobrass for high-pressure cleaners from Kärcher.	☐
Two-litre cleaning agent container for DUO Advanced foam lance	119	4.112-066.0	The additional two-litre container enables detergent to be changed quickly with the Kärcher Basic, Advanced and DUO Advanced cup foam lance.	☐
Cup foam lance DUO Advanced 3, 900 l/h - 2500 l/h	120	4.112-069.0	DUO Advanced 3 cup foam lance, designed for use with aggressive detergents. With instant switching to high-pressure cleaning, spraying angle adjustment and two-litre tank.	☐
Cup foam lance Basic 3, 900 l/h - 2500 l/h	121	4.112-055.0	Basic 3 cup foam lance for high-pressure cleaners with a flow rate of 900-2500 l/h: Reduces cleaning agent consumption by 50% compared to cup foam lances without a dosing facility.	☐
Cup foam lance Advanced	122	6.394-968.0	Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	☐
1-litre cleaning agent container for cup foam lance basic	123	5.071-414.0	For the quick change of the cleaning agent: Additional 1 litre cleaning agent container for basic foam lance (2.112-053.0, 2.112-054.0 and 2.112-055.0).	☐
1-litre cleaning agent container for cup foam lance advanced	124	6.414-050.0	Additional 1-litre cleaning agent container for quick replacement of the cleaning agent (for foam lance 2.112-017.0 and 2.112-018.0).	☐
MIXERS AND INJECTORS				
Cleaning agent injector				
Cleaning agent injector for high and low pressure (without nozzles)	125	4.637-032.0	Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	☐
	126	3.637-001.0		☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H

1.524-969.0



		Order no.	Description	
MIXERS AND INJECTORS				
Nozzle insert with order no. 4.637-032.0				
Nozzle insert from 1,100 l/h - HD	127	4.769-002.0	For high pressure with machines above 1.100 l/h	☐
Nozzle insert from 1,100 l/h - ND	128	4.769-006.0	For low pressure with machines above 1.100 l/h	☐
QUICK CONNECT				
Quick coupling	129	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	☐
Male coupling	130	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 × 1.5 external thread.	☐
Quick coupling	131	6.401-458.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 × 1.5 internal thread.	☐
Male coupling	132	6.401-459.0	Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 × 1.5 external thread.	☐
TAKE-OFF POINT EQUIPMENT				
Hose and spray lance holder VA	133	2.042-003.0	Hose and spray lance wall holder for practical and safe storage of high-pressure hoses or spray lances. Stainless steel wall holder.	☐
REMOTE CONTROL				
Add-on kit remote control 1 for HD-HDS-Stationary	134	2.744-017.0	Preparation for connecting rotary switch remote controls and emergency stop buttons to stationary cold and hot water high-pressure cleaners from Kärcher.	☐
Add-on kit remote control 2 for HD-HDS-Stationary	135	2.744-018.0	Preparation for connecting push-button remote controls and emergency stop buttons to stationary cold and hot water high-pressure cleaners from Kärcher.	☐
Emergency stop switch - for installation in remote control 2.744-015	136	6.635-434.0		☐
	137	6.651-485.0		☐
Remote release button	138	2.637-491.0	Remote release button for stationary high-pressure cleaners from Kärcher: resets the switch-off after 30 minutes of continuous operation or continuous pause.	☐
Remote control I/O, RM 1/2	139	2.744-014.0	Remote control for controlling a stationary cold water high-pressure cleaner. Functions: on/off and dosing of up to two detergents (RM1/RM2).	☐
Multi-key remote control, I/O, RM 1/2	140	2.744-015.0	Multi-key remote control for switching on and off and dosing up to two detergents (RM1/RM2). In conjunction with E-box 2.744-018.0.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H

1.524-969.0



		Order no.	Description	
CONTROL CABLE				
Control cable	141	6.647-222.0	Connection cable available as bulk stock (12 × 1.0 mm ²) for use as control cable. For all stationary HD/HDS machines from Kärcher.	☐
Control cable 3 × 1.5 mm ²	142	6.641-059.0	Connecting cable 3 × 1.5 mm ² . Available by the meter.	☐
Control cable 5 × 1.5 m	143	6.641-061.0	Control cable 5 × 1.5	☐
Control cable 7 × 1.5 m	144	6.641-064.0	Control cable 7 × 1.5	☐
Control cable 10 × 1.5 m	145	6.641-082.0	Control cable 10 × 1.5	☐
Conduit	146	2.420-008.0	Conduit for control cable installation. Consisting of 3 m conduit, 5x conduit clips, 5x dowels, 5x screws.	☐
HIGH-PRESSURE PIPEWORK				
High-pressure pipe kit	147	2.420-006.0	High-pressure pipe kit with 3 m stainless pipe Ø 16 × 2 mm, ID 12 and mounting accessories: compression fitting, 4 pipe clamps, 4 hanger bolts and 4 plastic dowels.	☐
Connection piece, pipe/HP hose, stainless steel (Ermeto)	148	2.638-181.0	Stainless steel	☐
Connection piece, pipe/stop cock, stainless steel (Ermeto)	149	2.638-183.0	For stationary HD/HDS machines: Stainless steel transition piece comprising double nipple, union nut and cutting ring. For connecting the pipe to the shut-off valve.	☐
Stop cock, stainless steel (Ermeto)	150	4.580-163.0	Stainless steel shut-off valve with M 22 × 1.5 thread suitable for connecting pipeline and high-pressure hose for stationary high-pressure systems from Kärcher.	☐
Union nut, stainless steel (Ermeto)	151	6.386-428.0	(VA)	☐
T-screw connection, stainless steel (Ermeto)	152	6.386-465.0	Stainless steel	☐
Stainless steel elbow union 90°	153	6.386-466.0	Stainless steel elbow union 90° with compression fitting (Ermeto) at both ends for 16 mm pipes.	☐
Quick coupling, loose part, M 22 × 1.5	154	6.463-023.0	loose part	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H

1.524-969.0



		Order no.	Description	
HIGH-PRESSURE PIPEWORK				
Connector, galvanised steel	155	2.638-180.0	Alternativ : stainless steel 2.638-181	☐
Shut-off valve, galvanised steel	156	4.580-144.0	Shut-off valve made from zinc-coated steel for stationary high-pressure systems from Kärcher. For connecting the pipeline to the high-pressure hose.	☐
Pipe kit, galvanised steel, 3 m	157	2.420-004.0	High-pressure pipe kit with 3 m galvanised steel pipe Ø 16 × 2.5 mm, DN 11 and fixing accessories: Compression fitting, 4 pipe clamps, 4 hanger bolts and 4 plastic dowels.	☐
Tee, galvanised steel	158	6.386-269.0	Tee (90°), galvanised steel with compression fitting for 16 mm pipes. Fixing material (Ermeto) included.	☐
Elbow union, galvanised steel	159	6.386-356.0	Elbow union, galvanised steel. With 90° angle piece with compression fitting (Ermeto) at both ends for 16 mm pipes.	☐
Pipe insulation, per running meter	160	6.286-147.0	For thermal insulation of pipes. Pipe cladding. Wall thickness 9 mm. PE foam with moisture barrier. Available per running meter.	☐
Adapter piece, galvanised steel	161	2.638-182.0	Alternative: stainless steel 2.638-183	☐
Quick-release coupling, fixed part	162	6.463-025.0	fixed part	☐
Union nut, galvanised steel	163	6.386-423.0	Union nut, galvanised steel. For 16 mm compression fitting.	☐
Cutting ring	164	6.386-357.0	Galvanised steel cutting ring. For 16 mm compression fitting.	☐
PLANT INSTALLATION				
Fine-mesh water filter	165	2.209-806.0	Fine-mesh water filter	☐
Emergency Stop switch	166	2.744-002.0	Emergency Stop switch with ISO housing for wall mounting. With 0.4 m power cord and fixing material.	☐
HOSE TRACK SYSTEM HIGH-PRESSURE CLEANERS				
C-rail holder	167	6.541-027.0	Wall-mounted C-rail holding clamp for hose guide of Kärcher high-pressure cleaners.	☐
C-rail, per running metre	168	6.233-017.0	C-rail profile as a guide track. 30x32 mm, 2 mm wall thickness 1.56 kg/m. Available per running metre.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H 1.524-969.0



		Order no.	Description	
HOSE TRACK SYSTEM HIGH-PRESSURE CLEANERS				
Rail connector	169	6.541-011.0	Rail connector	☐
End stop	170	6.541-025.0	End stop	☐
Cable trolley	171	6.541-026.0	Cable trolley for C-rail profile. 20 kg capacity. Weight 0.11 kg. Galvanised steel ball bearing.	☐
End bracket	172	6.541-028.0	End bracket	☐
Handle	173	6.541-029.0	C-rail profile clamp. Galvanised steel. Plastic clamping parts. Weight 0.06 kg.	☐
Wall bracket	174	6.541-039.0	Wall holder for galvanised steel C-rail profile.	☐
Rail holder wall	175	6.541-012.0	Galvanised steel rail bracket for C-rail profile. Weight 0.235 kg.	☐
Spray lance runner, movable	176	4.042-610.0	moveable	☐
SEALS FOR TRAPEZOIDAL THREAD				
Gasket set with 9x O-rings for TR thread	177	2.880-001.0		☐
COUPLING PARTS				
Rotary coupling				
Rotary coupling	178	4.111-021.0	Reliably prevents twisting of HP hoses. Connection Easy!Lock. Handle protection	☐
	179	4.401-091.0	Reliably prevents twisting of HP hoses. Connection M 22 × 1.5 m. Handle protection	☐
Coupling				
Coupler -2 × M22 × 1,5	180	4.403-002.0	For connecting and extending high-pressure hoses. Connection 2 × M 22 × 1.5.	☐
Connector				
Screw socket for surface cleaners and Servo Control controllers	181	4.111-022.0	For attaching high-pressure nozzles and accessory parts to the HD trigger gun (with nozzle screws) - 1 × M 22 × 1.5/1 × M 18 × 1.5.	☐
Y distributor	182	4.111-024.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H

1.524-969.0



		Order no.	Description	
COUPLING PARTS				
Connector				
Short spray unit	183	4.111-038.0	For attaching high-pressure nozzles and accessory parts to HP trigger gun (with nozzle screws). Not compatible with triple nozzles.	☐
Y distributor	184	4.405-048.0	Offers the option to connect two spray units to the machine. Installation on the high pressure outlet.	☐
EASY!Lock adapter				
Adapter 1 M22AG-TR22AG	185	4.111-029.0	Adapter 1 to connect the old hose with the new hose	☐
Adapter 2 M22IG-TR22AG	186	4.111-030.0	Adapter 2 to connect the old device with the new hose and the old gun with the new hose	☐
Adapter 3 M22IG-TR22AG	187	4.111-031.0	Adapter 3 to connect the old gun with the new spray lance and new servo regulator	☐
Adapter 4 TR22IG-D11	188	4.111-032.0	Adapter 4 to connect the new gun with the old swivel hose	☐
Adapter 5 TR22IG-M22AG	189	4.111-033.0	Adapter 5 to connect the new gun with the old spray lance and new servo regulator with the old spray lance	☐
Adapter 6 TR22IG-M22AG	190	4.111-034.0	Adapter 6 to connect the new device with the old hose and the old hose with the new gun	☐
Adapter 7 M18IG-TR20AG	191	4.111-035.0	Adapter 7 to connect the old spray lance with the new nozzle	☐
Adapter 8 TR20IG-M18AG	192	4.111-036.0	Adapter 8 to connect the new spray lance with the old nozzle	☐
Adapter hose extension 9 TR	193	4.111-037.0	Adapter 9 to connect the new hose with the new hose	☐
Adapter 12 rotary coupling EASY!Lock 22 IG – M22 × 1.8 AG	194	4.111-046.0	Rotatable adapter for connecting EASY!Force high-pressure gun and high-pressure hoses with M 22x1.5 connection	☐
HOSE REELS				
Automatic, self-winding hose reels for wall mounting				
Automatic hose reel, powder-coated steel / plastic, 20 m	195	6.392-074.0	Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	☐
Automatic stainless steel / synthetic material hose drum, 20 m	196	6.392-083.0	Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H

1.524-969.0




		Order no.	Description	
HOSE REELS				
Automatic, self-winding hose reels for wall mounting				
Automatic hose reel, coated, 20 m	197	6.392-106.0	Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	☐
Hose reel, automatic, basalt grey-coated, 20 m	198	6.392-105.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. For example: order no. 6.110-011.0 (ID 8, 20 m, 315 bar) or order no. 6.110-028.0 (ID 8, 20 m, 400 bar Longlife).	☐
Automatic hose reel, stainless steel, includes swivel holder, 20 m	199	6.392-076.0	Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	☐
Automatic stainless steel hose reel, 40 m	200	6.392-442.0	Automatic hose reels provide the highest level of safety and convenience for winding and unwinding HP hoses. Compatible high-pressure hose, e.g. order no. 6.110-076.0 (ID 8, 40 m, 400 bar, 1x hose reel connection attachment kit).	☐
WATER CONNECTION				
Geka coupling				
Geka connector with hose barb, R 3/4"	201	6.388-455.0	with hose liner	☐
Geka connector with hose barb, R 1"	202	6.388-465.0	with hose barb	☐
Geka connector with internal thread, R 1"	203	6.388-458.0	with female thread	☐
STATIONARY HIGH-PRESSURE CLEANING SYSTEMS				
Add-on kit cleaning agents double	204	2.209-006.0	The attachment kit makes it easy to dose a second detergent by remote control.	☐
Add-on kit pressure discharge	205	2.209-007.0	Attachment kit for automatic pressure relief for stationary cold and hot water high-pressure cleaners. For effective protection of the high-pressure system.	☐
Attachment kit with hour counter and pressure gauge	206	2.209-008.0	Attachment kit with hour counter and pressure gauge for stationary cold and hot water high-pressure cleaners. For easy control of the machine's operating time and operating pressure.	☐
Water inlet solenoid valve attachment kit	207	2.209-010.0	Water inlet solenoid valve attachment kit for stationary cold and hot water high-pressure cleaners. The solenoid valve automatically closes the water supply to the high-pressure cleaner when the machine is at a standstill.	☐
Attachment kit stand, 200 mm	208	2.638-276.0	The attachment kit enables stationary high-pressure cleaners from Kärcher to be installed on the ground in a versatile and stable manner. The machine is securely positioned 200 mm from the floor.	☐
Double connecting	209	5.402-001.0		☐
Full-bore valve	210	6.412-021.0		☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H

1.524-969.0

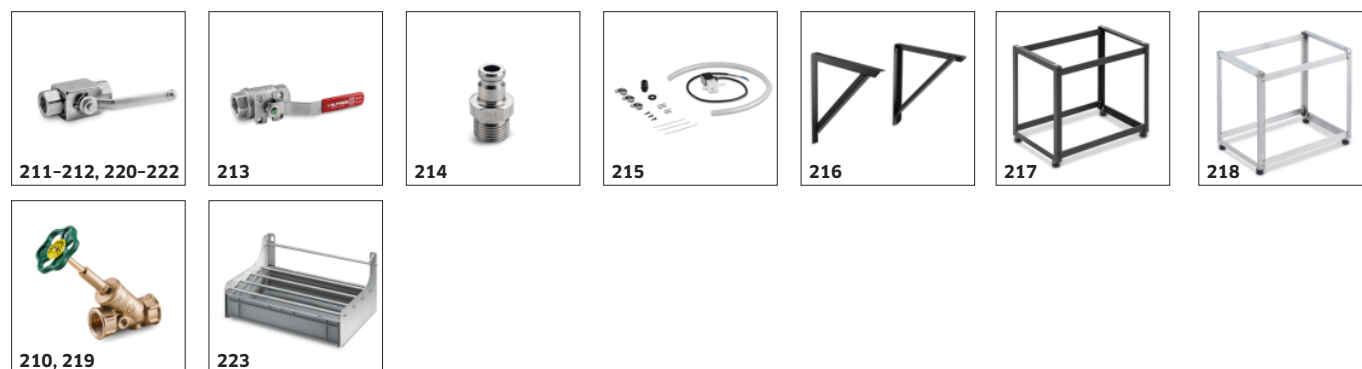

		Order no.	Description	
STATIONARY HIGH-PRESSURE CLEANING SYSTEMS				
High-pressure ball valve	211	6.412-066.0		☐
	212	6.412-386.0		☐
	213	6.412-491.0		☐
Quick release coupling	214	6.463-022.0		☐
RM 1 dosing attachment kit via remote control	215	2.209-005.0	The attachment kit makes it easy to dose the detergent via remote control.	☐
Steel wall bracket, complete	216	2.209-009.0	The wall bracket enables easy and safe installation of a stationary high-pressure cleaner (cold or hot water) on the wall.	☐
Steel floor structure	217	2.210-001.0	Steel floor structure for the installation of stationary high pressure cold water machines. Dimensions W × H × D : 800 × 740 × 540 mm.	☐
Stainless steel floor structure	218	2.210-002.0	Stainless steel floor structure for the installation of stationary high pressure cold water machines. Dimensions W × H × D : 800 × 740 × 540 mm.	☐
STATIONARY HIGH-PRESSURE CLEANERS				
Full-bore valve	219	6.412-022.0		☐
High-pressure ball valve	220	6.412-067.0		☐
	221	6.412-068.0		☐
High-pressure ball valve, stainless steel, G1/2"	222	6.413-500.0	High-pressure ball valve made of stainless steel. Nominal size DN 13, nominal pressure PN 400 for a temperature range up to 100 °C. Connection G1/2" internal thread.	☐
Wall bracket for 2 × cleaning agent cans, stainless steel	223	2.641-703.0	Wall bracket for two cans.	☐
High-pressure hose	224	4.440-172.0		☐

☐ Available accessories.

ACCESSORIES FOR HD 17/12-4 ST H 1.524-969.0



		Order no.	Description	
STATIONARY HIGH-PRESSURE CLEANERS				
Spray lance, rotatable, grey	225	4.760-628.0	Spray lance, rotatable, grey, 2,050 mm.	☐
ULTRA-HIGH-PRESSURE CLEANERS				
Couplings and connectors				
Coupling	226	4.403-004.0	For joining and extending HD hoses. Connection 2 × M 22 × 1.5. Material: Stainless steel.	☐
SELF-SERVICE WASHING SYSTEMS AND EQUIPMENT				
Wash bay equipment				
360° swivelling boom for high-pressure hose	227	4.058-106.0	Swivelling boom for HP-working hose (360° turning circle). Mounted above the washing bay.	☐
Miscellaneous				
Swinging boom 180°, wall-mounted	228	2.637-120.0	Ideal for stationary HD/HDS machines from Kärcher, e.g. in washing bays: wall-mounted swivelling boom with 180° outreach for holding the high-pressure hose.	☐
STATIONARY HIGH-PRESSURE CLEANERS				
Hot water generators				
HWE 860	229	3.070-030.0	The electrical hot water generator is used in combination with a pressure washer and can heat water up to 85 °C.	☐
DRUM AND TANK CLEANING				
Barrel and tank cleaning				
Spray head HKF 30/14-E	230	6.751-061.0	Compact interior cleaning head made of stainless steel for cleaning the interiors of drums and containers with openings of 65 mm or more. Offers an impressively low weight and constant rotation speed by means of an electric motor.	☐

☐ Available accessories.