

STANDARD PERFORMANCE OF Sv VACUUM PUMP: TEST DATES _____

MODEL NO. SV-3028-1 SERIAL NOS. _____



30" Hg BAROMETER - 60°F SEAL WATER IN JOB NOS. _____

SEAL WATER REQUIREMENTS

VACUUM - " Hg	5	10	15			
VOLUME - GPM	15	15	20			

PUMP NAMEPLATE

SPEED - RPM	
VACUUM - " Hg	

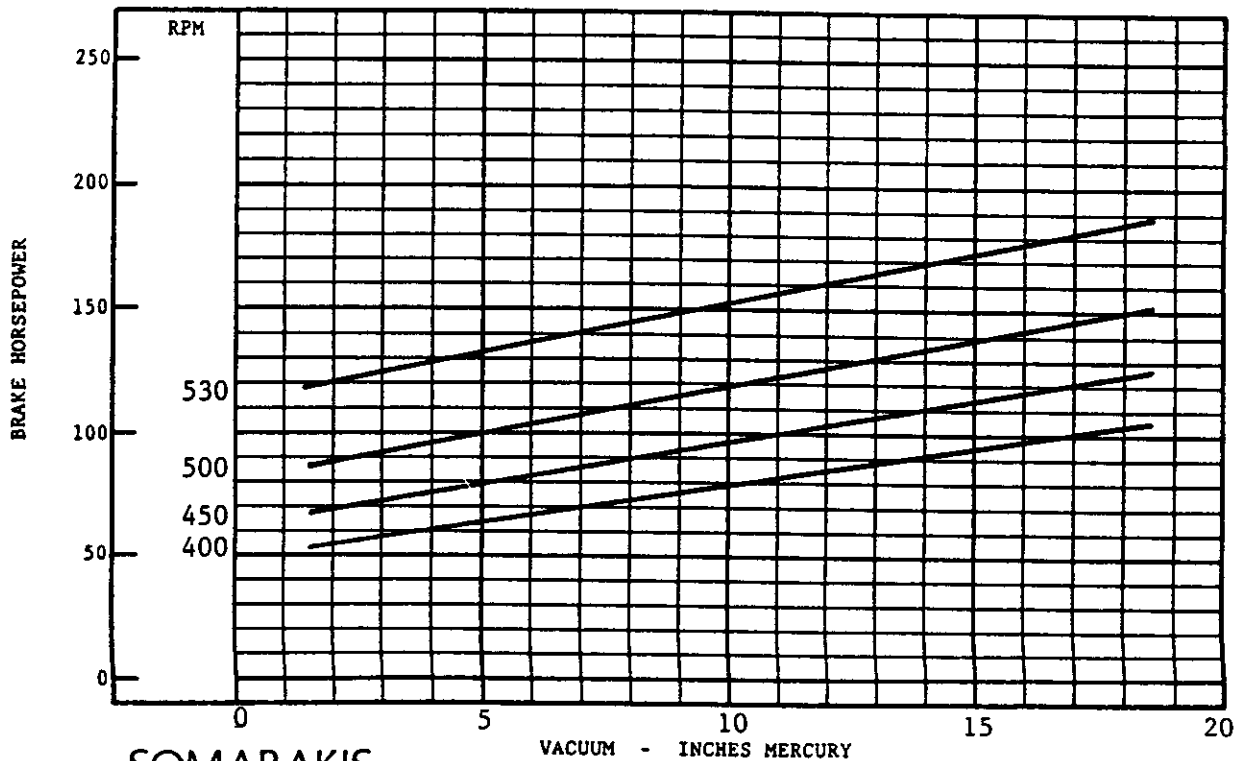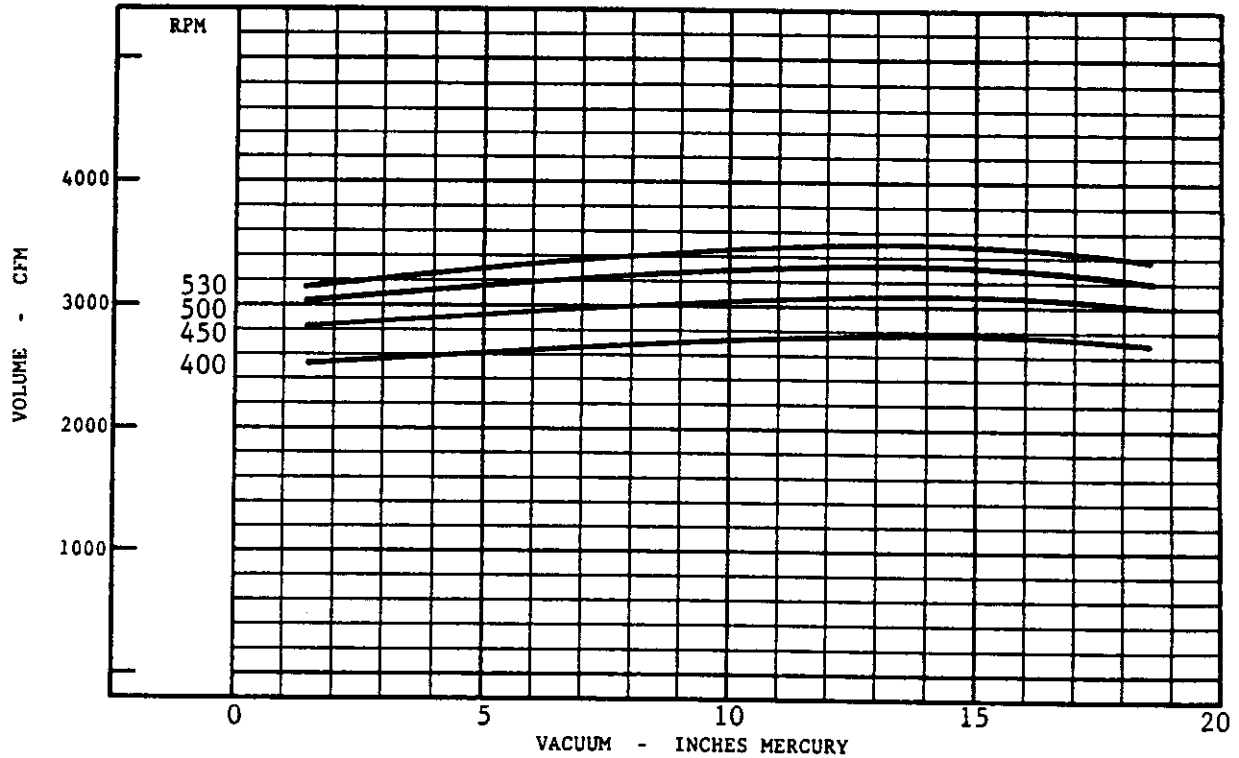

SOMARAKIS

STANDARD PERFORMANCE OF S_V VACUUM PUMP: TEST DATES _____

MODEL NO. SV-3028-2 SERIAL NOS. _____

30" Hg BAROMETER - 60°F SEAL WATER IN JOB NOS. _____



SEAL WATER REQUIREMENTS

VACUUM - " Hg	5	10	15	20		
VOLUME - GPM	25	25	30	40		

PUMP NAMEPLATE

SPEED - RPM

VACUUM - " Hg

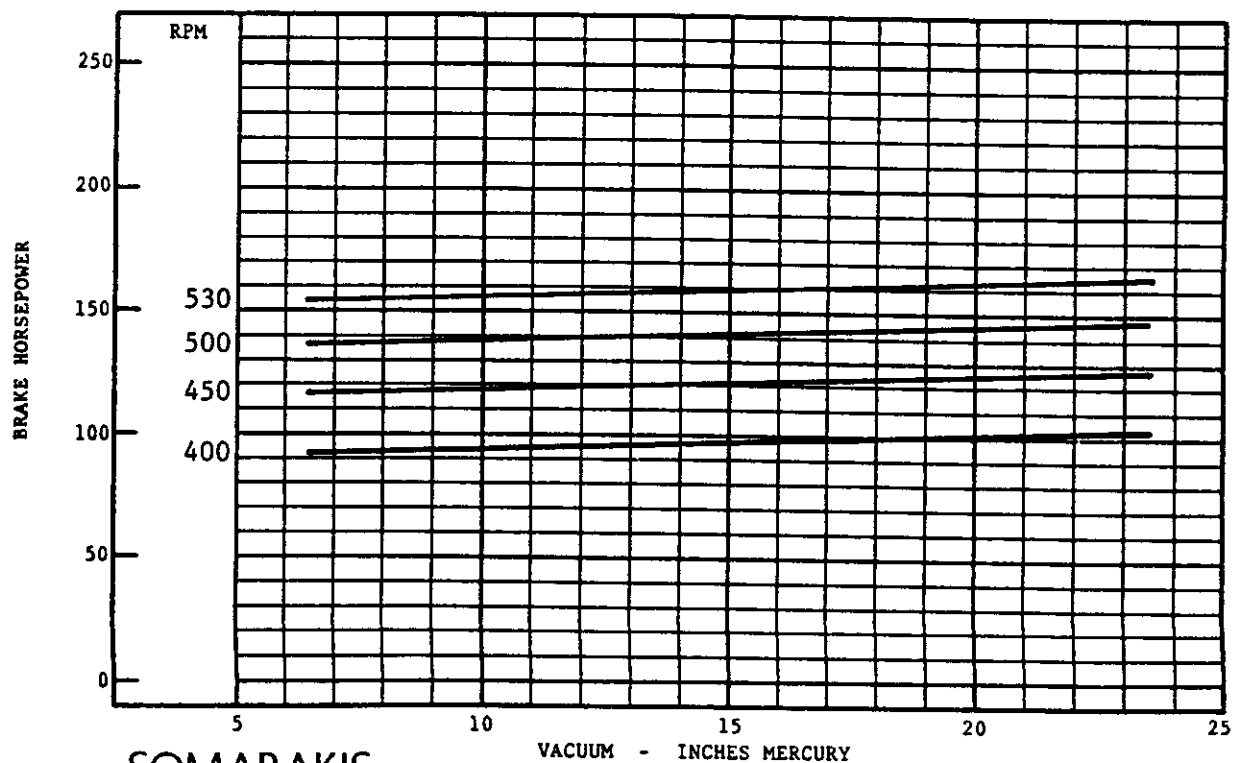
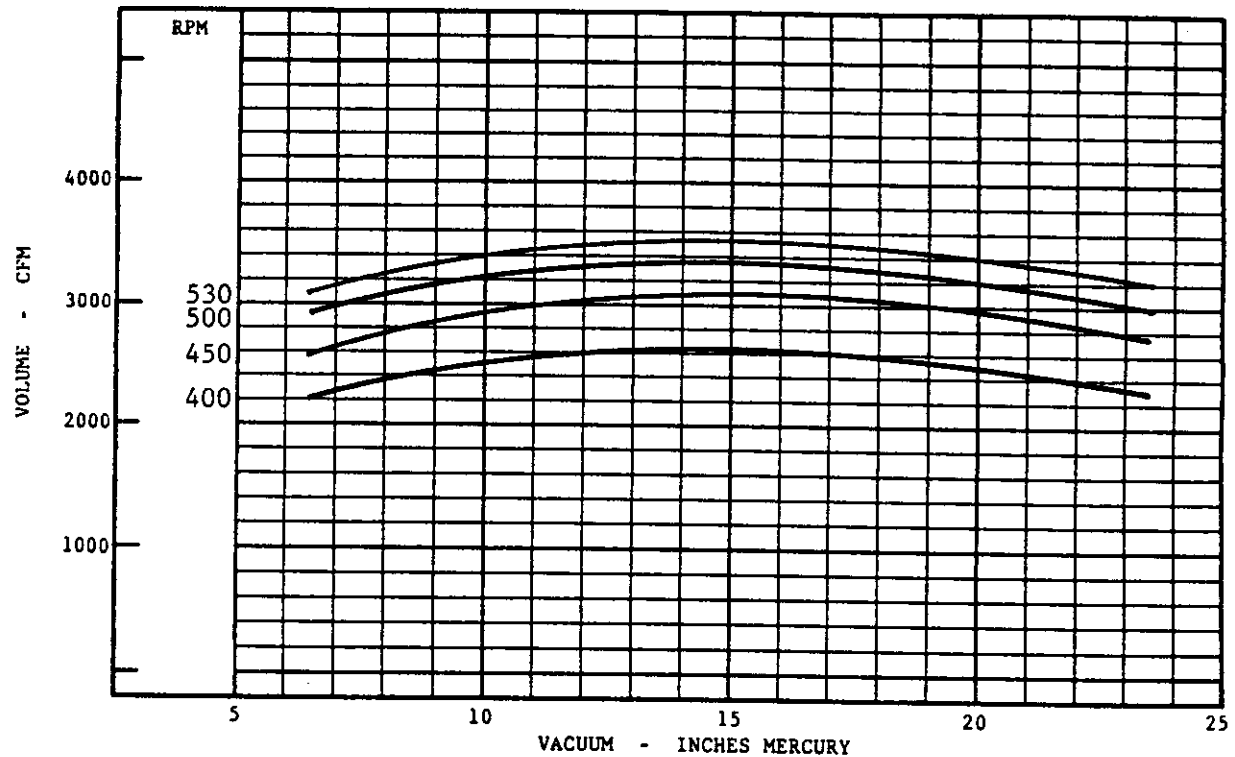


SOMARAKIS

STANDARD PERFORMANCE OF SV VACUUM PUMP: TEST DATES 7-95
 MODEL NO. SV-3028.3 SERIAL NOS. _____
 30" Hg BAROMETER - 60°F SEAL WATER IN JOB NOS. _____

SEAL WATER REQUIREMENTS						
VACUUM - " Hg	15	20	25	26	27	
VOLUME - GPM	20	40	45	47	49	

PUMP NAMEPLATE	
SPEED - RPM	
VACUUM - " Hg	

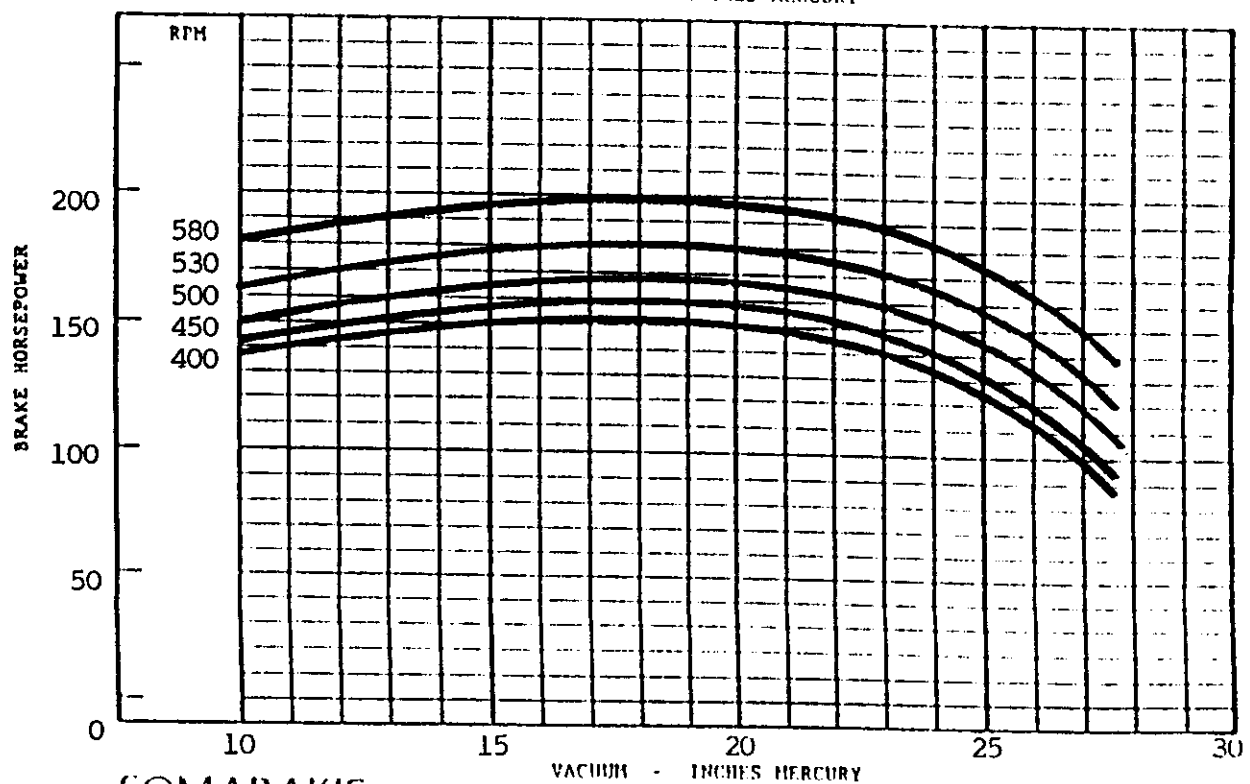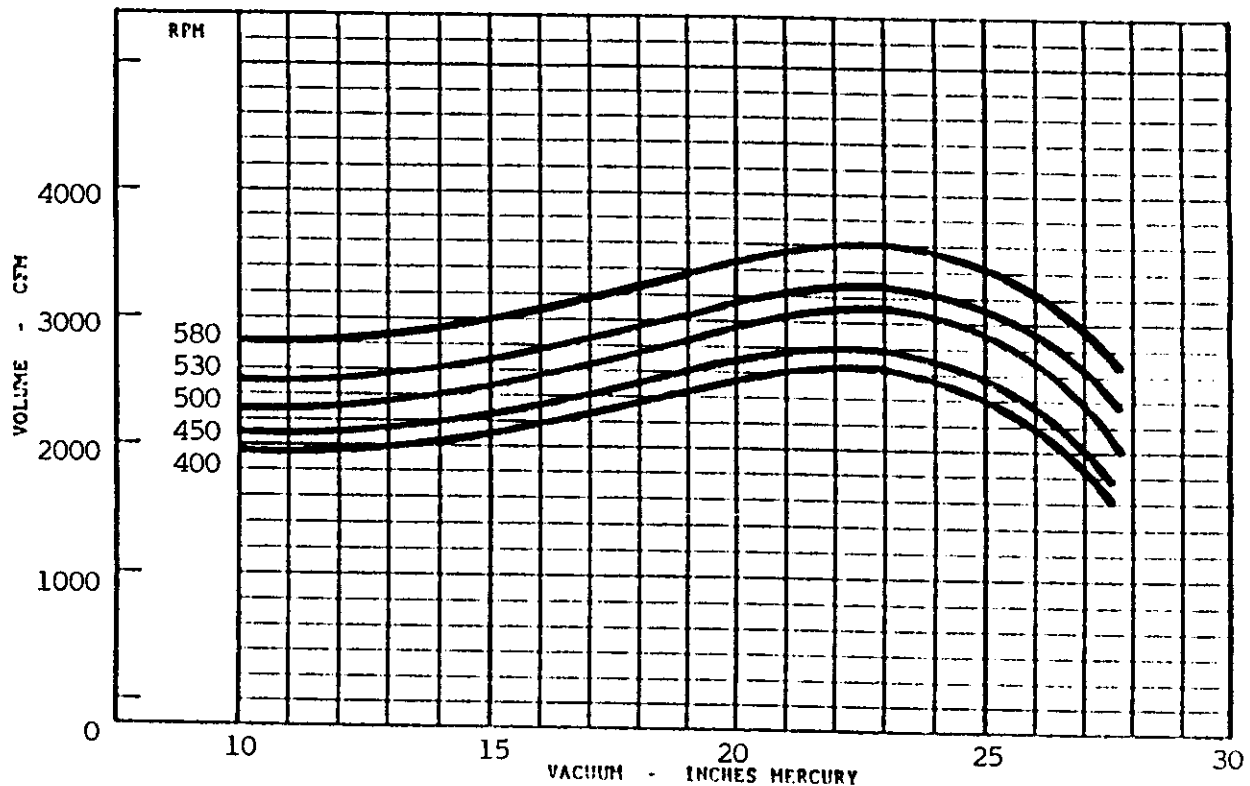

NOTE: 580 RPM is the maximum allowable driven speed for the SV-3028