
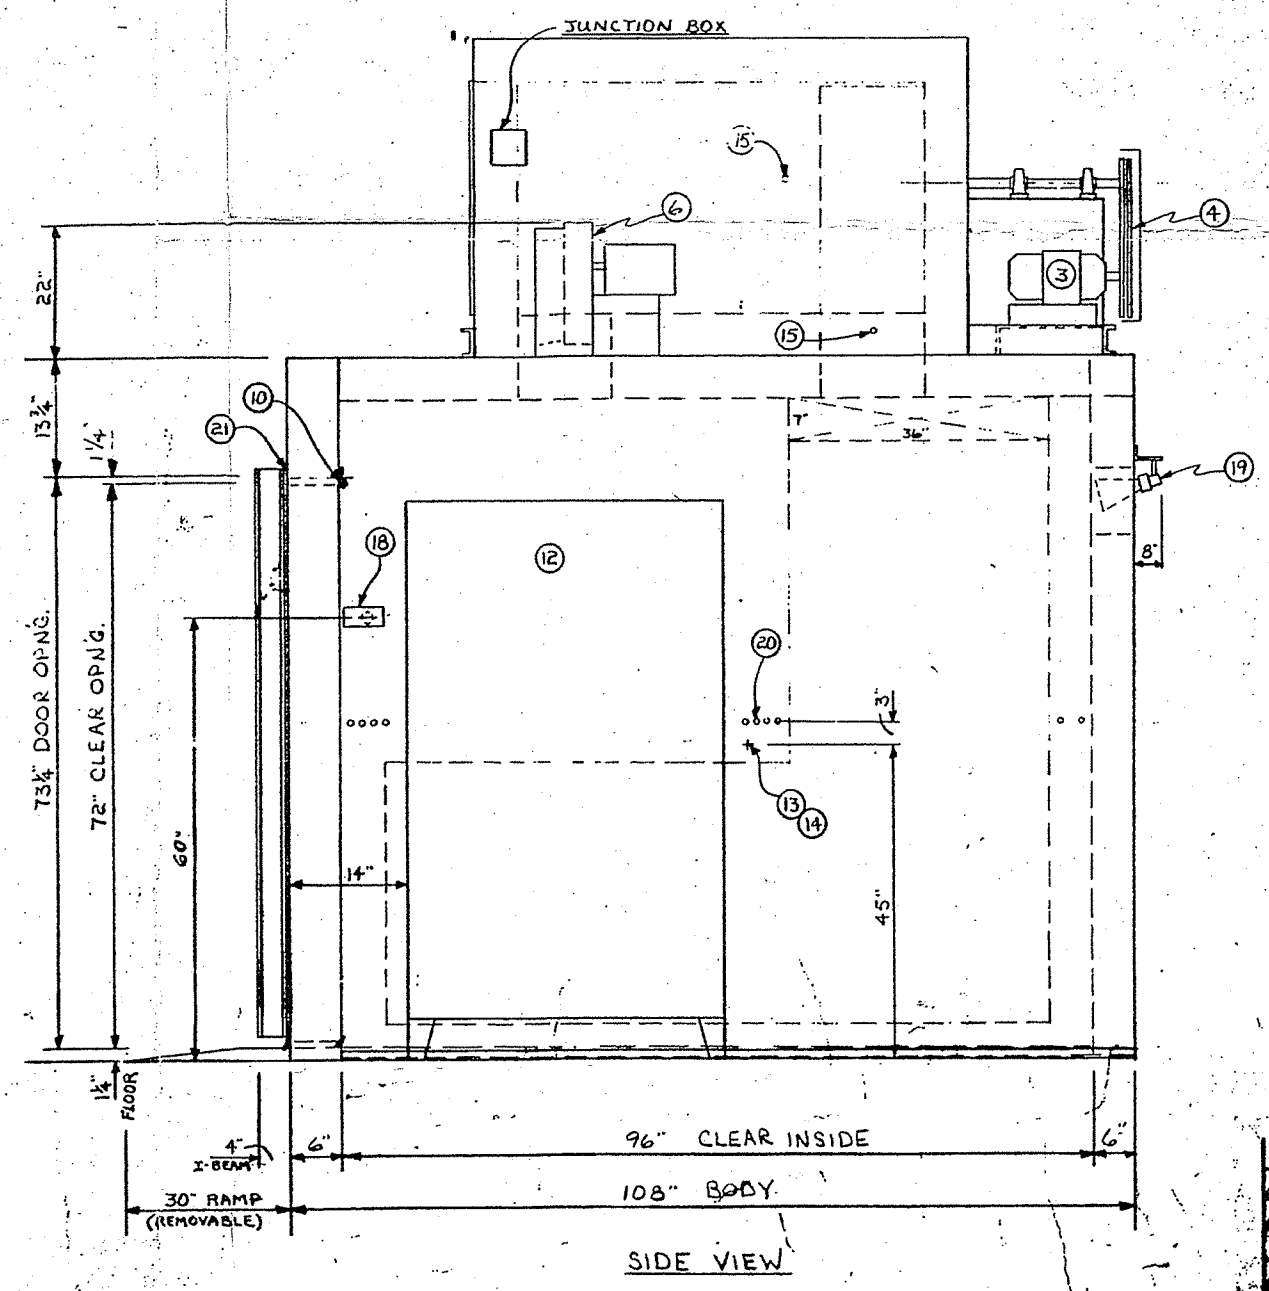
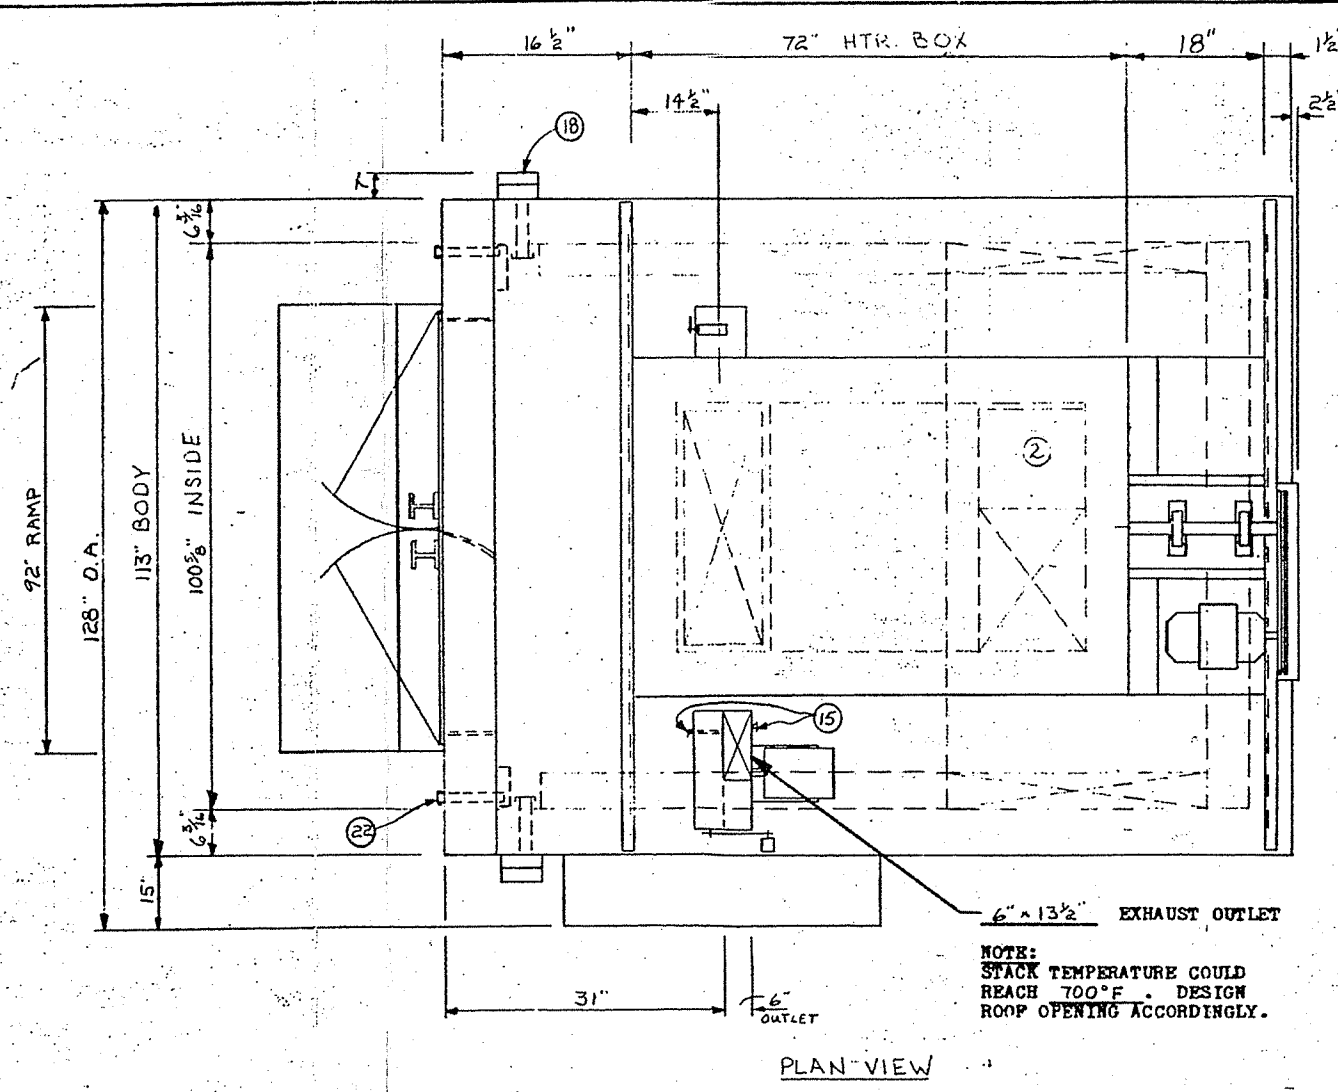


C-22477

DESIGN SPECIFICATIONS	
EXPLOSION VENTING AREA (sq. ft.)	457
DOORS W/EXP. LATCHES	42
OPEN ENDS	NONE
LOOSE ROOF PANELS	NONE
INTERNAL VOL. (cu. ft.)	457
EXP. RELIEF RATIO	1.11
FRESH AIR ADMITTED 70°F.	232
PURGE CYCLE	0 MIN.
VOLATILE	33 GPH VM-P NAPHTHA OREG.
FRESH AIR	9" DIA
DUCT-CUTAWAY	8.4 (sq. in.)
BLADE SIZE	7" W.
EXHAUST	5" x 22"
	377 CFM @ 100°F (5000 FT. ELEV.)
DUCT-CUTAWAY	9.0 (sq. in.)
BLADE SIZE	7" x 10" BLADE

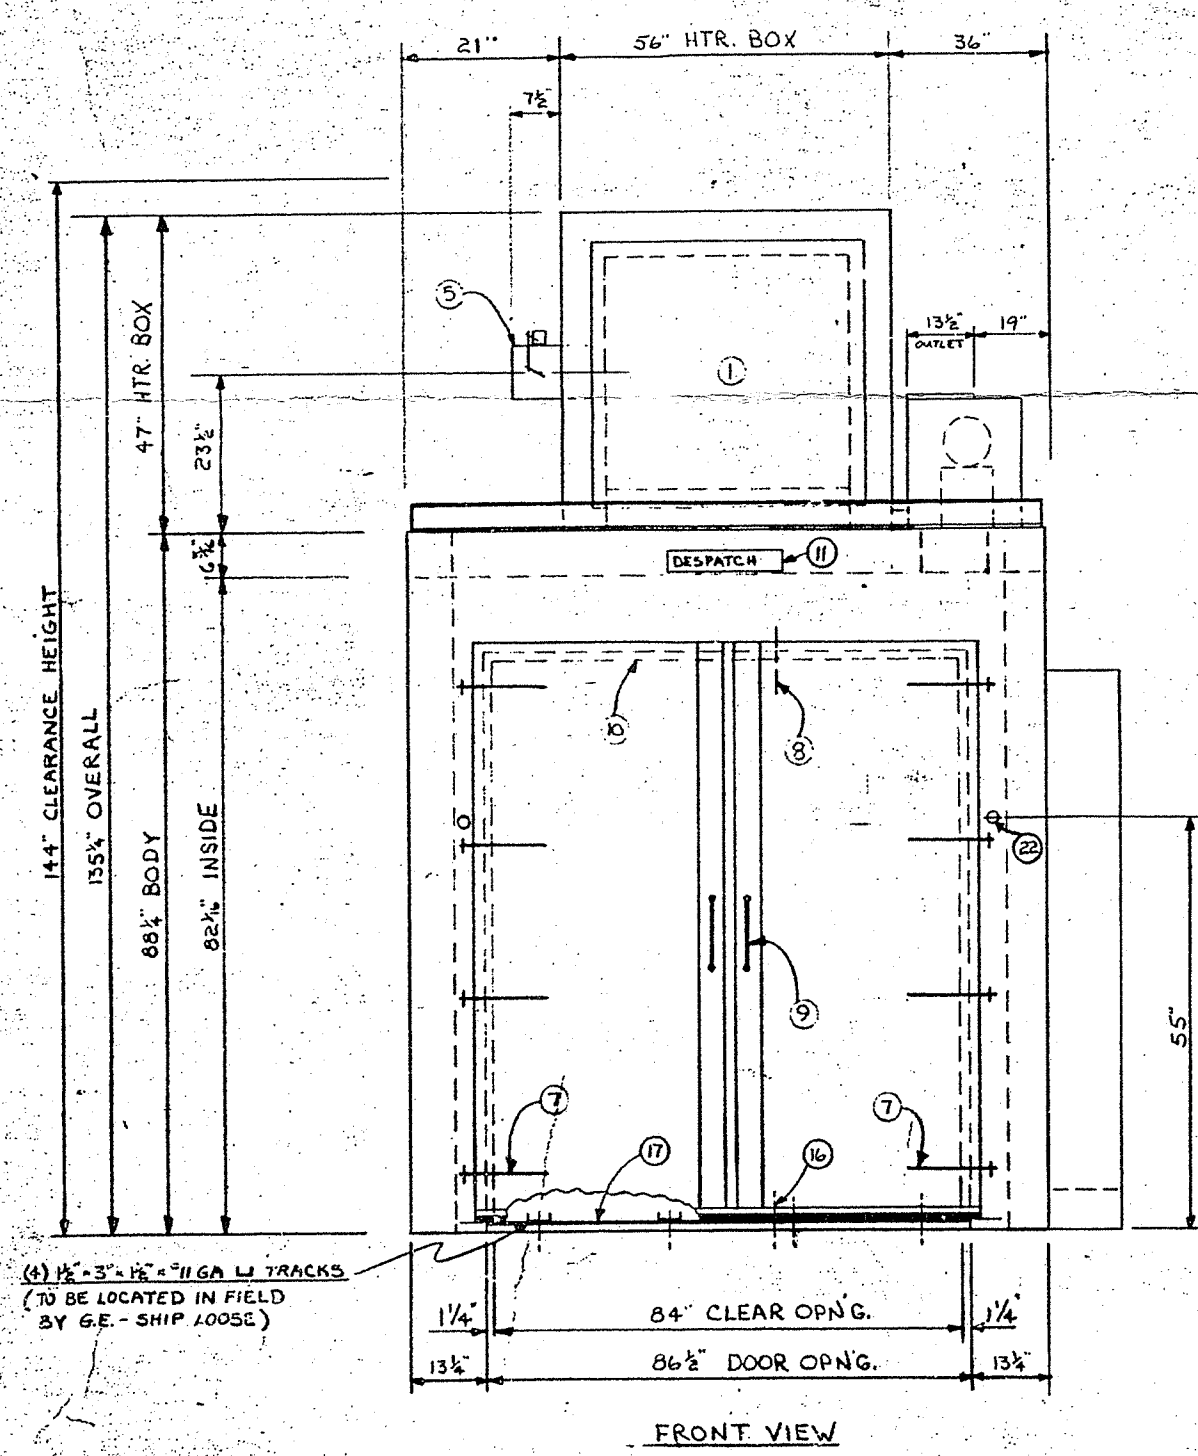

ITEM	PART NO.	QTY.	LIST OF EQUIPMENT
1	001354	1	HEATER - MAXON 405 OVENPAK PROPORTIONING BURNER (500,000 BTU/HR)
2	007078	1	#222 'FC' C.C.W. ROT. FAN, MILD STL., 10,500 CFM. @ 2 1/2" P ₂ (5000' ELEV.) C.I.S. HUB 1 1/2" B.K.S. & S.S. 825 RPM
3	006460	1	#222 INLET CONE M.S.
4	008707	1	10 HP 1750 RPM T.E.F.C. B.B. MOTOR
5	008316	1	FR #215T (G.E. ENERGY EFF)
6	011599	1	D8600-L 'B'-2 GR. ADJ SHEAVE 4.9-5.9 PD. 1 1/2" B. K.S. & S.S.
7	201414	1	'B'-2 GR. SHEAVE 11.0" PD WITH
8	011585	1	SHEAVE BUSHING TYPE 'SK' 1 1/4" B. K.S. & S.S.
9	004554	1	B-60 MATCHED BELTS 17.1" CD.
10	004333	2	NP-27 8KNC. 1 1/4" B.
11	016381	1	SHAFT COOLER 1 1/4" B.
12	089653	1	9" DIA. FRESH AIR INLET W/ADJ. DAMPER
13	089654	1	12M EXHAUST FAN ASSY. WITH (MOTORIZED)
14	089654	1	3 HP 1750 RPM T.E.F.C. B.B. MOTOR
15	089654	1	FR #182T (G.E. ENERGY EFF) (2000 CFM @ 2 1/2" P ₂ @ 5000' ELEV.)
16	007880	8	#1040 HINGE STRAP
17	007847	8	#1041 HINGE BUTT
18	008164	1	TYPE 'A-A' COMPRESSION LATCH + STD STRIKE
19	005894	2	*211 IN DOOR PULL
20	011247	26	LIN. FT. DOOR SEAL FIBERGLASS, 3/4"-2 1/2" (I.S.)
21	063692	1	NAMEPLATE ASSEMBLY
22	089637	1	CONTROL BOX - FLOOR MOUNTED (38" x 72" x 15")
23	089637	1	CONTROL ELEMENT
24	089637	1	HI-LIMIT ELEMENT
25	089637	1	AIR FLOW SWITCH PICK UP TUBE
26	089637	1	TYPE 'A-A' COMPRESSION LATCH + FLOOR STRIKE
27	089637	1	INSULATED FLOOR-1" THICK INS. BOARD (CALSIUM-SILICATE) W/ 1/4" M.S. RT COVER
28	089637	2	6-PT T/C JACK PANEL (MOUNTED) W/ 2" Ø PORT W/CAP
29	089637	1	INTERIOR LIGHT W/ 9" x 9" WINDOW
30	089637	20	1/2" PIPES W/CAPS
31	089637	26	LIN. FT. DOOR SEAL T-15CBS-6 (O.S.)
32	089637	2	6-PT T/C JACK PANEL (MOUNTED) W/ 2" Ø PORT W/CAP

MAX. TEMP. 700°F
OPERATING TEMP. 150-650°F
UNIFORMITY ±10°F @ 150-450°F

FINISH
INT. - NONE
EXT. - LT. BLUE PAINT (W/ 061575)

CONSTRUCTION
INT. #18 GA. MILD STL.
6" ROCKWOOL INSULATION
EXT. #18 GA. MILD STL.
FRONT 3/16" MILD STL. PLT.

POWER HEATER - NATURAL GAS, 1000 BTU/FT², 8-10" W.C.
MOTOR - 460/3/60
CONTROLS - 120/1/60

CONTROLS - HONEYWELL DCP511 PROPORTIONING CONTROL
L-N 2500 MULTI-POINT RECORDER
HONEYWELL AV551AB HI LIMIT CONTROL

SHIP BODY ASSEMBLED W/ HTR. BOX + FLOOR
AS SEPARATE UNITS.

DESPATCH INDUSTRIES, INC.
OCT 12 1988
ENGINEERING DEPT

910013	A2528482-1	143256-60
910013	A2528482	14314-18
PARENT CUST. NO. SERIAL		
DESPATCH INDUSTRIES, INC.		
SPECIAL G-F UNIFLOW OVEN		
GENERAL ELECTRIC		
ALBUQUERQUE NM		
D-1430-087562-D-00		