
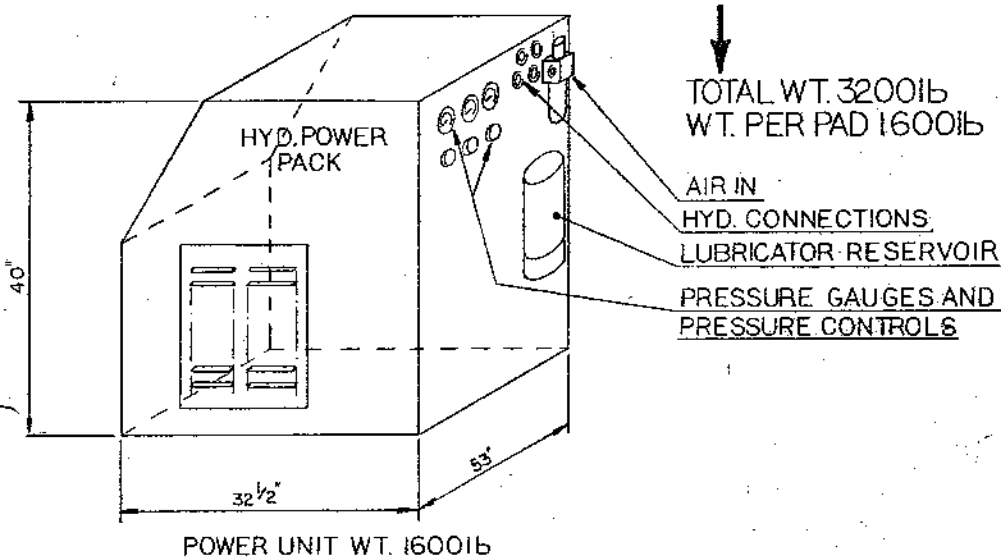
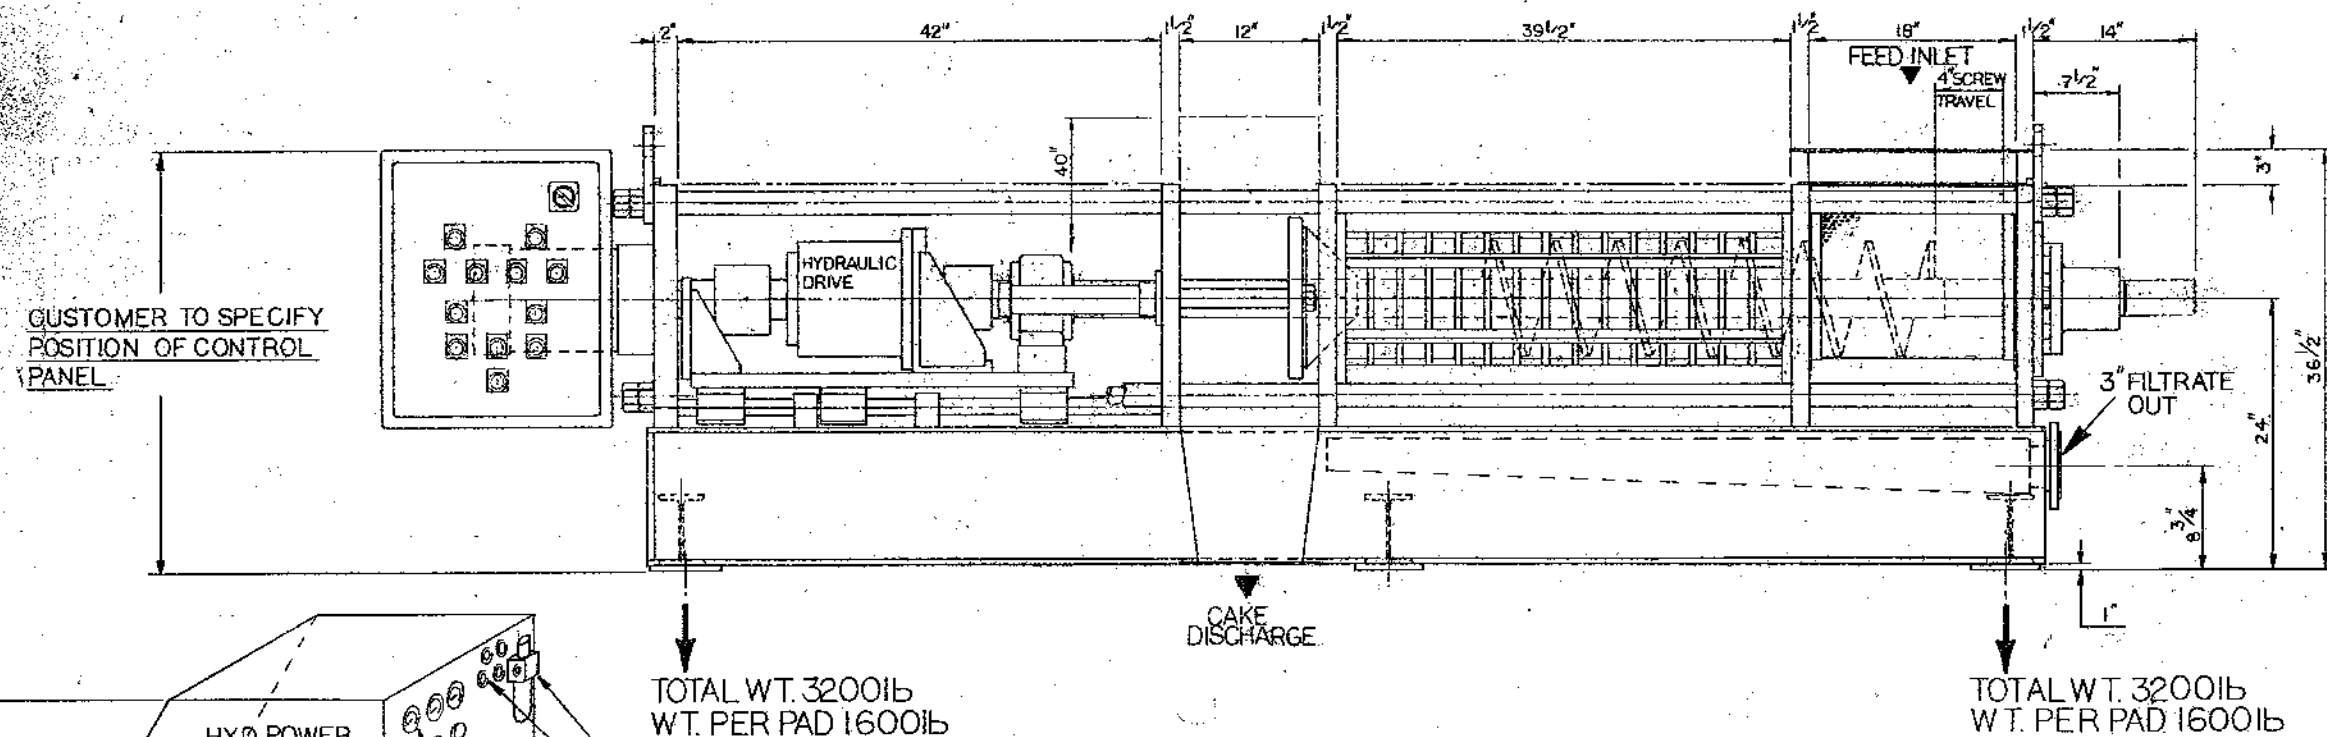


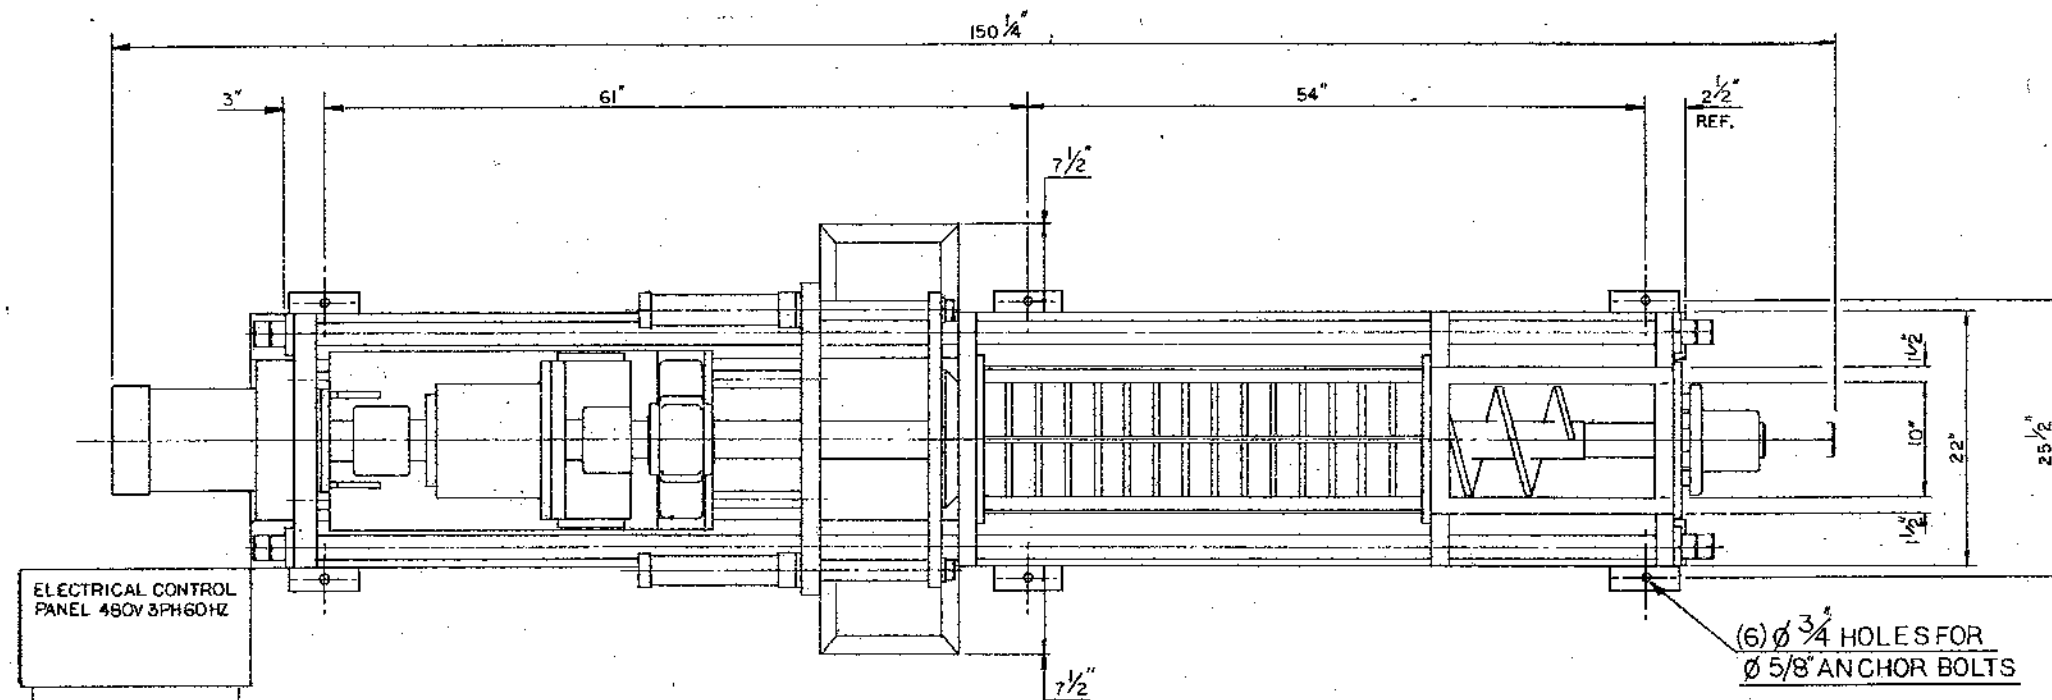

NOTES:-

1. SCREW PRESS HANDED AS SHOWN UNLESS OTHERWISE SPECIFIED
2. ANCHOR BOLTS BY OTHERS.
3. PAINT SPECIFICATIONS:-
ONE COAT PITTSBURGH POLYAMIDE EPOXY PRIMER
TWO COATS 'PITTHANE' ACRYLIC ALIPHATIC URETHANE ENAMEL
4. ONE UNIT REQ'D.
5. HYD. POWER UNIT TO BE 4 FT. MAX. FROM FILTER PRESS
6. TOTAL WT. (INCL. HYD'S) 8000lb
7. PRESS WT. (LESS HYD'S) 6400lb
8. WEIGHTS ARE FOR PRESS WITH CAKE
9. ALL WETTED PARTS ARE 316 SS EXCEPT FOR CONE AND B'HEADS WHICH ARE A36

PERRIN JOB NO. 17576

Perrin

WILLIAM R. PERRIN Co. Ltd.

AJAX, ONTARIO

THIS DRAWING AND ALL THE INFORMATION THEREON IS THE PROPERTY OF WILLIAM R. PERRIN CO. LTD. AND IS CONFIDENTIAL AND MUST NOT BE MADE PUBLIC OR COPIED. THIS DRAWING IS LOANED SUBJECT TO RETURN UPON DEMAND AND IS NOT TO BE USED DIRECTLY OR INDIRECTLY IN ANY WAY WITHOUT WRITTEN CONSENT OF OUR COMPANY.

UNLESS OTHERWISE SPECIFIED
TOLERANCES ON:
2-PLA DE DECIMALS ± .03"
3-PLA DE DECIMALS ± .005"
FRACTIONS ± 1/16"
✓ FINISH MACHINE
BREAK ALL SHARP EDGES

TITLE: GENERAL ARRANGEMENT OF
250MM(10") PUSHER SCREW PRESS

PROJECT: KERWIN PAPER

DATE: 22ND JUNE '92

OWN BY: G. WILLIAMS

DRAWING NUMBER:

SCALE: N.T.S.

APPROVED: *de*

PSP 10-1000

REV.	DATE	BY	DESCRIPTION
Δ			