



V-SERIES MIXER





2551 320th ST
Rock Valley, Iowa, 51247
712.476.BOSS (2677)
sales@herdbossfeeders.com

HERDBOSSFEEDERS.COM



V-SERIES MIXER

THE SPECS	810V	980V	1210V	1810V
CAPACITY TOP OF STEEL	705 ft ³ (20 m ³)	880 ft ³ (24.9 m ³)	1,094 ft ³ (31 m ³)	1,616 ft ³ (45.8 m ³)
CAPACITY W/ RUBBER EXT.	838 ft ³ (23.7 m ³)	1,020 ft ³ (28.8 m ³)	1,239 ft ³ (35 m ³)	1,821 ft ³ (51.6 m ³)
LIGHT RATION CAPACITY	20,950 / ft ³	25,500 / ft ³	30,975 / ft ³	45,525 / ft ³
HEAVY RATION CAPACITY	29,330 / ft ³	35,700 / ft ³	43,365 / ft ³	63,735 / ft ³
WIDTH W/ FLIP-UP CONVEYOR	120 in (3 m)	120 in (3 m)	120 in (3 m)	120 in (3 m)
WIDTH W/O MAGNETIC TRAY	103 in (2.6 m)	103 in (2.6 m)	103 in (2.6 m)	103 in (2.6 m)
TUB WIDTH	103 in (2.6 m)	103 in (2.6 m)	103 in (2.6 m)	103 in (2.6 m)
OVERALL LENGTH	332 in (8.4 m)	336 in (8.5 m)	342 in (11.4 m)	450 in (11.4 m)
OVERALL HEIGHT TOP OF STEEL	106 in (2.69 m)	119 in (3 m)	134 in (3.3 m)	131 in (3.3 m)
OVERALL HEIGHT W/ RUBBER EXT.	116 in (2.9 m)	129 in (3.27 m)	144 in (3.5 m)	138 in (3.5 m)
OVERALL HEIGHT W/ DOOR BRACKET	119 in (3 m)	119 in (3 m)	n/a	n/a
WEIGHT EMPTY	22,800 lb (10,342 kg)	23,500 lb (10,659 kg)	25,400 lb (11,521 kg)	34,500 lb (15,649 kg)
FLOOR THICKNESS	3/4 in AR200 (19.1 mm)	3/4 in AR200 (19.1 mm)	3/4 in AR200 (19.1 mm)	3/4 in AR200 (19.1 mm)
WALL THICKNESS	3/8 in AR200 (9.5 mm)	3/8 in AR200 (9.5 mm)	3/8 in AR200 (9.5 mm)	3/8 in AR200 (9.5 mm)
AUGER FLIGHTS	3/4 in AR200 (19.1 mm)	3/4 in AR200 (19.1 mm)	3/4 in AR200 (19.1 mm)	3/4 in AR200 (19.1 mm)
SS CONVEYOR FLOOR	3/16 in SS (4.8 mm)	3/16 in SS (4.8 mm)	3/16 in SS (4.8 mm)	3/16 in SS (4.8 mm)
MINIMUM HP REQUIREMENTS	140	180	200	250

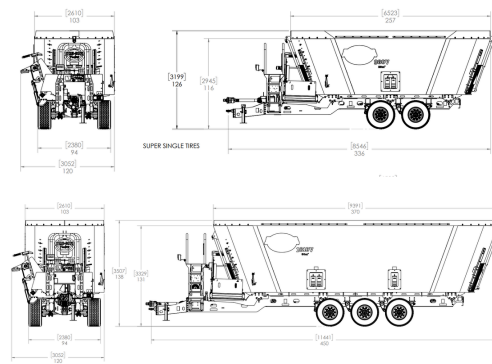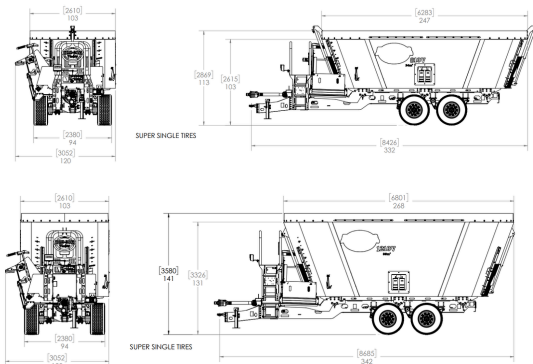

OPTIONS

- Conveyors
 - Flat Dual
 - 3' Flip-Up
 - Fixed Sliding Dog Leg
- Weighing Conveyor
- Stainless Steel Tub Liners
- Axles
 - Rear Steering w/ Hydraulic Brakes
 - W/ Rear Hydraulic Brakes
- Standard Clevis Hitch
- Hard-Weld Auger Edge
- Luggers Tires
- Hydraulic Jack
- Comer 2-Speed Gearbox
- Zuidburg Powershift Vertical Mount Transmission
- Interchangeable Parts: Several models have the same or interchangeable parts for simplified maintenance.

STANDARD FEATURES

- 3/4" Abrasion Resistant Steel Floor
- 3/4" Hd Construction Standard Plate Frame
- 2-20k Axles With 32-Ton Tandem Spring Ride Suspensions
- All 1/4" Stainless Steel Conveyor
- Super Single Tires 435/50R19.5
- 6-Point "Level Load" Weighing System By Digi-Star (Most Accurate in the Industry Vs. Hitch and Axle Weigh Bar)
- Dual Magnet Tray System With Backstop
- Rear Commodity Door
- Bull Pull Hitch
- A Combination of Curved and Triangle Knives for Maximum Cutting Efficiency
- Heavy Duty C188 Conveyor Chain